SPECIAL 2026
WORLDWIDE

HAZET®
Das Werkzeug



30 years of partnership

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

RACEBORN

SWW26/EN/XX/0

OFFICIAL SUPPLIER

PORSCHE MOTORSPORT

LIMITED SPECIAL EDITION

30 years of partnership



Limited edition:
Strictly limited to
300 pieces!



Limited edition badge with consecutive number

Key for tool trolley 179NXXL-7PD incl. high-quality HAZET Porsche Motorsport key ring

Welcome Case

179NXXL-7/430PD


EAN-No. 4000896281077

Note: The tool trolley shown is included once in the set. The views shown at (front and rear) are for illustrative purposes only.

Available from April 2026!





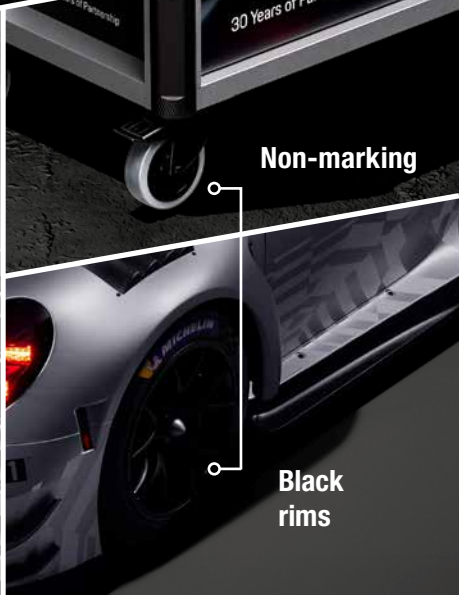

163-644/266-PD




163-515/16-PD






163-683/6-PD



163-682/89-PD

s 6x7 – 34x36 mm, *s* 6 – 32 mm

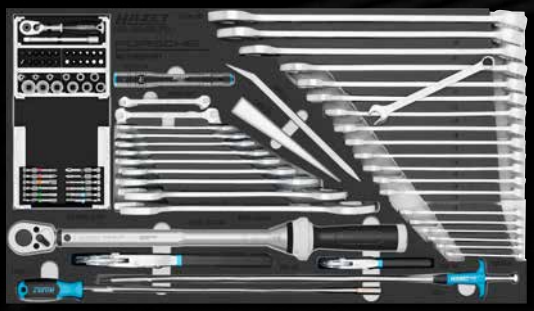

HAZET and Porsche Motorsport celebrate 30 years of partnership:

Highlight – our strictly limited tool trolley

Assistent® **179NXXL-7PD** in an attractive **Porsche 911 GT3 R design.**

This edition is exclusive and limited to **300 pieces** worldwide! This coveted collector's item is rounded off with **430 expert tools**, including some from the popular **Racing Tool Line.**

Inspired by the design of the brand new **Porsche 911 GT3 R**, the tool trolley combines striking Porsche Motorsport elements with the highest **HAZET** quality. Don't waste time in securing the special statement of our joint **30-year success story.**

163-645/45-PD



163-510/8-PD



RACING TOOL LINE



6

Screwdriver set

4 x		0.5x3.0 0.8x4.0 1.0x5.5 1.2x6.5 mm
2 x		PH 1 PH 2



811/6-PD

EAN-No. 4000896275731

HAZET SMART CASE



50

6.3 1/4" 6.3 1/4" 6.3 1/4"

SmartCase socket set

2200SC-2-PD

EAN-No. 4000896276011



1/2" Torque wrench

40 – 200 Nm · ±3%

5122-3CT-PD

EAN-No. 4000896276745


Made in Germany



Our new powder coating plant sends a strong signal about our Remscheid location and our corporate philosophy, which is based on state-of-the-art, professional production **Made in Germany**. It complements our fully automatic laser/punching and bending centres as well as our welding robots.

As one of the most modern facilities in Europe, the powder coating plant ensures that our Assistent® brand tool trolleys and work benches receive their characteristic, long-lasting protective coating. At the same time, the use of materials and energy is more sustainable.

This makes our premium products even more flexible and faster to produce, including significantly faster colour changes, in our highest HAZET top quality.

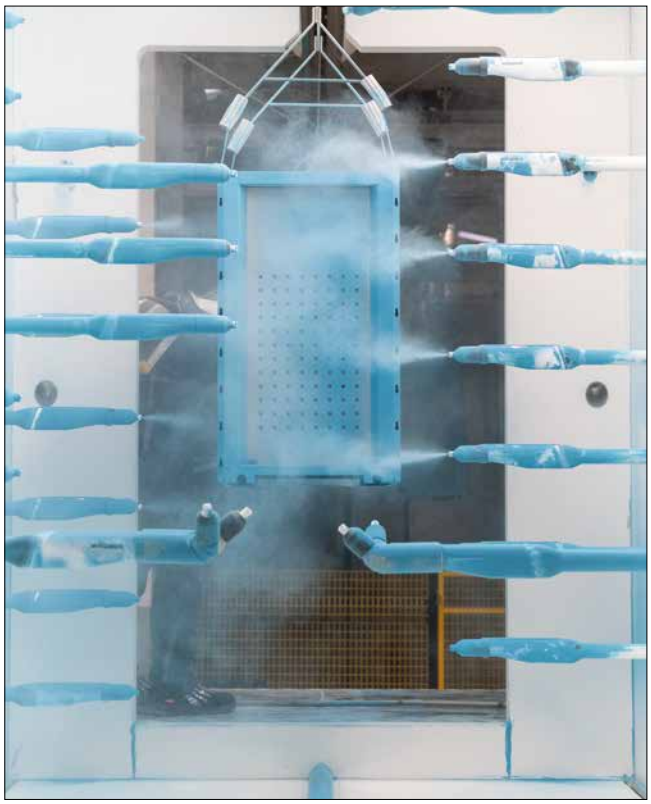

INDIVIDUAL COLOURS:

- You can choose an individual colour from a production run of just one tool trolley (applies to the colour of the trolley body).
- 24 RAL colours can be implemented at short notice (colours in stock)
- Other colours on request

Available from 1 piece

RAL1021	RAL5012	RAL7016
RAL2002	RAL5013	RAL7021
RAL3000	RAL5015	RAL7035
RAL3002	RAL6005	RAL8022
RAL3020	RAL6018	RAL9003
RAL5005	RAL7004	RAL9005
RAL5010	RAL7012	RAL9006
RAL5011	RAL7015	RAL9016



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

ESD


SAFETY

for electronic components!

Protect yourself against the dangers of electrostatic discharge (ESD) and ensure safety and quality for your electrostatic-sensitive parts (ESP)!



NEW!





179N-ESD

Made entirely from conductive materials!

- The tool trolley Assistent 179N-ESD features special materials and earthed areas to prevent damage or destruction of electrical components in the event of possible static discharge
- Certified according to IEC 61340-5-1

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179N-7ESD	7	276516	
179N-8ESD	8	276493	



- ESD powder coated handle



- ESD-compatible plastics: Cover and edge protection



- Full-surface ESD powder coating (HAZET blue)
- ESD marking
- ESD-compatible non-marking castors (grey)



- ESD academy (Product certificate)

WORTH KNOWING:


- Even low voltages significantly < 100 V impair functions, damage or destroy sensitive electronic components
- Problem: You often do not notice it until it's too late and the device is defective!
- Solution: ESD-compatible tool trolleys support the safe handling of components



Tool trolley 176N-7 with three assortment variants

- Central locking, lockable with cylinder lock and 2 folding keys

Solvent-resistant plastic cover with textures and large recessed, fully usable work surface




Mutual drawer locking for minimum tilting risk





3/3

Fixing option for accessories



Handle can be mounted on the left or right



Tool trolley 176N-7 with 193 expert tools

193

163-613/152



Assortment

163-673/25



163-614/16



NEW!

176N-7/193
EAN-No. 4000896264810

Tool trolley 176N-7 with 256 expert tools


256

163-613/152




Assortment

163-673/25



163-407/35 **163-122/3**



163-614/16



Including 2128N-1




NEW!

176N-7/256
EAN-No. 4000896279067

Tool trolley 176N-7 with 292 expert tools


292

163-630/76



Assortment

163-628/32



163-632/27



163-629/100



Including 2128N-1



163-631/32



176N-7/292
EAN-No. 4000896270774

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

You have the choice between our tool trolley with stainless steel or plastic work surface or the stable work bench. Choose from our assortment: HAZET **Basic or Comfort!**

Basic assortment: 234 expert tools

234

3/3+

Including HiPer 90 teeth · 4° · **1000 Nm** (1/2")

163-513/122N



163-526/41N



163-672/46



Including 2128N-1





Basic assortment with tool trolley 179N-8

179N-8/234

EAN-No. 4000896278947

NEW!



NEW!

Basic assortment with tool trolley 179NX-8

179NX-8/234

EAN-No. 4000896278961

Stainless steel work surface

EDELSTAHL® Rost frei



Basic assortment with work bench 179NW-7

179NW-7/234

EAN-No. 4000896278985

NEW!

Comfort assortment: 320 expert tools

320



Comfort assortment with tool trolley 179N-8

179N-8/320

EAN-No. 4000896279005

NEW!



NEW!

Comfort assortment with tool trolley 179NX-8

179NX-8/320

EAN-No. 4000896279029

Stainless steel work surface

EDELSTAHL® Rost frei



Comfort assortment with work bench 179NW-7

179NW-7/320

EAN-No. 4000896279043

NEW!

3/3+

Including HiPer 90 teeth · 4° · **1000 Nm** (1/2")

163-513/122N




163-526/41N



163-672/46



163-609/61

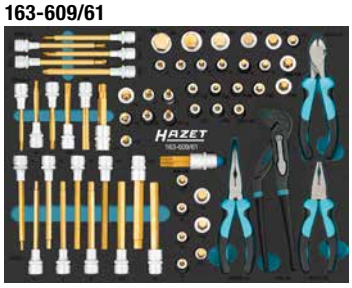

163-372/25



Including 2128N-1



179NXL-8/427 with 427 expert tools



762-15
Clamping range:
33 mm
Length: 150 mm

Made in Germany

762-26
Clamping range:
56 mm
Length: 260 mm

Incl. grip pliers wrench

More information on page 25

NEW!

Stainless steel work surface
EDELSTAHL Rost frei

427



4/3+

179NXL-8/427
EAN-No. 4000896279081

Including
HiPer
90 teeth · 4° ·
1000 Nm (1/2")


Assortment

163-646/61

s 6 x 7 – 34 x 36 mm · *s* 6 – 32 mm; *s* 10 – 22 mm · *s* 8 – 19 mm · 762-15, 762-26



163-652/231

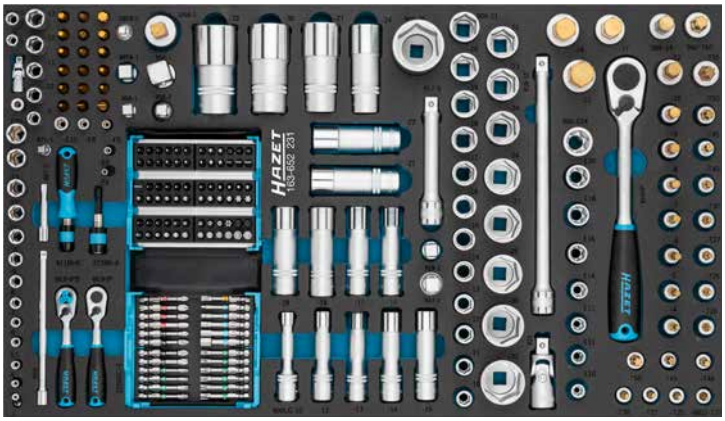


163-480/57N



163-479/26




163-382/3

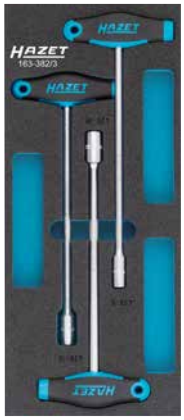

163-172x50



163-675/45

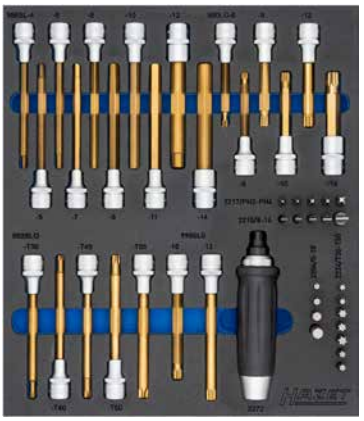

163-124/4


Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

179NXL-8/440 with 440 expert tools

163-644/266



163-528/56 s 6x7 – 34x36 mm, s 6 – 32 mm, s 8 – 19 mm, s 6x7 – 24x27 mm

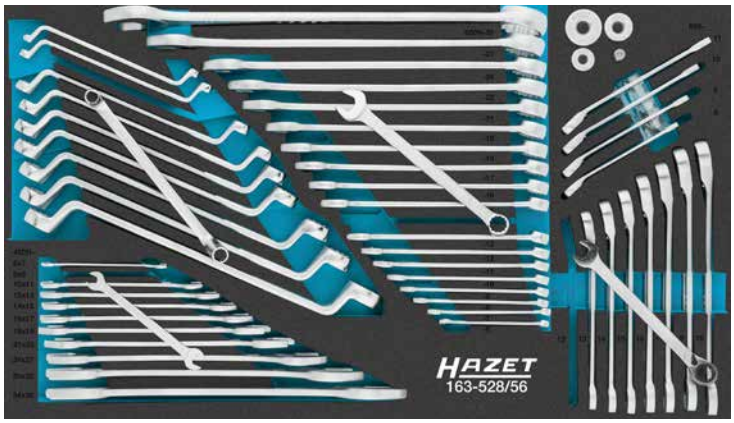

Stainless steel work surface



440


4/3+

179NXL-8/440
EAN-No. 4000896247974

Including HiPer 90 teeth · 4° · **1000 Nm** (1/2")

Assortment

163-647/45

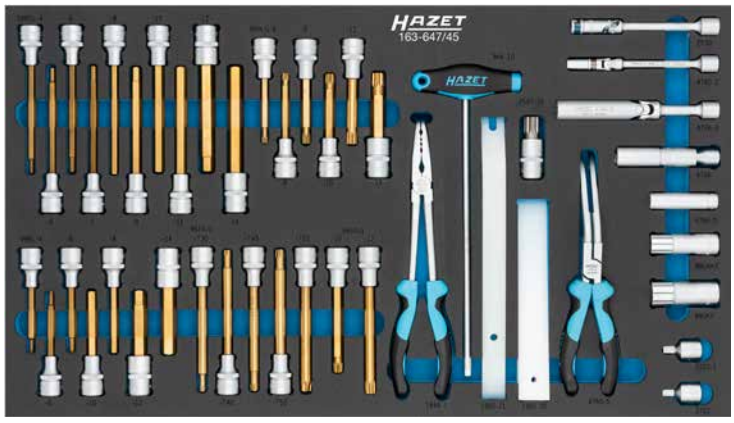

163-605/39N



163-604/34N



Supplement:

60

163-650/60




Order directly:

163-650/60
EAN-No. 4000896274567

179NXL-8S1/515 with 515 expert tools

Including

HiPer
90 teeth · 4° ·
1000 Nm (1/2")

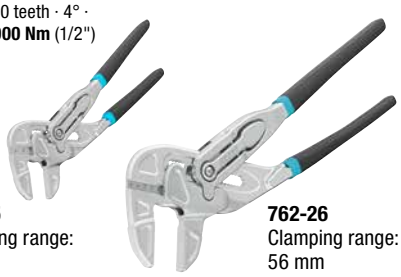

762-15
Clamping range: 33 mm
Length: 150 mm

762-26
Clamping range: 56 mm
Length: 260 mm

Made in Germany

Incl. grip pliers wrench

More information on page 25



4/3+

Stainless steel work surface
EDELSTAHL Rost frei

515

179NXL-8S1/515
EAN-No. 4000896275915

Assortment



NEW!

Made in Germany

Incl. new 3/4" impact adapter, quick coupler

More information on page 53

163-646/61 *s* 6 x 7 – 34 x 36 mm · *s* 6 – 32 mm; *s* 10 – 22 mm · *s* 8 – 19 mm · 762-15, 762-26



163-650/60




163-644/266



163-645/45



163-647/45

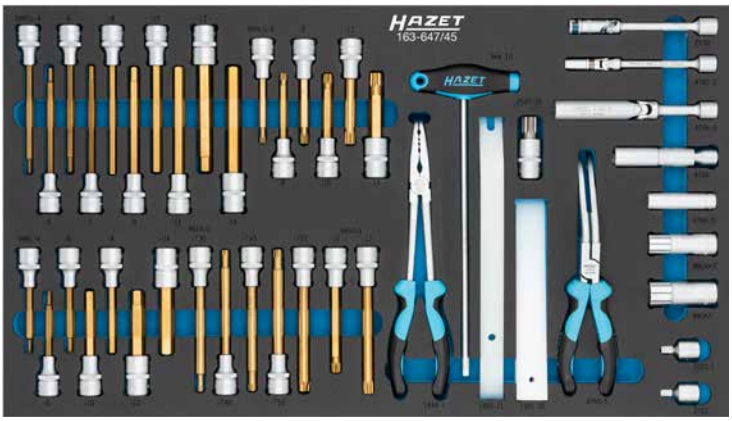

163-648/38



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

179NXL-8S1/425 with 425 expert tools

Including

HiPer
90 teeth · 4° ·
1000 Nm (1/2")



762-15
Clamping range: 33 mm
Length: 150 mm

762-26
Clamping range: 56 mm
Length: 260 mm

Made in Germany

Incl. grip pliers wrench

More information on page 25



4/3+

Stainless steel work surface
EDELSTAHL Rost frei

425

179NXL-8S1/425
EAN-No. 4000896275939

Assortment



163-646/61 *s* 6 x 7 – 34 x 36 mm · *s* 6 – 32 mm; *s* 10 – 22 mm · *s* 8 – 19 mm · 762-15, 762-26



SPECIAL EDITION

Tool trolley, empty
179NXL-8S1


4/3+

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NXL-8S1	8	274802	



163-652/231

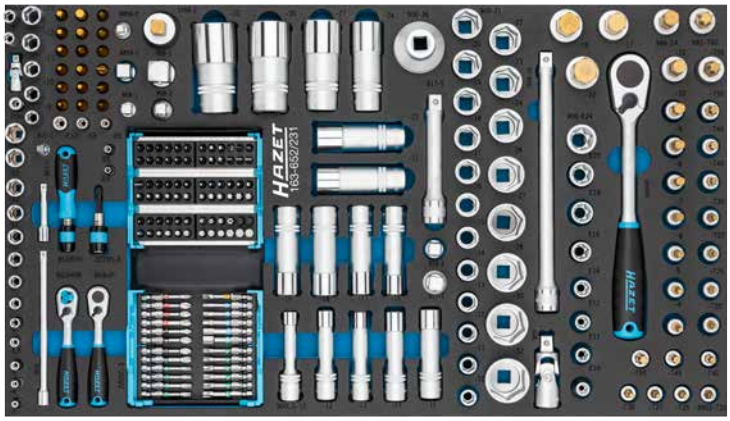

163-645/45



163-651/58



163-649/30



179NXXL-7/352 with 352 expert tools

5/3+

Including
HiPer
90 teeth · 4° ·
1000 Nm (1/2")

Assortment

Including
2128N-1



Stainless steel
work surface
EDELSTAHL Rost frei


352



163-481/194N



163-511/4

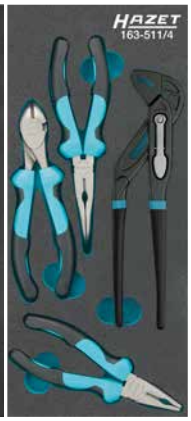



762-15
Clamping range: 33 mm
Length: 150 mm



Made in Germany

762-26
Clamping range: 56 mm
Length: 260 mm

Incl. grip pliers wrench


More information on page 25

163-646/61

s 6 x 7 – 34 x 36 mm · *s* 6 – 32 mm; *s* 10 – 22 mm · *s* 8 – 19 mm · 762-15, 762-26



163-382/3

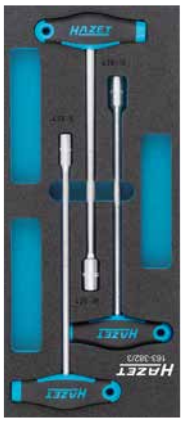

179NXXL-7/352
EAN-No. 4000896279104

NEW!

163-480/57N



163-510/8





Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

179NXXL-8/399 with 399 expert tools

5/3+

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")

Assortment

Including 2128N-1



399


Stainless steel work surface
EDELSTAHL® Rost frei



163-481/194N 6.3 ¼ · 10 ⅜ · 12.5 ½ · 6.3 ¼



163-172x50

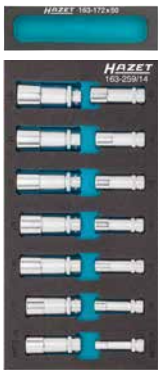

163-259/14

163-646/61

s 6 x 7 – 34 x 36 mm · *s* 6 – 32 mm;
s 10 – 22 mm · *s* 8 – 19 mm · 762-15, 762-26



163-674/15





762-15
Clamping range: 33 mm
Length: 150 mm



762-26
Clamping range: 56 mm
Length: 260 mm

Made in Germany


Incl. grip pliers wrench

More information on page 25

163-480/57N



163-380/4N

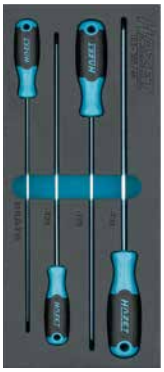

179NXXL-8/399
EAN-No. 4000896279128

NEW!

163-479/26



163-382/3





179NXXL-8D/619 with 619 expert tools



Over 30% more drawer depth!

With lateral door and socket strip



Stainless steel work surface

EDELSTAHL Rostfrei

619



163D-10/30
s 5x5.5 – 34x36 mm
s 6x7 – 36x41 mm




163D-9/42
s 8 – 32 mm
s 5.5 – 32 mm



163D-1/148N



163D-2/103

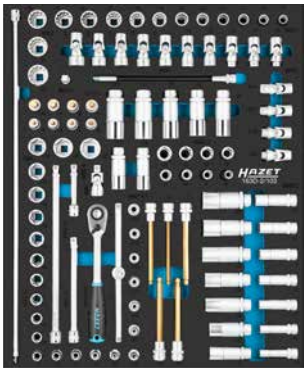

179NXXL-8D/619
EAN-No. 4000896245185

1/2++ 1/2++


163D-7/24N




163D-6/53N



163D-3/94

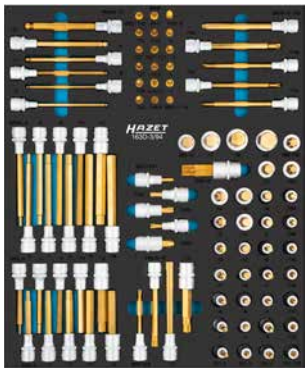

163D-4/44

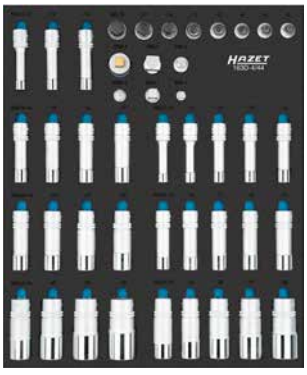

Including HiPer
90 teeth · 4° · **1000 Nm** (1/2")

Assortment


163D-11/11



163D-8/13



163D-5/24

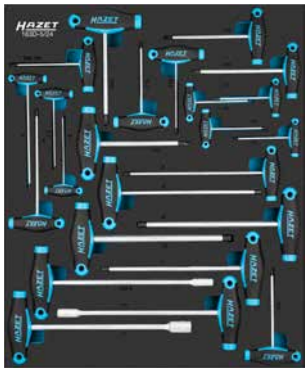


163D-12/30



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

TOOL TROLLEYS AND WORK BENCHES

- 179N series – Suitable for every application: with a narrow width of 785 mm up to XXL format with a width of 1,133 mm and a depth of up to 642 mm
- Extremely robust design thanks to double-walled construction
- Secure locking and heavy-duty drawer concept
- Sealed working surfaces protect the trolley interior
- Heavy-duty wheels with non-marking castors
- Developed and produced by HAZET "Made in Germany"

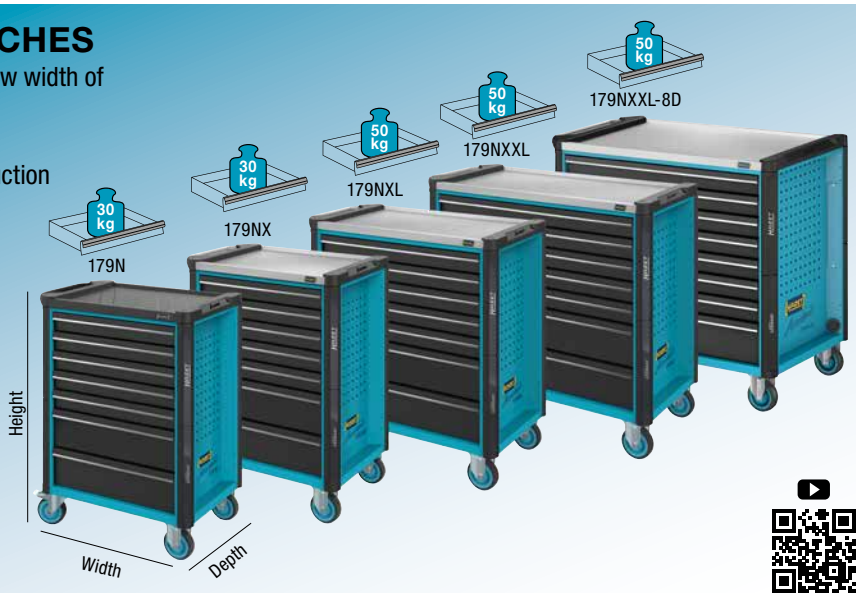

Assistent®
Made in Germany

Service trolley 167



3/3+ | 3/3+

Made in Germany

HAZET No.	Side walls	EAN-No. 4000896 +	
167-3	–	205332	
167-3S	✓	207206	

176N

- Plastic cover with textures
- W x H x D: 780 x 1018 x 498 mm



3/3

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
176N-7	7	264681	

179N

- Plastic work surface
- W x H x D: 785 x 1020 x 518 mm



3/3+

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179N-6	6	214570	
179N-7	7	214488	
179N-8	8	214587	
179N-9	9	220236	

179NX

- Stainless steel work surface
- W x H x D: 785 x 1020 x 518 mm



3/3+

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NX-6	6	215560	
179NX-7	7	215577	
179NX-8	8	215584	

179NXL

- Stainless steel work surface
- W x H x D: 959 x 1020 x 518 mm



4/3+

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NXL-6	6	215171	
179NXL-7	7	215164	
179NXL-8	8	215218	

179NXXL

- Stainless steel work surface
- W x H x D: 1133 x 1020 x 518 mm



5/3+

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NXXL-7	7	214624	
179NXXL-8	8	214778	

179NXXL-8D/3

- **Extra deep tool trolley**
- Stainless steel work surface
- W x H x D: 1167 x 1020 x 642 mm



1/2++ | 1/2++





179NXXL-8D/3

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NXXL-8D	8	242931	
179NXXL-8D/3	8	245178	

179NW

- Mobile work bench
- W x H x D: 1150 x 964 x 600 mm



3/3+







Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NW-7	7	219629	
179NW-8	8	222933	

179NWL

Large drawer width 5/3+

5/3+

NEW!

Drawer concept:
- 6 flat drawers, height: 81 mm, loading capacity: 50 kg
- 1 high drawer, height: 166 mm, loading capacity: 50 kg
- 100 % sliding-out with ball-bearing telescopic rails – self-closing

Body:
- Wood multiplex birch work surface, 30 mm, oiled, replaceable
- Complete welded construction of the entire body for tough daily workshop use
- Optimised, yielding edge protection on all four corners with real impact protection thanks to internal damping concept


High performance chassis:
- 2 swivel castors with dual brake


Locking concept:
- Lateral lock position protects the key and lock from damage
- Highly secure closing system with central locking technology for optimum protection of property
- 2-stage locking:
  – Central locking, lockable with cylinder lock and 2 folding keys
  – Mutual drawer locking for minimum tilting risk

Loading capacity:
- Total loading capacity (static): 1000 kg / (dynamic): 750 kg



Lateral cylinder lock with 2 folding keys



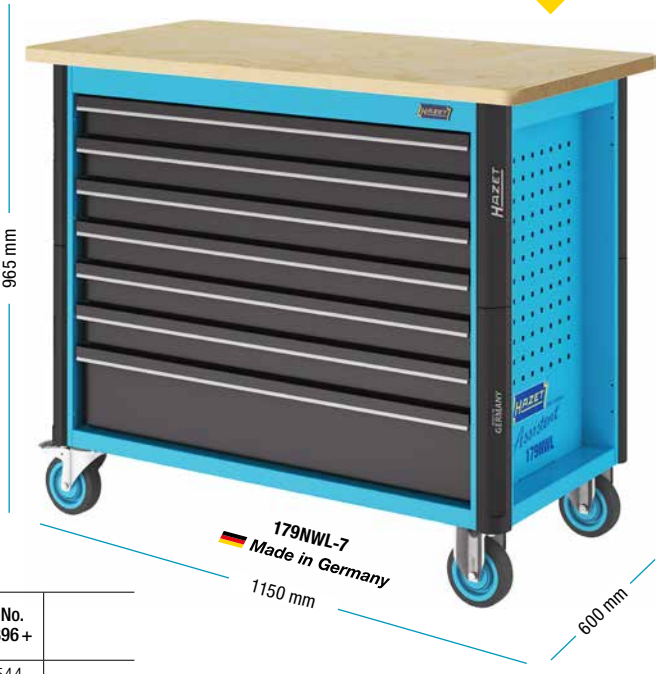

Made in Germany


HAZET No.	Number of drawers	EAN-No. 4000896 +	
179NWL-7	7	280544	
179NWL-8	8	280568	

Assistent® Tool trolley / Work bench accessories

Protective mats

NEW!



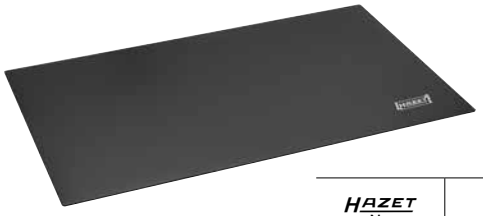

- Robust PVC protective mat for stainless steel work surface
- Black matt, high-quality surface
- Oil and solvent resistant
- Thickness: 2 mm


HAZET No.	Protective mat for tool trolley Assistent	Dimensions (mm)	EAN-No. 4000896 +	
179NX-39	179NX	439 x 554 x 2	279647	
179NXL39	179NXL	439 x 730 x 2	279623	
179NXXL-39	179NXXL	439 x 904 x 2	279661	
179NXXLD-39	179NXXL-D	564 x 904 x 2	279685	











HAZET No.	Designation	EAN-No. 4000896 +	
161N-3D	Cable drum (without holder)	237517	
161N-3D/2	Cable drum incl. holder	237654	
161N-5D	Socket strip for 179NXXL-8D	245161	
161T-176N/4	Separation sheet set for flat drawer	265619	
161T-176N/4H	Separation sheet set for high drawer	265596	
176N-26	Perforated tool panel for 176N-7	265633	
176N-261	Mounting rail	265657	
179-35	Can holder, for 3 cans	141074	
179N-21	Lateral door for 179N · 179NX · 179NXL · 179NXXL	215553	
179N-21D	Lateral door for 179NXXL-8D	245154	
179N-26	Perforated tool panel for 179N · 179NX	215522	
179N-33	Paper bin incl. holder	236206	
179N-35	Can holder, for at least 4 cans	224258	
179N-40	Basic fixture for 179N · 179NX · 179NXL · 179NXXL · 179NXXL-8D	215591	

HAZET No.	Designation	EAN-No. 4000896 +	
179N-42	Laptop holder for 179N · 179NX · 179NXL · 179NXXL	215621	
179N-45	Tablet holder	224210	
179N-46	Impact wrench holder	224265	
179N-50	Bracket for an L-Boxx	243068	
179N-51	Bracket set for two L-Boxxes	243051	
179N-510	Bracing surface for L-Boxx bracket 179N-51	243075	
179N-75	Vice fastening for 179N · 179NX · 179NXL · 179NXXL	241835	
179ND-75	Vice fastening for 179NXXL-8D · 179NXXL-8D/3	252343	
179NW-11	Machinist's vice fastening set	221967	
179NXL-26	Perforated tool panel for 179 NXL	215539	
179NXXL-26	Perforated tool panel for 179NXXL	215546	
180-24	Document holder	110827	
180-34	Holder for paper reel	120840	
2175N	Machinist's vice	013685	

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Universal tool bag, large

NEW!

with 73 expert tools

73



191T-6/73
EAN-No. 4000896275373

OR



HAZET No.	Designation	EAN-No. 4000896 +	
191T-6L	Large tool bag, empty	272693	

with 89 expert tools

89



191T-6/89
EAN-No. 4000896279791

Universal tool bag, small, with 51 expert tools

51



191T-5/51
EAN-No. 4000896275359

HAZET No.	Designation	EAN-No. 4000896 +	
191T-5L	Small tool bag, empty	272679	

Tool bag, small, with 51 expert tools

51



191T-1/51
EAN-No. 4000896260003

HAZET No.	Designation	EAN-No. 4000896 +	
191T-1L	Small tool bag, empty	258482	

Tool set, with 83 expert tools

83

In L-Boxx



190L-136/83
EAN-No. 4000896243303

3/8" High-voltage tool set, with protective insulation, with 27 expert tools

27

- Produced according to current DIN specifications – optimum protection and highest level of safety thanks to constant quality control
- Recess for retrofitting with 3/8" torque wrench, with protective insulation 5109KV

In L-Boxx



150/27
EAN-No. 4000896245550

3/8" High-voltage tool set, with protective insulation, with 52 expert tools

52

- Joint development with a leading car manufacturer and in accordance with the German TÜV SÜD
- Surface: with protective insulation

In professional case





150/52
EAN-No. 4000896247578



Non-slip and waterproof base tray:
For a stable stand when open and closed.
Height 60 mm



Ergonomic back padding:
For high wearing comfort



Removable tool board:
For a perfect tool overview



Organised system:
Individual compartments for each tool allow quick access and easy insertion

The HAZET tool rucksack is more than just a means of transport – it is a well thought-out system for professionals who value organisation, safety and comfort!



HAZET tool rucksack: The smart solution for professionals

- **More freedom, less weight:** the modern alternative to heavy tool cases.
  It combines maximum mobility with perfect organisation and reliably protects your equipment – no matter where the job takes you.
- **Your workshop to go:** With 38 compartments and 44 fastening options, every tool is immediately to hand.
- **Flexible and well thought-out:** Removable tool board, elastic Molle straps and separate compartments for notebook or tablet make the rucksack versatile.
- **Robust and safe:** Waterproof base tray, hard-shell compartment for sensitive parts and hard-wearing material protect against dust, moisture and damage.
- **Ergonomic comfort:** Padded back section and optimum weight distribution ensure comfortable carrying – even when fully loaded.
- **Practical extras:** Magnetic fastener for quick opening, side pocket for water bottle and case strap for transport on trolleys.

Technical data:

- Material:
  – Fibre thickness: 600D
  – Fibre density: 78T polyester
  – Polyurethane (PU) impregnation layer
  – Lightweight, robust and water-repellent
- Volume: 21.5 litres
- Dimensions: H x W x D: 510 x 390 x 290 mm
- Payload weight: 15 kg

Tool rucksack with 56 expert tools



+



56

NEW!

191R-1/56
EAN-No. 4000896279586

HAZET No.	Contents	
191R-1	Tool rucksack	1
9230B-2	Cordless screwdriver	1
2300SH-1	SmartHolder tool holder, 39 pieces	39
839P	Phase tester	1
811/6	Screwdriver set	6
2140N-30	Machinist's hammer, length: 300 mm	1
1850M-22	Combination pliers	1
1802M-22	Diagonal cutter	1

HAZET No.	Contents	
1979-74	Flash light	1
1987N-4	Gloves	1
2154-200	Folding rule	1
2154-40	Spirit level, length: 400 mm	1
1981	Metal saw frame	1
2105LG/9H	Offset screwdriver set, 9 pieces	9
760-18	Universal pliers	1

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.



Magnetic fastener:
The smart solution for effortless opening and closing



Separate inner compartment:
For notebook or tablet



Ready to hand:
Practical compartment for a water bottle



Optimum protection:
Hard-shell compartment for mobile phone or keys













NEW!

Tool rucksack, empty

191R-1
EAN-No. 4000896276820

Tool rucksack with 89 expert tools





89

NEW!

191R-1/89
EAN-No. 4000896279609

HAZET No.	Contents	
191R-1	Tool rucksack	1
9530-1/4	Cordless drill set, 4 pieces · 1 quick charger · 2x rechargeable batteries 18-volt, 2.5 Ah	4
2200SC-32	SmartCase socket set, 59 pieces	59
839P	Phase tester	1
811/6	Screwdriver set, 6 pieces	6
2140N-30	Machinist's hammer, length: 300 mm	1
1850M-22	Combination pliers	1

HAZET No.	Contents	
1802M-22	Diagonal cutter	1
1979-74	Flash light	1
1987N-4	Gloves	1
2154-200	Folding rule	1
2154-40	Spirit level, length: 400 mm	1
1981	Metal saw frame	1
760-18	Universal pliers	1

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

1/4" · 1/2" SmartRail



SmartRail, empty

Made in Germany

No.	HAZET No.	■	Number of slots	EAN-No. 4000896 +	
①	850SR-7	1/4"	7	249626	
②	900SR-5	1/2"	5	244508	
③	900SR-8	1/2"	8	244515	



1/4" Hexagon, long 50 mm


6.3 1/4" · 7

- *s* 5.5 · 6 · 7 · 8 · 10 · 12 · 13 mm

Made in Germany

850LG-SR/7

EAN-No. 4000896250691



1/2" Impact socket set

12.5 1/2" · 5

- Plastic sleeve to protect the rim
- *s* 17 mm (3x) · 19 mm (2x)

Made in Germany

903SLG-SR/5

EAN-No. 4000896245253



1/2" Serration, short


12.5 1/2" · 8

- *s* M5 · M6 · M8 · M10 · M12 · M14 · M16 · M18

Made in Germany

990-SR/8

EAN-No. 4000896245352

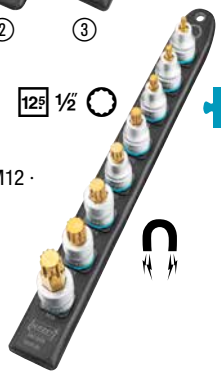

1/4" SmartHolder


6.3 1/4" · 6.3 1/4" · 6.3 1/4" · 6.3 1/4"

1/4" SmartHolder with 39 screwdriver bits, long 50 mm and short 25 mm

- 18 screwdriver bits short, 25 mm:
  - *s* 0.6 x 4.5 mm
  - PH1 · PH2 · PH3
  - PZ1 · PZ2 · PZ3
  - *s* 3 · 4 · 5 · 6 · 8 mm
  - T10 · T15 · T20 · T25 · T30 · T40
- 11 screwdriver bits long, 50 mm:
  - *s* 0.8 x 5.5 mm
  - PH2
  - PZ1 · PZ2
  - *s* 3 · 4 · 5 · 6 mm
  - T20 · T25 · T30
- 6 sockets, hexagon:
  - *s* 5.5 · 7 · 8 · 10 · 12 · 13 mm
- Mini solid steel fine-tooth reversible ratchet
- Bit holder with magnet
- Adapter ⬢ 6.3 = 1/4" → ■ 6.3 = 1/4"
- Adapter 6.3 1/4" 6.3 1/4"

reddot winner 2023



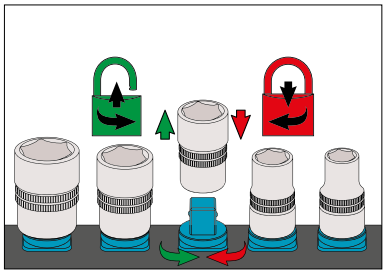

39

2300SH-1

EAN-No. 4000896246588


1/4" SmartHolder with 16 screwdriver bits, short 25 mm

6.3 1/4" · 16

- *s* 0.5 x 4 · 1.2 x 6.5 mm
- PH1 · PH 2 · PH3
- *s* 3 · 4 · 5 · 6 mm
- T10 · T15 · T20 · T25 · T27 · T30 · T40

2304SH-1

EAN-No. 4000896250677



6.3 1/4" · 16

- *s* 0.4 x 1.5 · 0.5 x 4 · 1.2 x 6.5 mm
- PZ1 · PZ 2 · PZ3
- *s* 3 · 4 · 5 · 6 mm
- T10 · T15 · T20 · T25 · T30 · T40

2304SH-2

EAN-No. 4000896250653



6.3 1/4" · 16

- T6 · T7 · T8 · T9 · T10 · T15 · T20 · T25 · T27 · T30 · T40
- T10H · T15H · T20H · T25H · T30H

2304SH-3

EAN-No. 4000896250639



1/4" SmartHolder with 8 screwdriver bits, long 50 mm

6.3 1/4" · 8

- PH1 · PH 2
- *s* 3 · 4 · 5 mm
- T15 · T20 · T25

2304SH-11

EAN-No. 4000896250615



6.3 1/4" · 8

- 0.8 x 5.5 mm
- PZ1 · PZ2
- *s* 4 · 5 · 6 mm
- T20 · T25

2304SH-12

EAN-No. 4000896250592



6.3 1/4" · 8

- T10 · T15 · T25 · T27 · T30 · T40
- T20 (2x)

2304SH-13

EAN-No. 4000896250578



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

1/4" SmartCase

69

1/4" Screwdriver bit and offset screwdriver set

EJECT!



Quick bit change with just one hand

Assortment



2200SC-1
EAN-No. 4000896239252

50


1/4" Socket and screwdriver bit set



863HPB
Incl. bit ejector – facilitates bit removal



Assortment



2200SC-2
EAN-No. 4000896239603

96

1/4" Screwdriver bit set



Assortment



2200SC-3
EAN-No. 4000896244522

73

1/4" Screwdriver bit and offset screwdriver set, TORX® inside hexagon

EJECT!


Quick bit change with just one hand





863HPB
Incl. bit ejector – facilitates bit removal

Assortment

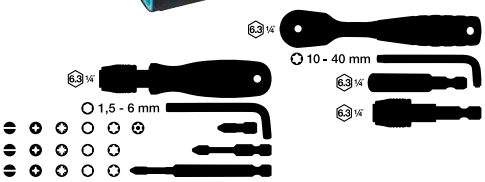

2200SC-31
EAN-No. 4000896244539

59

1/4" Socket and screwdriver bit set


EJECT!


Quick bit change with just one hand





863HPB
Incl. bit ejector – facilitates bit removal





Assortment

2200SC-32
EAN-No. 4000896244546

SMART

1/4" Ratcheting bit screwdriver with built-in magazine

FACELIFT!



Incl. extension (80 mm) 810 R-2



EJECT!

Quick bit change with just one hand

Ratchet with free-running function

Set includes 12 screwdriver bits

14

	0.5 x 4.0 · 1.2 x 6.5 mm
	PH1 · PH2
	PZ1 · PZ2
	s 4 · 5 · 6 mm
	T15 · T20 · T25

811R-3
EAN-No. 4000896270569

Set includes 12 screwdriver bits

14

	0.8 x 5.5 mm
	PH2 · PH3
	s 3 · 4 · 5 · 6 mm
	T15 · T20 · T25 · T27 · T30

811R-4
EAN-No. 4000896270583

1/4" Cordless screwdriver

NEW!

- Torque range max: 5 Nm
- 3 torque levels via selector switch
- LED light with persistence afterglow
- Magnetic holder fixes the tool in place
- USB-C charging port with rubber cover (incl. USB-A / USB-C charging cable)
- L x W x H: 180 x 35 x 35 mm



Slim, handy – fits into work clothes (folding rule pocket)

9230B-2
EAN-No. 4000896269266

Multitool 13-in-1

- Universal tool with 13 practical functions
- Material made of high-quality stainless steel
- Ergonomically shaped handle with rounded finger rest
- With a practical belt clip
- Including sturdy belt bag

13 practical functions:
- Snipe nose pliers, combination pliers
- Diagonal cutter, knife
- Scissors, multi-purpose cutter
- Bottle opener with flat screwdriver, *s* 5 x 0.1 mm
- Can opener with flat screwdriver, *s* 3 x 0.1 mm
- Phillips-Recess screwdriver, PH2
- Mandrel, file, saw
- Hex wrenches *s* 7, 8, 10, 14 mm



2159-1
EAN-No. 4000896269549

1/4" Screwdriver bit set

36



EJECT!

Quick bit change with just one hand



	Bit adapter
	s 0.6 x 4.5 · 0.8 x 5.5 · 1 x 6 mm
	PH 1 (3x) · PH 2 (3x) · PH 3
	PZ 1 (3x) · PZ 2 (3x) · PZ 3
	s 3 · 4 · 5 · 6 mm
	T10 · T15 (2x) · T20 (2x) · T25 (2x) · T27 · T30 (2x) · T40 (2x)
	T20H · T30H

2240N/36
EAN-No. 4000896187614

1/4" Screwdriver bit set

51



EJECT!

Quick bit change with just one hand



	Bit adapter
	s 0.5 x 4 · 0.6 x 4.5 · 0.8 x 5.5 · 1 x 6 mm
	PH1 (4x) · PH2 (4x) · PH3 (2x)
	PZ1 (3x) · PZ2 (3x) · PZ3
	s 2 · 2.5 · 3 · 4 · 5 · 6 mm
	T6 · T7 · T8 · T9 · T10 · T15 (2x) · T20 (2x) · T25 (2x) · T27 (2x) · T30 (2x) · T40 (2x)
	T10H · T15H · T20H · T25H · T27H · T30H

2240N/51
EAN-No. 4000896187607

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Slot / Phillips set



811/6
EAN-No. 4000896258383



4 x		0.5x3.0 · 0.8x4.0 · 1.0x5.5 · 1.2x6.5 mm
2 x		PH 1 · PH 2

TORX® set



811T/6
EAN-No. 4000896258406



6 x		T10 · T15 · T20 · T25 · T27 · T30

Set with impact cap



811S/5
EAN-No. 4000896258420



3 x		0.8x4.5 · 1.0x5.5 · 1.2x7 mm
2 x		PH 1 · PH 2

Slot / Phillips set with holder

- Practical holder with keyhole for wall mounting



811SH-1/7
EAN-No. 4000896264605

4 x		0.5x3.0 · 0.8x4.0 · 1.0x5.5 · 1.2x6.5 mm
2 x		PH1 · PH2

Electronic screwdriver set, TORX®



811EL-T/7
EAN-No. 4000896259922



7 x		T5 · T6 · T7 · T8 · T9 · T10 · T15

Electronic screwdriver set



811EL/7
EAN-No. 4000896259908



4 x		0.23x1.5 · 0.4x2 · 0.4x2.5 · 0.5x3 mm
3 x		PH00 · PH1 · PH2

High-voltage screwdriver set for electricians, with protective insulation

- Non-slip HAZET 3-component handle, allows high power transmission, with hanging hole
- Phase tester (839P), 220 – 250 V according to DIN VDE 0680-6

Contents:
– 811KV-PH1, -PH2
– 811KV-25, -35, -40
– 839P



811KV/6
EAN-No. 4000896268146


Offset screwdriver set

- Extra long design
- Plastic clip
- Surface: nickel-plated

Contents:
– *s* 1.5 · 2 · 2.5 · 3 · 4 · 5 · 6 · 8 · 10 mm



With ball-head



Made in Germany


2105LG/9H
EAN-No. 4000896012015

3/4" Reversible ratchet, extendable

- Continuously adjustable from 730 to 1130 mm (without pre-fixed detent points)
- **Torque max: 1800 Nm**
- Long lever arm for powerful work and more torque with less effort
- Safe working without extension tube
- Easy fixation with knurled clamping nut
- Twist protected handle ensures optimum force transmission without slipping
- HAZET 2-component handle for improved grip and secure hold
- Extendable: 400 mm
- Number of teeth: 32
- Operating angle: 11.25°
- For manual operation
- Surface: chrome-plated
- Ratchet standard: DIN 3122 / ISO 3315

20 3/4"

NEW!

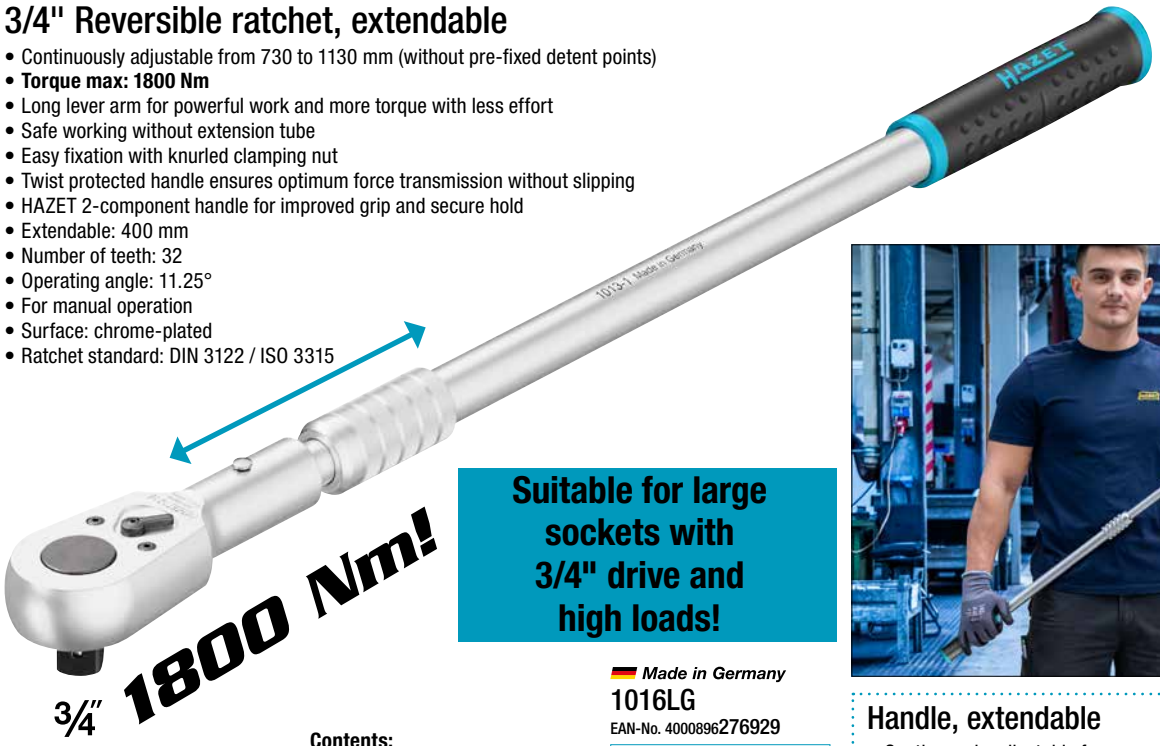


3/4" 1800 Nm!

Suitable for large sockets with 3/4" drive and high loads!



Made in Germany
1016LG
EAN-No. 4000896276929


Contents:
– Handle, extendable 1013-1
– Reversible ratchet head 1016

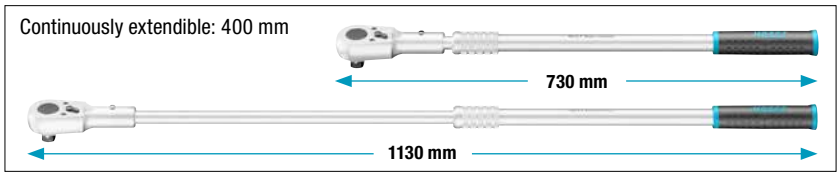

Handle, extendable

- Continuously adjustable from 610 to 1010 mm (without pre-fixed detent points)
- For 3/4" reversible ratchet head 1016

NEW!

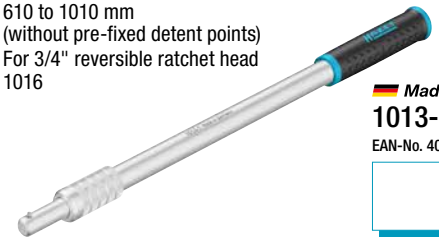

Made in Germany
1013-1
EAN-No. 4000896273546

HiPer fine-tooth reversible ratchets

- Developed and produced "Made in Germany"
- High permanent load for durability
- 90 teeth, 4° fine toothed for confined spaces
- Locking function of the lever prevents unwanted switching
- A lot more performance with the same dimensions
- Strict production tolerances prevent dirt from getting in


863HPB




HiPer series

DIN/HiPer performance comparison using the example of 916 HP

Peak load
DIN 3122:2017-04
(static load)

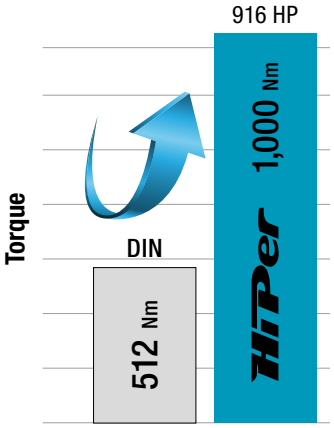

Durability | Permanent load
ISO 3315:2018-05
(dynamic load)

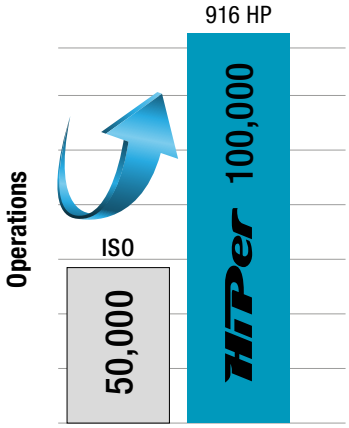

HiPer
HIGH PERFORMANCE
THE ORIGINAL
MADE IN GERMANY

Static AND dynamic – double precision in perfection!


HAZET No.	■	Nm max	Length mm	EAN-No. 4000896 +	
Our classics!					
① **863HPB**	6.3 1/4	120	116	235346	
② **863HP**	6.3 1/4"	120	116	226917	
③ **8816HP**	10 3/8"	400	200	235063	
④ **916HP**	12.5 1/2"	1.000	275	213894	
⑤ **916HPL**	12.5 1/2"	1.000	415	219209	
⑥ **916HPLG**	12.5 1/2"	1.000	414 – 614	233076	
Short design!					
⑦ **916HPK**	12.5 1/2"	400	200	244379	
With safety locking!					
⑧ **863HPS**	6.3 1/4"	100	116	237234	
⑨ **8816HPS**	10 3/8"	340	200	237241	
⑩ **916HPS**	12.5 1/2"	850	275	237258	


Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Grip pliers wrenches

- Compact and at the same time highly resilient
- In four different lengths: 125 · 150 · 180 · 260 mm
- Convenient – thanks to quick adjustment with proven HAZET tip/step lever function
- One-hand presetting possible
- Permanent laser-marked scaling for easy setting and reading
- High corrosion resistance due to chrome-plated, easy-to-clean pliers legs
- Heavy-duty pliers legs made of case-hardened chrome vanadium steel
- Comfortable grip thanks to double dip coating – lies well in the hand
- Fine detent distance enables any wrench size in the clamping range

Production

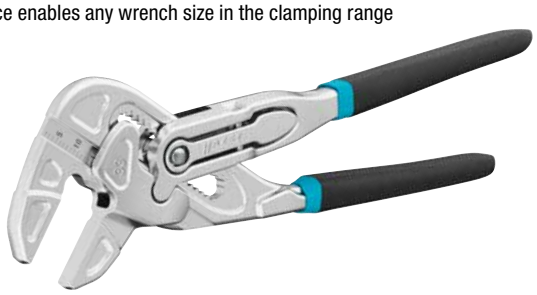






Made in Germany

HAZET No.	Length mm	Detent distance mm	Number of detent positions	Clamping range mm		EAN-No. 4000896 +	
762-12	125	2	12	⬢ 26	□ 26	249800	
762-15	150	2	15	⬢ 33	□ 33	249640	
762-18	180	2	19	⬢ 42	□ 42	249787	
762-26	260	2.5	20	⬢ 56	□ 56	249664	

Protective jaws

- Contents: 3 pairs

6





Made in Germany


762-018/6	Protective jaws for grip pliers wrench 762-18	259861	
762-026/6	Protective jaws for grip pliers wrench 762-26	259885	

Universal pliers

- Compact and at the same time highly resilient
- In four different lengths: 125 · 150 · 180 · 260 mm
- Convenient – thanks to quick adjustment with proven HAZET tip/step lever function
- Long service life due to extremely hard jaw serration
- More force thanks to teeth offset against the direction of rotation
- Precise latching with the aid of laser-cut serration
- Heavy-duty pliers legs made of case-hardened chrome vanadium steel
- Phosphatised surface
- Pleasant to grip thanks to double dip coating – lies well in the hand
- Fine detent distance enables any wrench size in the clamping range

Production






Tube


6-point


Square


Nail and wire-holder function


Flat material

Made in Germany

HAZET No.	Length mm	Detent distance mm	Number of detent positions	Clamping range mm		EAN-No. 4000896 +	
760-12	125	2	13	⬢ 27	○ 32	249749	
760-15	150	2	14	⬢ 34	○ 38	249688	
760-18	180	2	17	⬢ 36	○ 42	249763	
760-26	260	2.5	17	⬢ 50	○ 52	249701	



Set of grip pliers wrenches

3

- **Contents**
  - 762-12
  - 762-18
  - 762-26



Made in Germany

762/3

EAN-No. 4000896269105

Set of grip pliers wrenches and universal pliers

2

- **Contents**
  - 760-12
  - 762-12



Made in Germany

760/2

EAN-No. 4000896269068

Universal pliers set

3

- **Contents**
  - 760-12
  - 760-18
  - 760-26



Made in Germany

760/3

EAN-No. 4000896269082

1/4" Solid steel fine-tooth reversible ratchet for screwdriver bits

6.3 1/4"

- 90 mm short design
- 60 teeth, 6° operating angle
- With locking spring to securely hold the screwdriver bits

60 ⧖6°



Made in Germany

863MB

EAN-No. 4000896212187

1/4" • 3/8" • 1/2" • 3/4" Adapter set

12.5 1/2" 20 3/4" 10 3/8" 6.3 1/4" 6.3 1/4" — 7

- For manual operation



Made in Germany

958/7

EAN-No. 4000896204595

Ratcheting combination wrench set

5

- Ratchet function with one-hand reversing switch
- Fine-tooth, 72 teeth, operating angle 5° (*s* 8 mm: 60 teeth, operating angle 6°) 13°
- Surface: chrome-plated



s 8 · 10 · 13 · 17 · 19 mm

606/5

EAN-No. 4000896177998

1/4" • 3/8" • 1/2" Adapter set

4

- For ratcheting combination wrenches

Contents:

– 3 ratcheting combination wrench adapters with retaining knob:
10 mm ⬢ to 6.3 1/4" · 13 mm ⬢ to 10 3/8" · 19 mm ⬢ to 12.5 1/2"

– 1 screwdriver bit adapter: 10 mm ⬢ to 6.3 1/4"





606/4SPC

EAN-No. 4000896127399

Combination wrench set

10

- Up to 70% above DIN
- Slim heads
- Box-end head angled at 15°
- Surface: chrome-plated, head polished



s 8 · 10 · 12 · 13 · 14 · 15 · 16 · 17 · 18 · 19 mm

Made in Germany

600SPC/10

EAN-No. 4000896118465

16



s 7 · 8 · 9 · 10 · 11 · 12 · 13 · 14 · 15 · 16 · 17 · 18 · 19 · 21 · 22 · 24 mm

Made in Germany

600SPC/16

EAN-No. 4000896186235

Quick-clamping puller set

5

- 5-piece set in display stand

Contents:

– 1750-9 · 1750-11 · 1750-14 · 1750-19 · 1750-26




1750/5

EAN-No. 4000896251476

Quick-clamping puller

- Solid all-steel bridge
- Forged arms

HAZET No.	*sb* mm	*st* mm	EAN-No. 4000896+	
1750-9	100	80	249923	
1750-11	135	80	249947	
1750-14	135	137	249961	
1750-19	185	160	249985	
1750-26	260	220	250028	
1750-34	345	260	250042	
1750-44	440	260	250134	

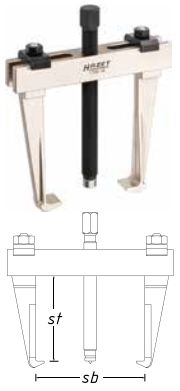

Universal ball joint puller

- Removing the ball joint pivot from e.g. steering arms, steering tie rods, stabilizers
- Jaw opening: 23 mm
- Clamping range: 65 mm
- For the most common vehicles
- Large clamping range due to continuous vertical adjustment and turning of the lower part



1779-1

EAN-No. 4000896135974

Universal ball joint puller

- Removing the ball joint pivot from e.g. steering tie rods, stabilizers
- For **FORD** · **BMW** · **Volvo** · **TOYOTA** · **OPEL/VAUXHALL** · **VW** · **AUDI** · **RENAULT**
- Jaw opening: 20 mm
- Clamping range: 2-stage
  – Level 1: up to 30 mm
  – Level 2: up to 50 mm

Made in Germany

1790-7

EAN-No. 4000896148073



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Beam puller

- Tensioning, pulling, pressing of timbers
- Drop forged, tempered hooks
- **Beam puller**
- Smooth operation of trapezoidal thread TR 16 x 5
- Ergonomic design – with reversible ratchet
- Span: 115 mm
- Overall width: 440 mm
- Ratchet length: 275 mm
- 2 puller hooks



Our classic!



Made in Germany

1774-1


EAN-No. 4000896180578

Beam/plate puller

- The use of wood screws results in only minor processing marks
- Suitable for wood types with increased risk of cracking and splitting
- Tensioning, pulling, pressing of timbers
- Suitable for hard-to-reach areas
- Simple and ergonomic handling thanks to reversible ratchet
- Smooth operation of trapezoidal thread TR 16 x 5
- 6 boreholes each 8.5 mm ∅ per aluminium plate
- Span: 115 mm
- Overall width: 581 mm
- Total height: 280 mm
- Aluminium plate size: 150 x 75 mm
- Number of aluminium plates: 2



Avoids the risk of cracks and splits!

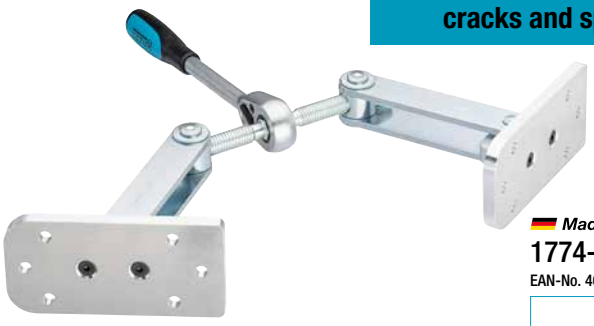

Made in Germany

1774-2

EAN-No. 4000896264445

Torque tools

Torque screwdriver for bits

- "Ratchet function" with free-running mechanism, featuring right · left · fixed switching · enables fast work thanks to smooth re-gripping when operating screw connections, even in confined installation spaces
- Excellent readability of the torque setting thanks to large, clear numerical display
- Short 36° release distance with ergonomic release behaviour and clearly audible signal
- Accuracy ± 6 % of scale value (in direction of actuation for right-hand tightening)

reddot winner 2025

DESIGN AWARD 2025

EISENaward 2024

WINNER

6.3 ¼"



SYSTEM 6004CT with standard handle



NEW SIZE!

Made in Germany

HAZET No.	Nm range	Release accuracy tolerance ± %	EAN-No. 4000896 +	
6004CT-3	2 – 30 cNm (≙ 0.02 – 0.3 Nm)	6	260027	
6004CT-12	0.2 – 1.2 Nm	6	260041	
6004CT-60	1 – 6 Nm	6	277247	

SYSTEM 6005CT with sliding T-handle for high torques

- Better power transmission thanks to ergonomic T-handle


Made in Germany

HAZET No.	Nm range	Release accuracy tolerance ± %	EAN-No. 4000896 +	
6005CT-60	1 – 6 Nm	6	260065	
6005CT-100	4 – 10 Nm	6	260089	



SYSTEM 5000-3CT

Made in Germany

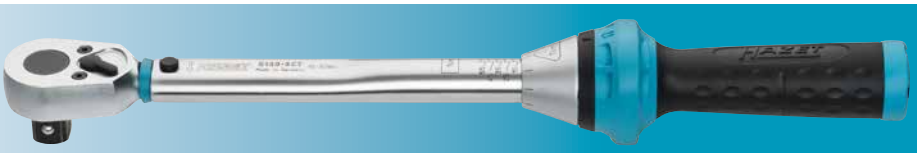

OUR WORKSHOP CLASSICS!

- **Series with large measuring range: 1 – 800 Nm**
- **17 versions with 1/4" · 3/8" · 1/2" · 3/4" reversible ratchet and reversible ratchet for screwdriver bits or insert square 9 x 12 · 14 x 18 mm**
- Accuracy ± 3 % of the scale value (5107 ± 4 %) in direction of actuation
- Tested in accordance with DIN EN ISO 6789-2:2017 with calibration certificate and serial number
- HAZET's own Service Centre for the best aftersales service
- Developed and produced by HAZET "Made in Germany"

DESIGN AWARD 2021



6.3 1/4" 10 3/8" 12.5 1/2" 20 3/4"

Setting instructions

With reversible ratchet!

Made in Germany

HAZET No.	Output	Nm range	Release accuracy tolerance ± %	Length mm	EAN-No. 4000896 +	
5107-3CT	6.3 1/4"	1 – 9	4	234	218875	
5108-3CT	6.3 1/4"	2.5 – 25	3	234	218882	
5110-3CT	10 3/8"	10 – 60	3	320	218899	
5111-3CT	10 3/8"	20 – 120	3	375	235384	
5120-3CT	12.5 1/2"	10 – 60	3	320	218905	
5121-3CT	12.5 1/2"	20 – 120	3	421	218912	
5122-3CT	12.5 1/2"	40 – 200	3	519	219001	
5123-3CT	12.5 1/2"	60 – 320	3	628	218998	
5143-3CT	12.5 1/2"	100 – 400	3	790	235407	
5145-3CT	20 3/4"	300 – 800	3	1271	218929	



No more turning back!



With 1/4" reversible ratchet for screwdriver bits!

Made in Germany

HAZET No.	Output	Nm range	Release accuracy tolerance ± %	Length mm	EAN-No. 4000896 +	
5107B-3CT	6.3 1/4"	1 – 9	4	234	244584	
5108B-3CT	6.3 1/4"	2.5 – 25	3	234	244591	





6.3 1/4"

With plug connection!

Made in Germany

HAZET No.	Output mm	Nm range	Release accuracy tolerance ± %	Length mm	EAN-No. 4000896 +	
5280-3CT	9 x 12	2.5 – 25	3	218	239290	
5290-3CT	9 x 12	10 – 60	3	291	228904	
5291-3CT	14 x 18	20 – 120	3	385	277209	
5292-3CT	14 x 18	40 – 200	3	484	228911	
5293-3CT	14 x 18	60 – 320	3	594	277223	

NEW SIZES!

Suitable insert tools

Effective length calculator

Effective length calculation

9 x 12 14 x 18



3/8" Insert tool set

• *s* 10 · 13 · 14 · 15 · 17 · 19 mm

9 x 12 10 3/8" 7



Made in Germany

6450C/7

EAN-No. 4000896231102

1/2" Insert tool set

• *s* 16 · 17 · 18 · 19 · 22 · 24 mm

14 x 18 12.5 1/2" 7



Made in Germany

6450D/7

EAN-No. 4000896231119

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.



Our quality makes the difference:

Reliable performance and long service life!

Flexible contacts ① help to prevent battery wear and extend their service life.

Anti-vibration pads ② and a latching bracket on the head side of the battery ③ minimise vibration and thus increase the service life of the batteries and devices. (No "deflection" of the battery > "wobbling effect")

TOTALLY INSPIRING!

HAZET RECHARGEABLE BATTERY SYSTEM – COMPATIBLE WITH ALL DEVICES OF THE NEW SYSTEM 9500

Battery pack Li-ion, 18 V

- Compatible with all devices of the 9500 series

2.5 Ah

- 18 V Li-ion battery pack 2.5 Ah
- Dimensions L x W x H: 120 x 75 x 50 mm
- Weight: 0.42 kg



9500-025
EAN-No. 4000896265138

5 Ah

- 18 V Li-ion battery pack 5 Ah
- Dimensions: L x W x H: 120 x 75 x 70 mm
- Weight: 0.74 kg



9500-05
EAN-No. 4000896266166

Quick charger for 18 V rechargeable batteries

- Reaches 80% of the charging capacity after about 30 minutes thanks to a special charging process



9501-1018
EAN-No. 4000896265114

Battery starter set

3

- For charging the 18 V battery pack

Contents

– 2x Li-ion battery pack 9500-05 (5 Ah, 18 V)
– Quick charger 9501-1018



9500-05/3
EAN-No. 4000896265251

Holder for RECHARGEABLE BATTERY SYSTEM 9500

- For HAZET tool trolleys "Assistent" 167-3S · 176N · 178N · 179N · 179NX · 179NXL · 179NXXL · 179NXXL-8D and work bench "Assistent" 177W, 179NW and 179NWL
- Individual attachment to HAZET perforated tool boards with square perforation

Holder for cordless tools

- Holds up to three cordless tools
- L x W x H: 334 x 220 x 152 mm





Made in Germany
179N-55
EAN-No. 4000896269839

Holder for 2 battery packs

- For 2 battery packs 9500-025, 9500-05
- L x W x H: 180 x 15 x 100 mm





Made in Germany
179N-56
EAN-No. 4000896269815

Holder for HAZET battery charger

- For battery charger 9501-1018
- Cable protection
- L x W x H: 209 x 86 x 174 mm





Made in Germany
179N-57
EAN-No. 4000896269792

1/2" Cordless impact wrench set, 18 V

12.5 1/2" 4

18V

Contents
– Cordless impact wrench 9512-600
– 2x Li-ion battery pack 9500-05 (5 Ah, 18 V)
– Quick charger 9500-18





5 Ah

1/2"



600 Nm

9512-600/4
EAN-No. 4000896265176

Cordless impact wrench 9512-600
- Max. loosening torque: 600 Nm
- Revolutions per minute: 2700
- Weight (without battery): 1.17 kg

1/2" Cordless impact wrench set, 18 V

12.5 1/2" 4

18V

Contents:
– Cordless impact wrench 9512-950
– 2x Li-ion battery pack 9500-05 (5 Ah, 18 V)
– Quick charger 9500-18





5 Ah

1/2"



950 Nm

9512-950/4
EAN-No. 4000896272716

Cordless impact wrench 9512-950
- Max. loosening torque: 950 Nm
- Revolutions per minute: 2450
- Weight (without battery): 1.9 kg

3/4" Cordless impact wrench set, cordless work light, 18 V

NEW!

20 3/4" 5

18V

Contents:
– Cordless impact wrench 9513-2100
– 2x Li-ion battery pack 9500-05 (5 Ah, 18 V)
– Quick charger 9501-1018
– Cordless work light 9579-10



5 Ah

9500P-3/3
EAN-No. 4000896279883



Free!

Cordless work light 9579-10
- LED light head can be swivelled 180° and 270°
- High-performance LED cordless light with 8 light emitting diodes
- 3 brightness levels: 200 · 500 · 1000 lm

3/4"



2100 Nm

Cordless impact wrench 9513-2100
- Max. loosening torque: 2100 Nm
- Revolutions per minute: 1900
- Weight (without battery): 3.1 kg

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Cordless drill set, 18 V

4

18V

Contents
– Cordless drill 9530-10
– 2x Li-ion battery pack 9500-025 (2.5 Ah, 18 V)
– Quick charger 9500-18





2,5 Ah



9530-1/4
EAN-No. 4000896265213

Cordless drill 9530-10
- Number of torque levels: 18 + 1
- Drill diameter: 1.5–13 mm
- Weight (without battery): 1.14 kg

Cordless drill, 1/2" cordless impact wrench, cordless right-angle grinder set, 18 V

12.5 1/2" 6

18V

Contents
– Cordless drill 9530-10
– Cordless impact wrench 9512-950
– Cordless right-angle grinder 9533-10
– 2x Li-ion battery pack 9500-05 (5 Ah, 18 V)
– Quick charger 9501-1018





1/2"







5 Ah

9500P-1/6
EAN-No. 4000896265190

Hybrid cordless radio, cordless dry vacuum cleaner, cordless work light, 18 V

3

18V

Contents
– Professional hybrid cordless DAB radio 9580-10
– Cordless dry vacuum cleaner 9543-10
– Cordless work light 9579-10







18V 230V


9500P-2/3
EAN-No. 4000896265152

Auto stop function stops the machine as soon as the striking mechanism starts or stops working when it is released: avoids overtightening or loss of screws and nuts during operation!

1/2" Cordless impact wrench, compact, 18 V
Max. loosening torque: 600 Nm

- Short head length ensure ideal working in tight installation spaces
- Prevents overtightening of small screws, for example, thanks to the option of setting in three different speed ranges ("Speed Command")
- Forward / reverse with switch-on lock
- Max. tightening torque: 406 Nm
- Max. loosening torque: 600 Nm
- Idle speed: Level 1: 0 - 1000 rpm, level 2: 0 - 1800 rpm, level 3: 0 - 2700 rpm.
- Idle stroke rate: 0-3750 rpm.
- Electronic emergency brake
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series
- Weight (without battery): 1.2 kg

Wood function: Significantly increases performance when driving screws into wood.



①	Selection button for levels 1 - 3
②	Status lights: Levels 1 - 3
③	Indicator lights: Auto stop function
④	Indicator light: Wood function
⑤	Selection button for auto stop or wood function



18V

12.5 1/2"

600 Nm

Without rechargeable battery and charger

9512-600


EAN-No. 4000896265053

1/2" Cordless impact wrench, 18 V
Max. loosening torque: 950 Nm

- Powerful impact mechanism for maximum performance enables the operation of stuck, e.g. rusted screw connections, even in extreme applications
- LED light with persistence afterglow
- Prevents overtightening of small screws, for example, thanks to the option of setting in three different speed ranges ("Speed Command")
- Forward / reverse with switch-on lock
- Tightening torque: level 1 (maximum): 150 Nm, level 2 (maximum): 200 Nm, level 3: maximum: 750 Nm
- Loosening torque maximum: 950 Nm
- Idle speed: Level 1: 0 - 1000 rpm, level 2: 0 - 2000 rpm, level 3: 0 - 2450 rpm.
- Electronic emergency brake
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series
- Weight (without battery): 1.9 kg



Patented vibration damping protects the wrist and the battery locking element



①	Selection button for levels 1 - 3
②	Status lights: levels 1 - 3
③	Indicator light: Auto stop function
④	Selection button for auto stop function



18V

12.5 1/2"

950 Nm

Without rechargeable battery and charger

9512-950


EAN-No. 4000896265039

3/4" Cordless impact wrench, 18 V
Max. loosening torque: 2100 Nm

- Prevents overtightening of small screws, for example, thanks to the option of setting in three different speed ranges ("Speed Command")
- Forward / reverse with switch-on lock
- Infinite speed regulation
- 3 tightening torque levels
- Idle speed · level 1: maximum: 500 rpm, level 2 (maximum): 1000 rpm, level 3 (maximum): 1900 rpm.
- Max. loosening torque: 2100 Nm
- Idle stroke rate: 0-2350 rpm.
- Electronic emergency brake
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series
- Weight (without battery): 3.1 kg



Patented vibration damping protects the wrist and the battery locking element



①	Selection button for levels 1 - 3
②	Status lights: levels 1 - 3
③	Indicator light: Auto stop function
④	Selection button for auto stop function



18V

20 3/4"

2100 Nm

Without rechargeable battery and charger

9513-2100

EAN-No. 4000896265015

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Cordless drill, 18 V

- Quick-action drill chuck, metal version with auto-lock function
- Electronic emergency brake
- Forward/reverse with switch-on lock
- LED light with persistence afterglow
- Number of torque levels: 18 + 1
- Tightening torque (hard) maximum: 65 Nm
- Drill diameter: 1.5–13 mm
- Idle speed: Level 1: 0 - 500 rpm, level 2: 0 - 1800 rpm.
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series



Without rechargeable battery and charger

9530-10

EAN-No. 4000896266142

Cordless impact drill, 18 V

- Quick-action drill chuck, metal version with auto-lock function
- Electronic emergency brake
- LED light with persistence afterglow
- Forward/reverse with switch-on lock
- Number of torque levels: 23 levels
- Tightening torque (hard) maximum: 158 Nm
- Maximum drill diameter: Wood: 89 mm, Steel: 13 mm
- Idle speed: Level 1: 0 - 700 rpm, level 2: 0 - 2500 rpm.
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series
- Anti-kickback switches off the motor when screw connections and drill holes are blocked, preventing the wrist from twisting
- Turbo mode for faster and more powerful work. Switching on the turbo boost achieves up to 27 % higher speed



Without rechargeable battery and charger

9530-11

EAN-No. 4000896272730

With impact function!

Cordless right-angle grinder, Ø 125 mm, 18 V

- Soft start thanks to microprocessor electronics
- Restart interlock after power failure
- Temperature control
- Anti-kickback – device stops if the speed drops sharply due to canting
- Angled side handle offers ergonomic arm working position
- Spindle lock
- Spindle thread: M14
- Disc diameter: 125 mm
- Revolutions per minute: 10,000
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series





Incl. protective cover for separating cuts

Without rechargeable battery and charger

9533-10

EAN-No. 4000896265091

Accessories

HAZET No.	Spare parts		EAN-No. 4000896+	
9233-010/5	Cut-off wheel set (125x1x22.23 mm)	5	219063	
9233-010/25	Cut-off wheel set (125x1x22.23 mm)	25	219070	
9233-011/10	Rough grinding wheel set (125x6x22.23 mm)	10	219087	



Cordless reciprocating saw, long stroke, 18 V

- Compact, powerful device with large stroke (25 mm)
- Tool-free quick-change saw blade system with ejection function ensures contact-free saw blade changes
- Saw blade: 180° reversible
- Idle stroke rate: 0 – 3000 rpm.
- Maximum material thickness:
  - Wood: 210 mm
  - Aluminium: 30 mm
  - Metal tube: 110 mm
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series
- Weight (without battery): 1.9 kg



Without rechargeable battery and charger

9534-10

EAN-No. 4000896265077

Accessories

HAZET No.	5 flexible reciprocating saw blades each	Length of serration mm	EAN-No. 4000896+	
9234M-150/5	For steel and non-ferrous metal from 2 – 8 mm	130	239382	
9234P-150/5	For wood with nails and faster sawing progress in metal 2 – 10 mm	130	239405	
9234P-225/5	For wood with nails and faster sawing progress in metal 2 – 10 mm	205	239412	
9234X-150/5	For steel and stainless steel (Inox) from 1.5 – 4 mm	130	239597	
9234W-225/5	For all wood types, plastics as well as plasterboard 6 – 100 mm	205	239429	
9034P-R/5	Reciprocating sabre saw blades	132	218318	



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Hybrid fan, 18 V and 230 V

- Infinite air volume regulation
- Soft start
- Operation with 18 V battery or via 230 V power supply unit
- Running time at maximum speed: approx. 2.2 hours with battery pack 2.5 Ah and approx. 4.5 hours with battery pack 5 Ah
- Compatible with all 18 V battery packs in the 9500 series



Incl. 230 volt mains adapter (ready for immediate use)
Without battery and charger

9544-10
EAN-No. 4000896264995

18V 230V

Hybrid function 18 V or 230 V

Professional hybrid cordless DAB radio with Bluetooth, 18 V and 230 V

- Robust radio for DAB+ and FM reception
- Speaker output 2 x 10 W and bass boost for top sound quality
- Illuminated LCD display · Coloured LED light strip · Digital clock · Retractable, flexible antenna
- Bluetooth® · Aux input · USB port · Charging option for smartphones, tablets
- Mute function
- Protection rating: IP64
- Compatible with all 18 V battery packs in the 9500 series



Incl. 230 volt mains adapter (ready for immediate use)
Without battery and charger

9580-10
EAN-No. 4000896264971

18V 230V

Cordless heat gun, 18 V

- Hot air blower with 2 temperature settings 260°/530° C and 2 air flow settings
- Heating (air flow) up to 300° C in ~ 15 seconds
- LED light for lighting up the work area perfectly
- Lockable on / off switch
- Compact, ergonomic design
- Maximum air flow rate: 200 lm
- Temperature levels: 2
- Air flow: 130 · 200 l/min
- Compatible with all 18 V battery packs in the 9500 series



Including flat, reflector and reducing nozzle for numerous applications

Without rechargeable battery and charger

9590-10
EAN-No. 4000896265299

18V

Cordless work light, 1000 lm, 18 V

- LED light head can be swivelled 180° and 270°
- High-performance LED cordless light with 8 light emitting diodes
- 3 brightness levels: 200 · 500 · 1000 lm
- Colour temperature 4000 CCT
- LED battery capacity indicator on the battery pack
- Compatible with all 18 V battery packs in the 9500 series

Extremely bright and lightweight!



Without rechargeable battery and charger

9579-10
EAN-No. 4000896265275

18V

Cordless dry vacuum cleaner, 18 V

- High-performance turbine ensures high suction power and high underpressure: This produces an excellent suction result
- By activating the manual filter cleaning function, the filter element is freed from deposited dust by a targeted blast of air
- Optimised cleaning and increased filling level of the container thanks to flat pleat filter
- Compact hose ∅ 32 mm, extendable from 0.5 m to 2.5 m
- Dust class: L
- Eco mode, extends the battery life to up to 30 minutes at a maximum negative pressure of 12,000 Pa
- Operating time with battery pack 5 Ah 15 mins with max. output
- Number of suction motors: 1
- Compatible with all 18 V battery packs in the 9500 series

With carrying strap for mobile use!



Without rechargeable battery and charger

9543-10
EAN-No. 4000896264957

18V

For cordless dry vacuum cleaners and corded dry vacuum cleaners

Accessories

	HAZET No.	Designation		EAN-No. 4000896+	
①	**9543-04/7**	Cleaning kit, for hard and soft floor coverings	7	270989	
②	**9543-01/5**	Fleece filter bag set	5	270965	
③	**9543-02**	Flat pleated filter	–	270941	
④	**9543-03**	Chassis	–	270927	



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Dry vacuum cleaner with chassis

- High-performance turbine ensures high suction power and high underpressure: This produces excellent suction results
- By activating the manual filter cleaning function, the filter element is freed from deposited dust by a targeted blast of air
- Optimised cleaning and increased filling level of the container thanks to flat pleat filter
- Accessories storage thanks to integrated holders on the suction head
- Compact hose ∅ 32 mm, extendable from 0.5 m to 2.5 m
- Dust class: L
- Voltage: 230 V
- Power consumption: 1200 W
- Maximum underpressure: 23000 Pa
- Filter area: 3000 cm²
- Container volume: 6 l
- Cable length: 5 m
- Hose length: 2.5 m
- Number of suction motors: 1
- Dimensions L x W x H: 300 x 230 x 440 mm
- Weight: 4.7 kg

230V



Incl. chassis (9543-03)



230 V

9643-10

EAN-No. 4000896264933

Right-angle grinder ∅ 125 mm

- Soft start thanks to microprocessor electronics
- Restart interlock after power failure
- Anti-kickback – device stops if the speed drops sharply due to canting
- Removable metal protective grille ensures dust protection
- Ergonomic arm working position thanks to slanted side handle
- Lockable slide switch
- Quick adjustment of protective cover without tools
- Spindle lock
- Spindle thread: M14
- Disc diameter: 125 mm
- Voltage: 230 V
- Power consumption: 1100 W
- Power output: 680 W
- Frequency 50/60 Hz
- Cable length: 4 m
- Revolutions per minute: 12000
- Vibration acceleration: 7.8 m/s² (uncertainty: K = 1.5 m/s²)
- Sound pressure level LPA: 90 dB (A)
- Sound power level LWA: 110 dB (A) (uncertainty: K = 3 dB)
- Dimensions L x W x H: 275 x 75 x 105 mm
- Weight: 2 kg

230V





230 V

9633-10

EAN-No. 4000896264919

Accessories on page 33

Pneumatic tools

Max. loosening torque: 1700 Nm

1/2"

- Loosening torque (max.): 1700 Nm determined with screw size M: 16
- High performance twin hammer mechanism
- Higher power output, more efficient air flow and improved air motor response torque
- Specially heat-treated internal parts for wear reduction
- Reduced vibrations
- Easy to use
- Revolutions per minute: 8491
- Air requirement: 198 l/min
- Sound pressure level: 91.33 dB(A) Lp A
- Vibration acceleration: 6.11 m/s²
- Housing length: 158 mm
- Weight: 2.15 kg

High power at a top price!



One-hand operation by changeover on rear of device



Exhaust air is guided downwards through the handle



9012ECO

EAN-No. 4000896273188

Max. loosening torque: 1200 Nm

1/2"

- Compact design for work in confined spaces
- Single hammer striking mechanism
- Revolutions per minute: 8800
- Air requirement: 127.4 l/min
- Sound pressure level (at working pressure): 92.2 dB(A) Lp A
- Vibration acceleration: 13.49 m/s²
- Weight: 1.3 kg
- Housing length: 81 mm

Extra short only 81 mm – Our top seller!



HAZET No.	Silicone protective cover	EAN-No. 4000896 +	
9012M-1-S	Suitable for 9012M-1	222735	




9012M-1

EAN-No. 4000896218356

TWIN TURBO: THE MOST POWERFUL HAZET IMPACT WRENCH SERIES EVER!



- 1/2" · 3/4" · 1" Twin Turbo impact wrenches to 4100 Nm power
- Twin Effect – More power in less time!
- Two air inlets and four air outlets
- 8-blade air motor with 25% higher impact performance ensures maximum torque
- HAZET's own Service Centre for the best aftersales service

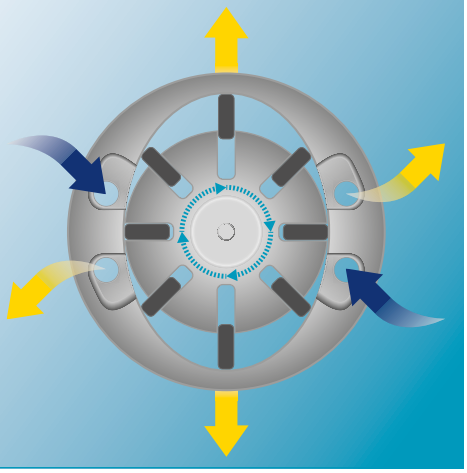

Extremely compact

12.5 1/2"

Max. loosening torque: 550 Nm

- Recommended torque: 450 Nm
- Sound power level (at working pressure): 103.9 db(A) Lp W
- Sound pressure level (at working pressure): 92.9 dB(A) Lp A
- Vibration acceleration: 7.64 m/s²
- Revolutions per minute: 8000
- Air requirement: 113 l/min
- Loosening torque (max) determined with screw size M: 16
- Weight: 1.1 kg
- Housing length: 70 mm





9012PTT
EAN-No. 4000896252732

Short: only 128 mm

12.5 1/2"

Max. loosening torque: 2200 Nm

- Recommended torque: 948 Nm
- Sound power level (at working pressure): 110.7 db(A) Lp W
- Sound pressure level (at working pressure): 99.7 dB(A) Lp A
- Vibration acceleration: 8.69 m/s²
- Revolutions per minute: 8300
- Air requirement: 147.2 l/min
- Loosening torque (max.) determined with screw size M: 16
- Weight: 1.6 kg
- Housing length: 128 mm





9012TT
EAN-No. 4000896226924

3/4" Impact wrench in 1/2" housing size

20 3/4"

Max. loosening torque: 1890 Nm

- Recommended torque: 900 Nm
- Sound power level (at working pressure): 110.3 db(A) Lp W
- Sound pressure level (at working pressure): 99.3 dB(A) Lp A
- Vibration acceleration: 11.39 m/s²
- Revolutions per minute: 8000
- Air requirement: 150 l/min
- Loosening torque (max.) determined with screw size M: 26
- Weight: 1.7 kg
- Housing length: 128 mm

9013MTT compared with 9013TT





9013MTT
EAN-No. 4000896258062

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Short: only 184 mm

20 3/4″

Max. loosening torque: 4100 Nm

- Recommended torque: 1890 Nm
- Sound power level (at working pressure): 110.5 db(A) Lp W
- Sound pressure level (at working pressure): 99.5 dB(A) Lp A
- Vibration acceleration: 10.69 m/s²
- Revolutions per minute: 5200
- Air requirement: 243.5 l/min
- Loosening torque (max.) determined with screw size M: 32
- Removable handle, 360° adjustable
- Weight: 4.5 kg
- Housing length: 184 mm



3/4″



9013TT
EAN-No. 4000896227143

Long spindle: 186 mm

20 3/4″

Max. loosening torque: 3800 Nm

- Recommended torque: 1758 Nm
- Sound power level (at working pressure): 113.5 db(A) Lp W
- Sound pressure level (at working pressure): 102.5 dB(A) Lp A
- Vibration acceleration: 9.02 m/s²
- Revolutions per minute: 5200
- Air requirement: 243 l/min
- Loosening torque (max.) determined with screw size M: 32
- Removable handle, 360° adjustable
- Weight: 5.5 kg
- Housing length: 184 mm
- Length of spindle: 186 mm

3/4″



9013LGTT
EAN-No. 4000896232277

Strong and handy

25 1″

Max. loosening torque: 4100 Nm

- Recommended torque: 1898 Nm
- Sound power level (at working pressure): 112.9 db(A) Lp W
- Sound pressure level (at working pressure): 101.9 dB(A) Lp A
- Vibration acceleration: 19.11 m/s²
- Revolutions per minute: 5200
- Air requirement: 235 l/min
- Loosening torque (max.) determined with screw size M: 32
- Removable handle, 360° adjustable
- Weight: 4.6 kg
- Housing length: 184 mm

1″





9014TT
EAN-No. 4000896234684

Long spindle: 240 mm

25 1″

Max. loosening torque: 3850 Nm

- **Short, compact design**
- Recommended torque: 1627 Nm
- Sound power level (at working pressure): 113.5 db(A) Lp W
- Sound pressure level (at working pressure): 102.5 dB(A) Lp A
- Vibration acceleration: 17.31 m/s²
- Revolutions per minute: 4600
- Air requirement: 235 l/min
- Loosening torque (max.) determined with screw size M: 32
- Removable handle, 360° adjustable
- Weight: 5.9 kg
- Housing length: 184 mm
- Length of spindle: 240 mm

1″



9014LGTT
EAN-No. 4000896234677

Max. loosening torque: 54 Nm

Mini and multifunction

- The open 17 mm inside hexagon means it is also possible to work on extra long threads
- Can be used for 6.3 ¼", 10 ⅜" and 12.5 ½" by replacing the ratchet heads
- Sound power level (at working pressure): 93.8 db(A) Lp W
- Sound pressure level (at working pressure): 82.8 dB(A) Lp A
- Vibration acceleration: 3.20 m/s²
- Revolutions per minute: 400
- Air requirement: 84 l/min
- Weight: 0.48 kg
- Length: 160 mm



17 mm



10 3/8"



6.3 ¼" 6.3 ¼"

4

mini TOOL

9023M-1
EAN-No. 4000896227112

Max. loosening torque: 40 Nm

Closed head

- For manual retightening with torque values: > 60 Nm
- Sound power level (at working pressure): 101 db(A) Lp W
- Sound pressure level (at working pressure): 90 dB(A) Lp A
- Vibration acceleration: 3.30 m/s²
- Revolutions per minute: 250
- Air requirement: 72 l/min
- Weight: 0.5 kg
- Length: 150 mm



¼"

6.3 ¼"

mini TOOL

9020P-2
EAN-No. 4000896184323

Max. loosening torque: 54 Nm

Closed head

- For manual retightening with torque values: > 260 Nm
- Sound power level (at working pressure): 103 db(A) Lp W
- Sound pressure level (at working pressure): 92 dB(A) Lp A
- Vibration acceleration: 3.90 m/s²
- Revolutions per minute: 300
- Air requirement: 103 l/min
- Weight: 0.5 kg
- Length: 150 mm



⅜"

10 ⅜"

mini TOOL

9021P-2
EAN-No. 4000896184545

Max. loosening torque: 108 Nm

Closed head

- For manual retightening with torque values: > 400 Nm
- Sound power level (at working pressure): 109 db(A) Lp W
- Sound pressure level (at working pressure): 98 dB(A) Lp A
- Vibration acceleration: 6.02 m/s²
- Revolutions per minute: 280
- Air requirement: 113 l/min
- Weight: 1.24 kg
- Length: 258 mm



½"

12.5 ½"

9022P-2
EAN-No. 4000896184538

Max. loosening torque: 102 Nm

Pin clutch mechanism

- For manual retightening with torque values: > 270 Nm
- Sound power level (at working pressure): 98 db(A) Lp W
- Sound pressure level (at working pressure): 91 dB(A) Lp A
- Vibration acceleration: 4.53 m/s²
- Revolutions per minute: 400
- Air requirement: 113 l/min
- Weight: 1.28 kg
- Length: 280 mm



½"

Impact air ratchet: High occupational safety thanks to reaction-free striking mechanism!

12.5 ½"

9022SR-1
EAN-No. 4000896170593

Max. loosening torque: 120 Nm

360° operating lever

- For manual retightening with torque values: > 500 Nm
- Sound power level (at working pressure): 102.2 db(A) Lp W
- Sound pressure level (at working pressure): 91.2 dB(A) Lp A
- Vibration acceleration: 4.87 m/s²
- Revolutions per minute: 200
- Air requirement: 107.6 l/min
- Weight: 1.55 kg
- Length: 285 mm



½"

Quiet Mode

30% less noise thanks to the ability to reduce operating noise / Quiet Mode (approx. 10 dB)



12.5 ½"

9022-360
EAN-No. 4000896209781


Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Micro die grinder

- Power: 190 watts
- Collet chuck: 3 mm
- Revolutions per minute: 60000

KEVLAR

Long service life thanks to Kevlar blades!

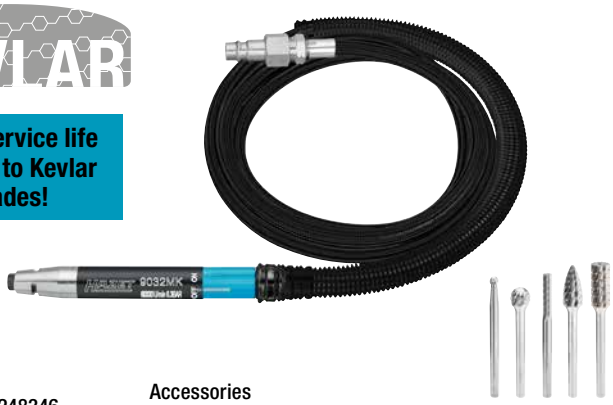


9032MK

EAN-No. 4000896248346

Accessories

HAZET No.	Carbide milling pin set	EAN-No. 4000896 +	
9032-03/5	3 mm (5 pieces)	222483	

Micro die grinder, angled

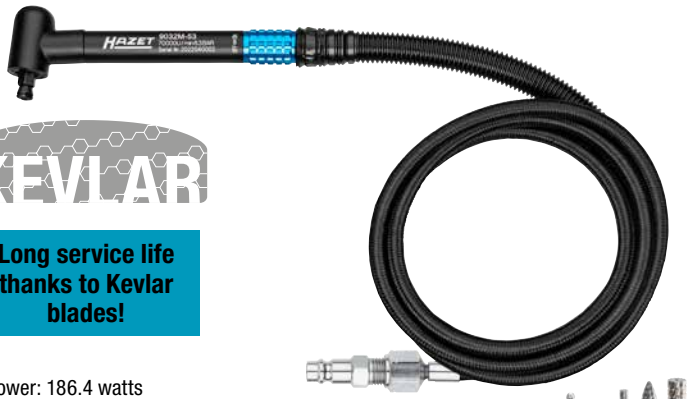

KEVLAR

Long service life thanks to Kevlar blades!

- Power: 186.4 watts
- Collet chuck: 3 mm
- Revolutions per minute: 70000



9032M-53


EAN-No. 4000896246205

Accessories

HAZET No.	Carbide milling pin set	EAN-No. 4000896 +	
9032-03/5	3 mm (5 pieces)	222483	

Mini die grinder

- Power: 224 watts
- 6 mm collet chuck with 3 mm adapter to accommodate both grinding pad dimensions
- Revolutions per minute: 30000

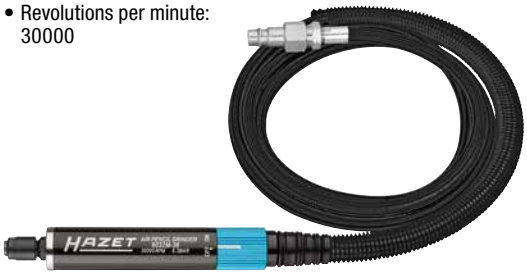





9032M-36


EAN-No. 4000896209606

Accessories

HAZET No.	Carbide milling pin set	EAN-No. 4000896 +	
9032-03/5	3 mm (5 pieces)	222483	
9032-06/3	6 mm (3 pieces)	222667	

Engraving pen

- Power: 186.4 watts
- Precise and lasting marking (theft protection, installation date, etc.) on workpieces (up to HRC55) · metals · stone · ceramics · plastics
- Revolutions per minute: 13000

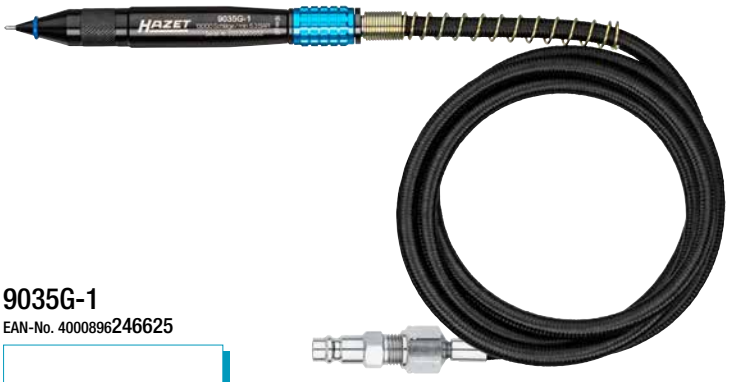

9035G-1

EAN-No. 4000896246625

Die grinder, straight design

- Power: 224 watts
- Lightweight, handy device for grinding, polishing, burnishing and deburring
- Collet chuck: 6 mm
- Revolutions per minute: 2000–25000



9032N-1

EAN-No. 4000896189359

Die grinder, angled

- Power: 224 watts
- Grinding, polishing, burnishing and deburring, particularly in areas that are difficult to access
- Continuous speed regulation via setting wheel on the upper side of the device
- Collet chuck: 6 mm
- Revolutions per minute: 2000–20000



9032N-5

EAN-No. 4000896198788

Belt sander

- Power: 417.6 watts
- Incl. hex-head wrench for fine adjustment of the belt and angle setting in the handle
- Revolutions per minute: 19000



9033N-4

EAN-No. 4000896210183

Abrasive belts



HAZET No.	Spare parts		EAN-No. 4000896 +	
9033-480/10	Abrasive belt set, grain size 80	10	139101	
9033-4100/10	Abrasive belt set, grain size 100	10	139118	
9033-4120/10	Abrasive belt set, grain size 120	10	139125	

Right-angle grinder

- Power: 671 watts
- For grinding wheels 0.8 – 6 mm thick
- Revolutions per minute: 12000



9033N-7

EAN-No. 4000896205547

HAZET No.	Spare parts		EAN-No. 4000896 +	
9233-010/5	Cut-off wheel set (125 x 1 x 22.23 mm)	5	219063	
9233-010/25	Cut-off wheel set (125 x 1 x 22.23 mm)	25	219070	
9233-011/10	Rough grinding wheel set (125 x 6 x 22.23 mm)	10	219087	

Angle grinder

- Power: 700 watts
- Revolutions per minute: 14000
- Length: 371 mm



9033P-8

EAN-No. 4000896190515



HAZET No.	Spare parts		EAN-No. 4000896 +	
9033P-08/5	Cut-off wheel set	5	201549	
9033P-08/25	Cut-off wheel set	25	201402	

Cut-off grinder

- Power: 522 watts
- For cut-off wheels: 76 x 2.1 x 10 mm
- Including 1 cut-off wheel
- Revolutions per minute: 2000 – 18000



9033-10

EAN-No. 4000896196371



HAZET No.	Spare parts		EAN-No. 4000896 +	
9033-010/5	Cut-off wheel set	5	199969	

Orbital sander

- Power: 375 watts
- Dust extraction
- Suction hose (2.0 m) and collection bag included
- Grinding disc with 15 bore holes, ∅ 150 mm with hook and loop fastener
- Air requirement: 57 l/min
- Weight: 0.9 kg
- Length: 231 mm



9033-2

EAN-No. 4000896156337



HAZET No.	Spare parts		EAN-No. 4000896 +	
9033-180/10	Grinding pad set, grain size 80	10	139330	
9033-1100/10	Grinding pad set, grain size 100	10	139347	
9033-1120/10	Grinding pad set, grain size 120	10	139354	
9033-1150/10	Grinding pad set, grain size 150	10	139361	
9033-020	15-hole grinding disc, ∅ 150 mm	1	156351	

Mini disc sander, angled

- Power: 224 watts
- Heavy-duty multi-bearing gearbox with a 2.5-times longer service life compared to conventional gearboxes
- Roloc® quick-change system: Combines with many abrasive media
- Grinding disc: ∅ 50 mm
- Weight: 0.44 kg
- Length: 126 mm



9033M-11

EAN-No. 4000896227129

Bristle grinder set

- For using with various grinding media to remove rust, paint, adhesive and sealing residues or to clean metal surfaces and weld seams
- Roloc® quick-change system allows the abrasive media to be changed quickly and easily without needing to use any extra tools
- Sound power level (at working pressure): 86 db(A) Lp W
- Sound pressure level (at working pressure): 75 dB(A) Lp A
- Vibration acceleration: 3.11 m/s²
- Revolutions per minute: 15000
- Air requirement: 79 l/min
- Weight: 0.54 kg
- Length: 112 mm
- Height: 152 mm

17



17 pieces



9033-11/17
EAN-No. 4000896222575

HAZET No.		Spare parts		EAN-No. 4000896 +	
9033-11-015	①	Bristle grinding disc, 1/4" UNC Roloc®, ∅ 50 mm	1	222841	
9033-11-020/4	②	Strip wheel set, ∅ 50.8 mm Roloc®, hard version	4	222834	
9033-11-030/4	③	Strip wheel set, ∅ 50.8 mm Roloc®, soft version	4	222728	
9033-11-036/2	④	Spare bristle grinder set, purple, ∅ 50 mm Roloc®, grain size: 36	2	222872	
9033-11-050/2	⑤	Spare bristle grinder set, green, ∅ 50 mm Roloc®, grain size: 50	2	222865	
9033-11-0120/2	⑥	Spare bristle grinder set, white, ∅ 50 mm Roloc®, grain size: 120	2	222858	

Mini polisher

- Power: 224 watts
- Heavy-duty multi-bearing gearbox with a 2.5-times longer service life compared to conventional gearboxes
- Grinding disc: ∅ 50 mm



9033M-9
EAN-No. 4000896227235

Mini polisher set

6

- Power: 238 watts
- Revolutions per minute: 3200

Contents:
– 1 polisher
– 1 wet grinding pad, ∅ 75 mm
– 1 plastic pad, hard (yellow)
– 1 plastic pad, soft (white)
– 1 lambskin
– 1 adjusting wrench



9033N-9
EAN-No. 4000896205561

Mini orbital sander set

36

- Power: 238 watts
- With hook and loop fastener
- Revolutions per minute: 15000

Contents:
– 1 orbital sander
– 1 grinding disc 50 mm (2")
– 1 grinding disc 75 mm (3")
– 10 grinding pads, each grain size 320
– 10 grinding pads, each grain size 400
– 10 grinding pads, each grain size 600
– 1 adjusting wrench
– 1 hook and loop fastener
– 1 air inlet nipple 9000-010



9033N-5
EAN-No. 4000896205585

Mini needle scaler

- 13 thin stainless steel needles ensure damage-free processing and highly fine surface structure
- 28 mm slim / short pin form and free needles allow you to reach difficult to access areas as well
- Suitable for processing stainless steel
- 3000 impacts / minute
- Length: 235.6 mm





Adjustable needle carriage with integrated needle guide ensures long service life

9035M-6
EAN-No. 4000896258109

HAZET No.	Spare parts		EAN-No. 4000896 +	
9035M-050	Spare needles for mini needle scaler 9035 M-6, ∅ 1.3 mm	13	233205	

Needle scaler

- Precisely removing rust, etc.
- Pistol shape
- Adjustable needle cover enables maximum utilisation of needles
- 2-piece housing design for easy maintenance
- 19 needles, ∅ 3 mm
- 3,200 impacts/min
- Length: 330 mm



9035-5

EAN-No. 4000896132355



HAZET No.	Spare parts		EAN-No. 4000896 +	
9035-050	Spare needles for needle scaler 9035-5, ∅ 3 mm	19	139385	

Vibration chisel set

5

- Vibration applications on screw connections seized by rust
- Strike rate adjustable in 9 levels up to 2600 strikes/min
- Including keyless drill chuck
- Length: 211 mm
- Height: 189 mm



9035V/5

EAN-No. 4000896213368

	HAZET No.	Spare parts	EAN-No. 4000896 +	
①	9035VH	Combination basic unit (vibration and hammer functions)	214020	
②	9035V-01	Semi-circular vibration chisel	214181	
③	9035V-02	Circular vibration chisel	214174	
④	9035V-03	Vibration chisel	214167	
⑤	9035V-04	Vibration chisel	214150	

Chisel hammer set

6

- Detaching car body sheets with compressed air and for industrial application
- Strike rate adjustable in 9 levels up to 2600 strikes/min
- Including keyless drill chuck
- Length: 211 mm
- Height: 189 mm



9035H/6

EAN-No. 4000896214655

	HAZET No.	Spare parts	EAN-No. 4000896 +	
①	9035VH	Combination basic unit (vibration and hammer functions)	214020	
②	9035H-01	Flat chisel	214136	
③	9035H-02	Sheet metal cutting chisel	213924	
④	9035H-03	Pointed chisel	214198	
⑤	9035H-04	Rivet cutting chisel	214143	
⑥	9035H-05	Curve cutting chisel	214525	

Sabre saw

11

- Support frame, adjustable in height, suitable for double-walled sheet steel
- Increased efficiency with reduction of weight, air consumption, noise generation and vibration
- Direction of air exhaust adjustable
- Suitable for cutting small radii
- Cutting capacity aluminium: 4 mm
- Cutting capacity sheet steel: 3 mm
- Strokes/min.: 9500
- Particularly suitable for cleaning sensor shafts etc., thanks to the attachment of file blades (included in delivery)

9034P-2

EAN-No. 4000896218288








HAZET No.	Spare parts		EAN-No. 4000896 +	
9034P-R/5	Reciprocal saw blades, chamfered teeth, length: 153 mm	5	218318	
9034P-050/5	File set, length: 153 mm	5	218349	
9034P-018/5	Saw blades, 93 mm, 18 teeth	5	225958	
9034P-024/5	Saw blades, 93 mm, 24 teeth	5	225965	
9034P-032/5	Saw blades, 93 mm, 32 teeth	5	225989	

More vibration chisels

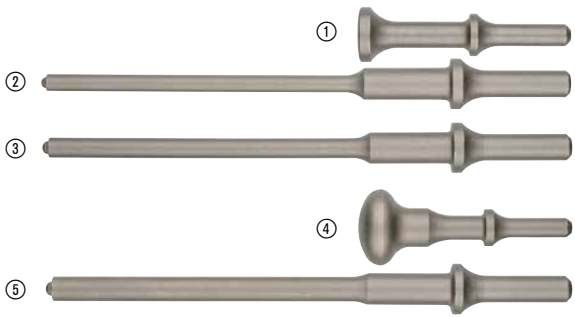

	HAZET No.	Designation		EAN-No. 4000896 +	
①	9035V-05	Flat vibration chisel	1	227266	
②	9035V-06	Vibration drift pin 6 mm	1	227259	
③	9035V-08	Vibration drift pin 8 mm	1	227297	
④	9035V-09	Curved vibration chisel	1	227280	
⑤	9035V-010	Vibration drift pin 10 mm	1	227273	

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Air blow and suction gun, switchable



- Sucking up dirt into the collection bag as well as for blowing surfaces clean
- Deflector special bag insert protects the bag against damage, e. g. due to swarfs, by preventing direct impact of the accelerated swarfs
- One-hand reversing switch
- Metal housing
- Vacuum level: 7.5 mmHg

Incl. accessories



9043N-10
EAN-No. 4000896198382

HAZET No.	Spare parts		EAN-No. 4000896 +	
9043N-10-07/2	Dust collecting bag set	2	202607	
9043N-10-08/2	Fine dust collecting bag set	2	222827	

Cooling system rinser, wash-gun set

- Effective, powerful and solvent-free cleaning of e.g. cooling systems with graduated system cleaning nozzle
- Cleaning without the use of aggressive chemicals or solvents
- Swivel joint at the water connection, helps to avoid "hose spaghetti"
- Continuous independent regulation of water and compressed air supply
- Temperature range: -10 °C to +40 °C

Contents:
– Water connection variants: 13 mm (1/2") nipple for water coupling (Gardena system compatible) or 20 mm (3/4") GHT thread
– Graded system cleaning nozzle
– Jet washing nozzle



9048P-2/3
EAN-No. 4000896234608

Car body gun

- For underbody protection and cavity sealing
- Suitable for aqueous and oily liquids
- Including metal intake pipe, nozzle and cavity tube
- Temperature range: -10 °C to 80 °C
- Max. working pressure: 16 bar
- Length: 251 mm





9042P-4
EAN-No. 4000896209613

Blind rivet gun

- Pneumatic / hydraulic
- For blind rivets up to 4.8 mm
- Possible rivet sizes:
  – Aluminium rivets: 2.4 – 4.8 mm
  – Steel rivets: 2.4 – 4.8 mm
  – Stainless steel rivets: 2.4 – 3.2 mm
- 4 nose pieces (one pre-installed): 2.4 · 3.2 · 4 · 4.8 mm
- Total stroke: 14 mm
- Sturdy metal housing
- Tractive power: 8700 N
- Coupler plug with rotary joint for flexible operation
- Air requirement: 1 l / stroke





Detailed information

9037SPC
EAN-No. 4000896150168

Air blow gun, long (1085 mm)



9040LG-3/2
EAN-No. 4000896206339

Nozzles for long air blow gun:

Venturi nozzle

- 100% increase in air outlet quantity thanks to Venturi effect
- For 9040-4 and 9040 LG-3/2



9040LG-3-01
EAN-No. 4000896241514

Lateral nozzle 90°

- Nozzle enables lateral blow-out, e.g. for cleaning cooling fins and other hard-to-reach areas
- For 9040-4 and 9040 LG-3/2



9040LG-3-02
EAN-No. 4000896241521

Turbo air blow gun

- Swirl nozzle generates a strong air pulse for cleaning even stubborn soiling
- To be used on machinery, vehicles, in workshops, for wood work, in hobby workshops
- Highly practical design
- Air inlet: inside thread 12.91 mm (1/4")
- Coupler plug: nominal size 7.2 (included)
- Hose diameter (recommended): 10 mm
- Max. pressure: 12 bar
- Sound pressure level (at working pressure): 91 dB(A) Lp A
- Sound power pressure (at working pressure): 102 dB(A) Lp W
- Air requirement: 80 l/min (at working pressure)
- Length: 150 mm



Extremely effective due to swirled air impact!

9040T-1
EAN-No. 4000896252626

2-way air blow gun with replaceable nozzle

- Choice of air supply at tool head or handle
- Exchangeable nozzles:
  – Short nozzle for areas with restricted access
  – Long nozzle (112 mm) with safety nozzle tip (scratch protection)
- Max. working pressure: 10 bar





Incl.

9040-4
EAN-No. 4000896176236

Extendable

Nozzle set

- Extension of the application ranges of the 2-way air blow gun 9040-4 and the long air blow gun 9040Lg-3/2
- Wide range of applications thanks to various nozzle designs
- Connection (outside thread): 1/8" PF 28

Contents:
① Long rubber nozzle 63 mm (scratch protection)
② Short rubber nozzle 13 mm (scratch protection)
③ Plastic surface nozzle (surface cleaning)
④ Metal nozzle with spherical air outlet (non-blocking)
⑤ Metal nozzle with safety function (non-blocking)




9040-43/5
EAN-No. 4000896263646



Standard nozzle

- Curved tube: ∅ 8 mm, 100 mm
- Temperature range: -10 °C to 80 °C
- Max. working pressure: 16 bar
- Length: 247 mm


9040P-1
EAN-No. 4000896209545

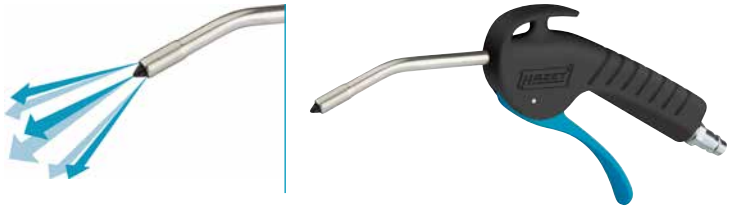

Standard nozzle, low-noise

- Curved tube: ∅ 8 mm, 100 mm
- Non-blocking
- Temperature range: -10 °C to 80 °C
- Max. working pressure: 12 bar
- Length: 255 mm


9040P-3
EAN-No. 4000896209644

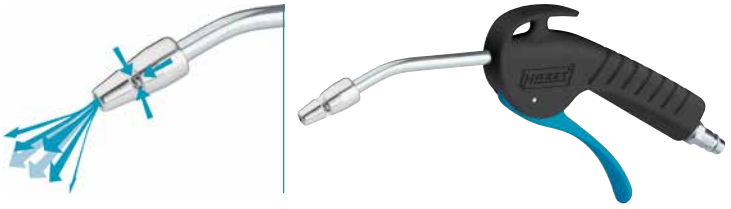

Venturi nozzle

- Curved tube: ∅ 8 mm, 100 mm
- 100% increase in air outlet quantity thanks to Venturi effect
- Temperature range: -10 °C to 80 °C
- Max. working pressure: 16 bar
- Length: 265 mm

9040P-4
EAN-No. 4000896209569

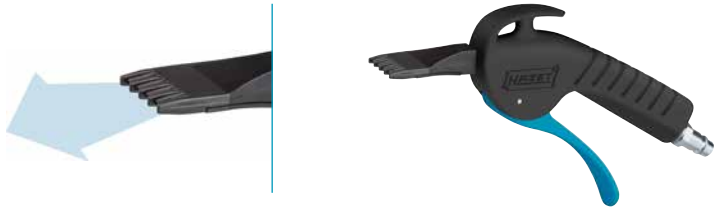

Broad, flat nozzle

- Considerable blowing force
- Non-blocking
- Temperature range: -10 °C to 80 °C
- Max. working pressure: 8 bar
- Length: 203 mm

9040P-5
EAN-No. 4000896209576



Long nozzle

- Straight tube: ∅ 8 mm, 300 mm
- Temperature range: -10 °C to 80 °C
- Max. working pressure: 16 bar
- Length: 420 mm

9040P-2
EAN-No. 4000896209552

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Hose reel

- Automatic hose reel offers tidiness in the workshop – hose not left lying around, thus reducing the risk of accidents
- For compressed air
- Max. working pressure: 20 bar
- Length of connection hose: 0.8 m
- Automatic guidance winds the hose neatly
- Braked winding to prevent risk of accidents

Hose length: 15 m




- **Hose inside Ø: 10 mm**
- Temperature range: -40 °C to 60 °C
- Dimensions: 459 x 378 x 205 mm


9040N-10
EAN-No. 4000896206445




- **Hose inside Ø: 13 mm**
- Temperature range: -40 °C to 80 °C
- Dimensions: 500 x 418 x 210 mm

9040N-13
EAN-No. 4000896214648







Open hose reel

- Automatic hose reel ensures tidiness
- Robust steel design with roller guide
- For compressed air
- Integrated roller inlet
- Swivelling base 180°
- Open design against accumulation of dirt
- Visual inspection of the hose
- Dimensions: 400 x 186 x 522 mm



- **Hose inside Ø: 10 mm**

9040OS-10
EAN-No. 4000896252602

Hose length: 20 m

Cable reel

- Automatic cable reel offers tidiness in the workshop – cable not left lying around, thus reducing the risk of accidents
- Including line circuit breaker
- Only suitable for indoor use
- 230 V AC
- Cable: H07RN-F 3 x 2.5 mm²
- Cable length: 20 m
- Connecting cable length: 1.3 m
- Automatic guidance winds the hose neatly
- Braked winding to prevent risk of accidents



9040D-2.5
EAN-No. 4000896214631

Cable length: 20 m

Compressed air hose

- Wide temperature range
- Complies with DIN EN ISO 5774
- Compressed air hose with quick coupling and connecting nipple
- Pressed coupler bushing / coupler plug
- Burst pressure: 60 bar
- PVC-NBR hybrid polymer compressed air hose



Incl. kink protection on both sides

HAZET No.	Hose length	Inside diameter of the hose Ø	EAN-No. 4000896+	
9040N-1010	10 m	10 mm	263684	
9040N-1020	20 m	10 mm	263707	

Spiral hose

- High flexible polyurethane hose
- Connecting pieces with 360° swivel joints
- Temperature range: -20 °C to 60 °C
- Working pressure: 10 bar



HAZET No.	Hose length	Inside diameter of the hose Ø	EAN-No. 4000896+	
9040-7	7.62 m	6.35 mm	153404	
9040S-10	7.62 m	10 mm	212361	

Hose lubricator


- For motor-driven pneumatic tools with outside thread air inlet 12.91 mm | 1/4"
- Automatic oiling for extending the service life of pneumatic tools
- Quick changeover between different pneumatic tools thanks to integrated air connection coupling and nipple
- Flexible connection minimises the effects of drop damage for tools and oilers
- Refillable, filling capacity 28 ml
- Maximum air flow rate: 261 l/min.
- Compressed air hose: 300 mm
- Especially suited for connections without own oil supply
- Incl. hose, compressed air coupling and nipple ensures flexible use on various lines in the system and on various devices

NEW!

Compressed air coupling: Germany (standard) · Austria · Slovenia · Hungary · China · India · Portugal · Poland · Romania · Turkey NW7.2 type Rectus corresponds to **9000-010/3**



9070N-2
EAN-No. 4000896277308

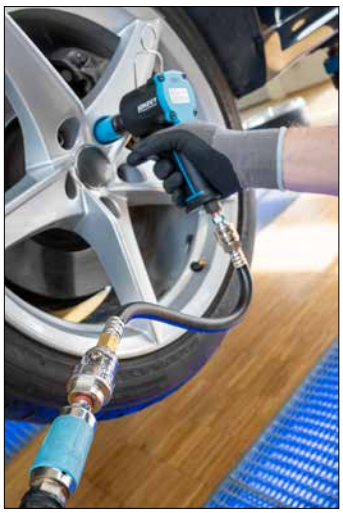

Compressed air quick coupling

- For connecting compressed air to pneumatic tools
- Inside thread: 16.41 mm | 3/8"
- One-hand operation – Easy operation, even with gloves
- Material: Steel, nickel-plated
- Working range: 0 – 15 bar



9001-061
EAN-No. 4000896258468

Safety coupling

- For air inlet nipple 7.2 mm
- Working range: 0 – 20 bar
- Air inlet thread (inside thread): 16.41 mm | 3/8"
- Suitable for hose reel 9040N-10



9000-061
EAN-No. 4000896195299

Safety coupling

- For air inlet nipple: 10 mm
- Working range: 0 – 50 bar
- Air inlet thread (inside thread): 20.95 mm | 1/2"
- Suitable for hose reel 9040N-13



9000-062
EAN-No. 4000896218936

Rotary joint

- With continuous air flow rate reducer
- Air flow regulation by means of setting wheel
- 360° rotation joint in 2 axes
- Maximum pressure: 16 bar
- Air inlet: inside thread 12.91 mm 1/4"
- Air outlet: inside thread: 12.91 mm 1/4"



9000-040
EAN-No. 4000896195350

Rotary joint

- 360° rotation joint in 2 axes
- Maximum pressure: 16 bar
- Air inlet: inside thread: 12.91 mm 1/4"
- Air outlet: outside thread: 12.91 mm 1/4"



9000-041
EAN-No. 4000896204441

Compressed air reducer

- **Reduction of working pressure to protect high-quality pneumatic equipment**
- **Max. inlet pressure: 10 bar**
- **Outlet pressure 6.3 bar**
- **Air inlet: inside thread 12.91 mm 1/4"**
- **Air outlet: outside thread: 12.91 mm 1/4"**



9000-080
EAN-No. 4000896214709

Air inlet nipple

- For connecting our hose reels with 16.41 mm (3/8") coupler thread (outside) to type 1 compressed air couplings
- 16.41 mm (3/8") inside thread



9000-015
EAN-No. 4000896253258



Grease gun

- Filling capacity: 400 ml

9042N-1
EAN-No. 4000896176472



Mini grease gun

- Filling capacity: 80 g

2162M
EAN-No. 4000896185634



High performance lubricant

- Grease cushion: 60 ml

Made in Germany

9300N-60
EAN-No. 4000896203406



Mini oiler

- Filling capacity: 28 ml

9070N-1
EAN-No. 4000896206407



Special pneumatic tool oil

- Filling capacity: 100 ml

Made in Germany

9400-100
EAN-No. 4000896191390



- Filling capacity: 1,000 ml

Made in Germany

9400-1000
EAN-No. 4000896191406

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Wireless charging light sets



Contents:
– 1979W-11 pen light
– 1979W-85 solid light
– 1979WP-2 charging pad for 2 lights
– Incl. 100 cm USB-C cable and 2 A / 5 V power supply unit

1979W2/3
EAN-No. 4000896258208



Contents:
– 2 x 1979W-11 pen light
– 1979WP-2 charging pad for 2 lights
– Incl. 100 cm USB-C cable and 2 A / 5 V power supply unit

1979W-11/3
EAN-No. 4000896235247



Contents:
– 1979W-82 LED pocket light
– 1979W-92 LED slim light
– 1979WP-2 charging pad for 2 lights
– Incl. 100 cm USB-C cable and 2 A / 5 V power supply unit

1979W1/3
EAN-No. 4000896241408



Contents:
– 1979W-11 pen light
– 1979W-82 pocket light
– 1979WP-2 charging pad for 2 lights
– Incl. 100 cm USB-C cable and 2 A / 5 V power supply unit

1979NW/3
EAN-No. 4000896235261





Wireless charging lights

HAZET No.	Designation	Main light lumen I operating time	Top light lumen I operating time	EAN-No. 4000896 +	
① 1979W-82	LED pocket light	30 – 300 lm I 2 h	100 lm I 5 h	227228	
② 1979W-11	LED pen light	20 – 200 lm I 2.5 h	120 lm I 4 h	235230	
③ 1979W-85	LED solid light	60 – 600 lm I 3 h	300 lm I 4.5 h	241484	
④ 1979W-92	LED slim light	110 – 1100 lm I 3 h	150 lm I 11 h	241422	
⑤ 1979WP-1	Charging pad for one light	–	–	227952	
⑥ 1979WP-2	Charging pad for two lights	–	–	227945	

With charging cable



Choice of rechargeable battery or battery!









UV light for faster and clearer localisation of leaks





Incl. USB-C charger cable

HAZET No.	Designation	Main light lumen I operating time	Top light lumen I operating time	EAN-No. 4000896 +	
① 1979N-82	LED pocket light	30 – 300 lm I 2 h	100 lm I 5 h	227211	
② 1979-11	LED pen light	20 – 200 lm I 2.5 h	120 lm I 4 h	235254	
③ 1979N-85	LED solid light	60 – 600 lm I 3 h	300 lm I 4.5 h	241491	
④ 1979N-92	LED slim light	110 – 1100 lm I 3 h	150 lm I 11 h	241415	
⑤ 1979-74	LED penlight, focusable	500 lm I 2 h	–	272853	
⑥ 1979-75	UV LED torch light	800 lm I 3 h	–	272891	


VIDEO BORESCOPES WITH HD CAMERA – OPTIMAL DETAIL ACCURACY!

- Bright and sharper image
- Better details
- Clearer image



HD video borescope set with 360° swivelling probe ∅ 3.9 mm

- Wired connection of a smartphone as a display (Lightning / USB-C)
- Additional magnification of the image possible using the smartphone display (drag)
- Image memory dependent on smartphone memory
- Robust, swivelling and adjustable smartphone holder (span: 58 – 100 mm)
- With temperature warning alarm (app) and automatic switch-off if the maximum permissible camera temperature is exceeded
- Photo and video recording via app or control via operating elements of the borescope
- Joystick control of the camera probe on the basic unit
- Focus range (DOF): 5 – 100 mm
- Viewing angle (FOV): 100°



5



Your own smartphone as a display!

Removable Li-Ion battery (1 x type 18650) without additional tools

Fully articulating probe with ∅ 3.9 mm

Your own smartphone as a display



Joystick control



Control via joystick and operating elements



Smartphone holder (58 – 100 mm)



4812-24/4AF	
Camera probe	∅ 3.9 mm articulating probe with front camera (Axial 180°, Radial 360°)
Display	Depending on the smartphone connected
Zoom	Zoom: 5x (with display of the zoom factor in the app)
Display resolution	Depending on the smartphone connected
Brightness setting	3-level
Energy source	Removable Li-ion battery (1 x type 18650) without additional tools
Image format (jpg)	640 x 480 / 1280 x 720 pixels
Video format (MP4)	640 x 480 / 1280 x 720 pixels
Data transfer	USB-C
IP protection rating	IP54 (basic unit) I IP67 (probe)
Handling	With handle and sturdy smartphone holder
Tripod thread	✓
Connectivity	USB-A to USB-C / USB-A to Lightning / USB-A to Micro-USB
Smartphone App Android / IOS	✓
Weight, device without battery and smartphone	0.38 kg
Dimensions (L x W x H)	220 x 78 x 50 mm

5-piece set in protective soft case with moulded insert:
– Basic unit and HD probe
– Data cable USB-A to Lightning (iOS), length: 0.3 m
– Data cable USB-A to USB-C (Android, current iOS etc.), length: 0.3 m
– Data cable USB-A to Micro-USB (Android etc.), length: 0.3 m
– Charging cable USB-A to USB-C, length: 1.0 m

Detailed information



4812-24/4AF
EAN-No. 4000896264568

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.



Thermal camera with fusion mode

- Screen size: 2.4 inch LCD screen
- Display resolution: 320 x 240 pixels
- Thermal (or Enhanced IR) resolution: 160 x 120 pixels
- Field of view: 50° x 50°
- Temperature measuring range: -20°C to 550°C
- Battery life: up to 8 h
- Integrated 4 GB flash memory (up to 18,000 images)
- Dimensions (H x W x D): 196 x 117 x 59 mm
- Weight: 290 g

Detailed information



Photo + thermal object image = Fusion Mode





Laser pointer for targeting

Additional camera for creating visual images enables Fusion Mode (640 x 480 pixels)

6 colour palettes for diagnostics

Field of view: 50° x 50°

1992N-1

EAN-No. 4000896263523



Digital current clamp meter

- Measuring voltage, current and resistance
- Simple operation thanks to clear control panel and illuminated LCD display
- AC/DC current measurement without disconnecting the cable
- NCV (Non-Contact Voltage) function
- With multimeter function
- Measurement category CAT III 300 V, CAT II 600 V
- Capacitance measurement up to 20 mF
- Pliers opening ∅ 17 mm
- Incl. continuity test, diode test, data hold and auto power-off function
- Incl. storage bag and protective cover (protects against drop damage and dust)
- Including CAT III test lead set
- Power supply 2 x 1.5 V AAA batteries
- Dimensions L x W x H: 33.50 x 60 x 175 mm
- Weight (without batteries): 150 g



Three measuring devices in one:

1. Current clamp meter

2. Multimeter

3. Voltage tester (non-contact)




2152-610

EAN-No. 4000896268542

Multimeter

- For measuring voltage, resistance, frequency, capacitance and temperature
- Protective cover protects multimeter against damage from being dropped
- Including measuring tips for clipping into the protective cover
- Including temperature probe from -20° C to 200° C
- Including 2 x AA batteries
- DC voltage: 0 – 600 V
- AC voltage: 0 – 600 V
- Direct current: 0 – 10 A
- Alternating current: 0 – 10 A
- Resistance: 0 – 60 MOhm
- Diode test
- During the continuity test, the integrated buzzer signals continuity below 50 Ohm
- Frequency: 0 – 10 MHz
- Duty cycle
- Capacitance measurement: 0 – 60 MOhm
- Automatic switch-off
- Data hold
- True RMS
- CAT III 600 V







2152-600

EAN-No. 4000896246762

Mini battery cell tester with QR code function

- For 12 V systems in passenger cars, commercial vehicles, motorcycles as well as 12 V batteries
- Output of the analysis results on the display plus transfer of the results via QR code to smartphone / tablet
- Option to individualise the test results shared by QR code (number plate · repair workshop · tester · test date)
- Tests and detects defective cells in all types of starting batteries, including lead-acid batteries, AGM flat batteries, AGM spiral batteries, GEL batteries, start-stop batteries and rechargeable Li-ion batteries
- Does not require its own battery – constant operational readiness
- Analysis of batteries in accordance with most battery standards, such as CGA · BCI · CA · MCA · DIN · IEC · EN · SAE · GB
- Large lithium battery working range, e.g. according to CCA standard 20 – 1000 A
- Large lead-acid battery working range, e.g. to CCA standard 100 – 2000 A



Battery test
Starter test
Alternator test



4650-6

EAN-No. 4000896264629




Open-sholder frame ensures free moving space – easy on the back and knees



Extra thick vinyl padding ensures longer, more comfortable working



4 smooth-running and robust swivel castors with ball bearings enable easy gliding



Fully welded heavy-duty frame for maximum stability in tough workshop use

NEW!

Comfortable working on and underneath a vehicle!

Mechanic's creeper XXL

- Prevents direct contact with dirt, oil or cold on the workshop floor, increases safety and hygiene in the workshop
- 480 mm extra wide lying surface: 1.7 times wider than standard models
- Integrated armrest for relaxed working
- Dimensions: L x W x H: 1020 × 495 × 140 mm



195XXL-2
EAN-No. 4000896275991

Especially deep for maximum freedom of movement and comfort when working under the vehicle!

Mechanic's creeper

- Rigid one-piece construction made of high strength plastic, black
- 6 smooth-running swivel castors (∅ 70 mm) with rubber running surface, oil resistant and low-noise
- Ergonomically shaped: cut out arm areas for optimal elbow room
- Very comfortable: soft upholstered head rest, HAZET blue
- Practical tool trays and small parts areas, right and left
- Practical carrying handle in the foot area
- Easy to clean
- Dimensions: L x W x H: 1030 × 480 × 115 mm



195N-2
EAN-No. 4000896252169

Mechanic's creeper, foldable

- Combines creeper and seat
- High capacity up to 150 kg! (lying or sitting)
- 6 castors (∅ 63 mm)
- Quick and easy switch between both functions
- Cushioned reclined surface, lead part in HAZET blue
- Dimensions: Lying position L x W x H 1198 x 440 x 135 mm, seat height: 420 mm, seat base: 300 x 310 mm

Sturdy steel tube frame with 2.4 mm material thickness!





195N-3
EAN-No. 4000896256761

Mechanic's mat

- 975 x 385 x 30 mm



195-5
EAN-No. 4000896153718

Kneeling mat

- 450 x 210 x 30 mm



195-1
EAN-No. 4000896121069

Pneumatic chair

- 5 low-noise, smooth-running castors with multiple bearings ∅ 75 mm
- Large, extra thick cushion ∅ 350 mm
- Easy to clean
- Capacity: dynamic capacity up to 150 kg
- Pneumatically adjustable in height: 430–550 mm
- Tool storage with practically divided compartments
- Provides a comfortable seat at the work area
- Tilt-resistant

Particularly stable design thanks to square tubular frame



195N-4
EAN-No. 4000896261949

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Magnetic pick-up tool

- Permanent magnet
- Flexible shank
- For easily picking up metal objects from installation spaces that are difficult to access
- Special design prevents unwanted rolling away
- Hanging hole in the handle keeps the workshop tidy



NEW SIZE!

3K System

Two-coloured handle = three plastics:

1. Hardened core holds the lance extra-firmly in position
2. Soft component ensures very good grip even under difficult working conditions and with lubricating surfaces (oils, greases)
3. Hard component (very robust) gives the perfect shape, stability and a premium feel with every search operation

Made in Germany

HAZET No.	Length (mm)	∅ (mm)	(g)	EAN-No. 4000896 +	
1976N-3	300	3	300	279180	
1976-11	470	8	1100	273508	
1976-45	515	15	4500	273485	

Pressure sprayer

- Spraying with cleaning agents and disinfectants as well as for degreasing and lubrication
- Net volume: 1 l



199N-1
EAN-No. 4000896189007

Pressure foam sprayer

- Three nozzles (in scope of delivery) for generating wet and dry foams as well as for implementing different reaction times
- Net volume: 0.75 l



199-3
EAN-No. 4000896207237

Spray bottle, refillable

- Use with multi-purpose spray, such as e.g. penetrating oil, rust remover, as well as rim and brake cleaner
- Including 155 mm long jet nozzle and short spray nozzle
- Filling capacity: 0.23 l



199-4
EAN-No. 4000896198429

High performance suction gun



- Filling capacity: 1 l

2162-6
EAN-No. 4000896174454

- Filling capacity: 500 ml

2162-4
EAN-No. 4000896174850

Magnetic holder

- Magnetic pull-off force: axial max. 18 kg



197-10
EAN-No. 4000896254392

Magnetic button set

3

- Magnetic pull-off force: max. 3 kg
- Contents: 3x magnetic buttons



197-11/3
EAN-No. 4000896255191

Magnetic cup

- ∅ 150 mm



197-3
EAN-No. 4000896158584

Magnetic holder

- Loading capacity: 10 kg
- Height: 400 mm
- Length: 140 mm



9070-10
EAN-No. 4000896158157

Working gloves

- Very good freedom of movement and fit



1987N-4
EAN-No. 4000896203840

Multifunctional drain pans

- Filling capacity: 6 l



197N-1
EAN-No. 4000896198924

- Filling capacity: 16 l



197-2
EAN-No. 4000896146802

- Filling capacity: 50 l



Made in Germany

197-50
EAN-No. 4000896210008

Telescopic inspection mirror set

4




- **4-piece set:**
  - Telescopic rod: 300–740 mm
  - Round mirror: ∅ 30 mm and ∅ 50 mm
  - Rectangular mirror: 65 x 43 mm

1977N-2/4
EAN-No. 4000896269525

Dashboard protection set

4

- With handle

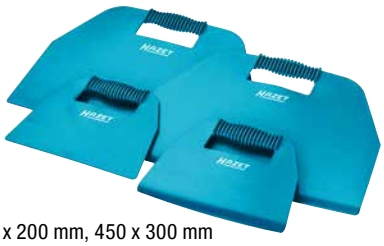

- Straight: 270 x 200 mm, 450 x 300 mm
- Angled: 270 x 200 mm, 450 x 300 mm

4852/4
EAN-No. 4000896210114

Wedge, plastic

- For car body work, e.g. for loosening decorative strips, covers, graphics, etc. without damage
- Tip: 0.5 mm
- Dimensions: 190 x 30 x 25 mm



Made in Germany
1965-20
EAN-No. 4000896009183

Combination lever


- Quick and easy loosening of the decorative strips and door panels
- Avoids damage to lacquered surfaces, plastic and metal parts
- Removal of protective caps and covers
- Dimensions: 270 x 22 mm



1965-21
EAN-No. 4000896087839

Extractor hook

- Removal of e.g. trims · covers · plugs · fan nozzles · instrument panels · speedometers · instrument clusters inside the vehicle as well as on the car body
- High stability and flexibility despite small blade ∅ of 2 mm
- Total length: 180.5 mm

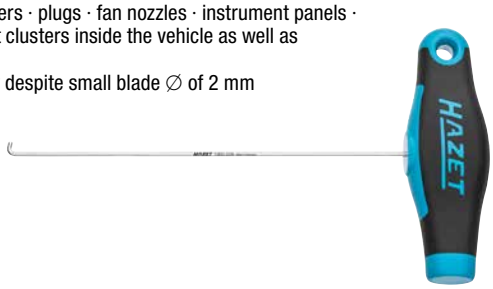

Made in Germany
1965-22A
EAN-No. 4000896247448

Universal hook / wedge set

2


- For universal use
- Plastic wedge: length: 214 mm, width: 26.5 mm
- Universal hook: length: 180 mm



1965/2
EAN-No. 4000896223008

Impact universal joint sockets

- Hinge with 25° angular movement for use in spaces with restricted access and for getting around obstructive edges
- Short, space-saving design suitable for impact wrenches
- Particularly suitable for automotive applications, where space is limited, for chassis and brake repair, and in the engine compartment
- With borehole for locking pin or safety spring and groove for O-ring
- With traction profile
- Surface: burnished, oiled
- DIN 3121



1/9

1/9



1/2"Sets

- *s* 13 · 14 · 15 · 16 mm
- **Contents:**
  - 900SG-13
  - 900SG-14
  - 900SG-15
  - 900SG-16

12.5 ½″

4

Made in Germany
900SG-1316/4
EAN-No. 4000896272778

- *s* 17 · 18 · 19 · 21 mm
- **Contents:**
  - 900SG-17
  - 900SG-18
  - 900SG-19
  - 900SG-21

12.5 ½″

4

Made in Germany
900SG-1721/4
EAN-No. 4000896272792

3/4" Set

- *s* 22 mm and *s* 24 mm
- **Contents:**
  - 1000SG-22
  - 1000SG-24

20 ¾″

2

Made in Germany
1000SG-2224/2
EAN-No. 4000896272815



HAZET No.	■	*s* mm	*l* mm	d_1 mm	d_2 mm	*t* mm	EAN-No. 4000896 +
900SG-13	12.5 ½″	13	61.5	21	30	7.6	271863
900SG-14	12.5 ½″	14	61.5	22.3	30	8.5	271887
900SG-15	12.5 ½″	15	63	23.5	30	8.5	271900
900SG-16	12.5 ½″	16	63	24.8	30	8.5	271924
900SG-17	12.5 ½″	17	63	26	30	9	271948
900SG-18	12.5 ½″	18	63	27.3	30	10	271962
900SG-19	12.5 ½″	19	64.3	28.5	30	10	272006
900SG-21	12.5 ½″	21	65.7	31.5	30	10	271986

HAZET No.	■	*s* mm	*l* mm	d_1 mm	d_2 mm	*t* mm	EAN-No. 4000896 +
1000SG-22	20 ¾″	22	90	37	44	11	271627
1000SG-24	20 ¾″	24	90	35	44	12	271641



Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.



3/4" Impact adapter, quick coupler

24 | 20 ¾" | NEW!

- Output: 24 mm inside hexagon
- Length: 54 mm
- For impact operation
- Surface burnished / chrome-plated





Made in Germany
1003S-2
EAN-No. 4000896273584

Impact adapter, quick coupler set

24 | 12⅝ ½" | 20 ¾" | 25 1" | 4 | NEW!



Made in Germany
1003S/4
EAN-No. 4000896273904

1/9

- **Contents:**
  - 1003S-2
  - 1003S-07K (1/2")
  - 1003S-08K (3/4")
  - 1003S-09K (1")

Impact socket set

NEW!



Made in Germany
163-612/40
EAN-No. 4000896264704



24 | 24 | 40

20 ¾" | 12⅝ ½" | ½" S 24 mm

2/3+

Impact socket set

NEW!



Made in Germany
163-570/24
EAN-No. 4000896233441



24 | 24 | 24

½" S 24 mm

20 ¾" | 12⅝ ½"

1/3+

NEW! | 20 ¾" | 12⅝ ½" | ½" S 24 mm | 4



Made in Germany
1003S-7/4
EAN-No. 4000896280971



3



Made in Germany
903SLG6/3
EAN-No. 4000896264643

½" S 24 mm

NEW! | 11



Made in Germany
900SZ6/11
EAN-No. 4000896225378 | 20 ¾" | ½" S 24 mm

NEW! | 11



Made in Germany
990S/11
EAN-No. 4000896162406 | 20 ¾" | ½" S 24 mm

NEW! | 11



Made in Germany
985S/11
EAN-No. 4000896211951 | 20 ¾" | ½" S 24 mm

6



Made in Germany
995S6/6
EAN-No. 4000896264780 | 12⅝ ½" | ½" S 24 mm

1/2" Impact socket, hexagon

- Double protection: Easy-to-rotate external plastic sleeve (replaceable) to protect the rims when screwing wheel bolts. Plus: Internal plastic insert to protect the surface of wheel bolts
- Length: 87 mm



s 17 mm
Made in Germany
903SLG-17
EAN-No. 4000896045822



s 19 mm
Made in Germany
903SLG-19
EAN-No. 4000896045839



s 21 mm
Made in Germany
903SLG-21
EAN-No. 4000896055135



s 22 mm
Made in Germany
903SLG-22
EAN-No. 4000896155453

- Extra long: 130 mm



s 17 mm
Made in Germany
904SLG-17
EAN-No. 4000896100576



1/2" Sets

- 3 sockets each in a practical storage box

Top seller!



s 17 mm (3x)
Made in Germany
903SLG-17/3
EAN-No. 4000896191697



s 19 mm (3x)
Made in Germany
903SLG-19/3
EAN-No. 4000896191734



s 17 mm · s 19 mm · s 21 mm
Made in Germany
903SPC/3
EAN-No. 4000896128754

Special profile

- Length: 87 mm





s 17 mm
• MERCEDES-BENZ
Made in Germany
905SLG-17
EAN-No. 4000896198795





s 21 mm
• KIA & HYUNDAI
Made in Germany
905SLG-21
EAN-No. 4000896201624

Wheel hub grinder

- With ½ inside square socket
- For passenger car wheel hubs up to 160 mm ∅
- Inside diameter: 75 mm ∅

1/2"



Attachment e.g. on pneumatic, cordless and corded impact wrenches



2-piece set:
– 1 base unit
– 1 grinding wheel ∅ 160 mm

4960V-160/2
EAN-No. 4000896218394

Grinding wheels (spare)

HAZET No.	∅		EAN-No. 4000896 +	
4960V-0160/3	160 mm	3	218813	

Wheel hub grinder

- 11 mm outside hexagon with 3 contact surfaces
- For passenger car wheel hubs up to 160 mm ∅
- Inside diameter: 75 mm ∅

s 11 mm



Attachment e.g. to pneumatic, cordless and corded drilling machines

4-piece set:
– 1 base unit
– 3 grinding wheels ∅ 160 mm

4960R-160/4
EAN-No. 4000896218820

Grinding wheels (spare)

HAZET No.	∅		EAN-No. 4000896 +	
4960R-0160/3	160 mm	3	218790	

Rim flange cleaner

- 11 mm outside hexagon with 3 contact surfaces
- For wheel centring diameter: at least 51 mm
- External diameter up to 160 mm ∅

s 11 mm



2-piece set:
– 1 base unit
– 1 grinding wheel ∅ 160 mm

4960F-160/2
EAN-No. 4000896218387

Grinding wheels (spare)

HAZET No.	∅		EAN-No. 4000896 +	
4960F-0160/3	160 mm	3	218806	

Tyre inflator

- Special rubber housing protects the precise manometer against light impacts
- Filling and measuring the tyre pressure
- Measuring tolerance class: 1.6 (± 0.192 bar)
- Manometer diameter: 63 mm
- Scale value in bar and psi
- Metal pressure gauge pointer for optimum readability
- Manometer measuring range: 0(0.2) - 12 bar / 0 (4) - 174 psi
- Graduation: bar (0.1) / psi (2)
- Handle with operating lever and lateral discharge knob (for one-hand use)
- Hose with plug-in nipple
- Hose length: 500 mm
- Max. pressure: 12 bar (174 psi)
- Integrated suspension hook in the handle
- Air inlet thread: 1/4" BSPT (F)
- Temperature range: -10 °C to +40 °C
- Housing made of durable POM material
- Incl. German air connection nipple with sealing ring (max. tightening torque 3.5 Nm)

Flexible hose (length: 500 mm) with plug-in nipple





NEW!

Precise manometer!



9041P-1
EAN-No. 4000896277285

Tyre inflator

- Manometer measuring range: 0–12 bar, graduation: 0.1 bar
- Max. pressure: 12 bar
- Temperature range: -20 °C to 60 °C
- Hose with plug-in nipple
- Measuring tolerance: -15°C to 25°C, 0 – 4 bar: ±0.08 bar, from 4 – 12 bar: ±0.16 bar
- Hose length: 1,000 mm



Calibrated

Recalibration possible (not carried out by HAZET)





9041G-1
EAN-No. 4000896212385

Tyre inflator, digital

- Manometer measuring range: 0–12 bar, graduation: 0.01 bar
- Max. pressure: 12 bar
- Temperature range: -20 °C to 50 °C
- Hose with plug-in nipple
- Measuring tolerance: -15°C to 25°C: ±0.1 bar
- Hose length: 400 mm



Digital






9041D-1
EAN-No. 4000896212378

Calliper gauge for brake discs / thickness gauge

- Measurement without wheel removal
- Effortless measurement on the vehicle during direct receptions in the presence of the customer
- Measuring range: 0 – 60 mm
- Length: 395 mm

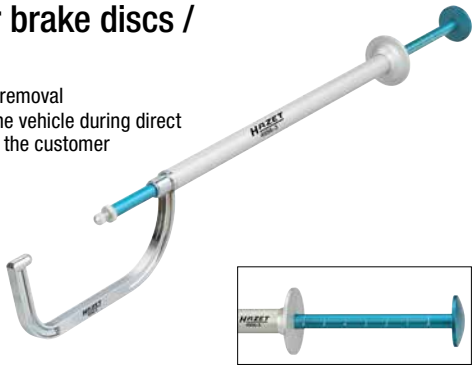

4956-3
EAN-No. 4000896219032

Brake test tool set

3

- Checking the lateral run-out of the brake disc
- Micrometer screw for exact determination of the thickness of the brake disc
- Precision dial gauge for checking the lateral run-out
- Hinged bracket with magnetic base as mounting and for an exact positioning of the dial gauge on the vehicle



4968/3
EAN-No. 4000896149179

Brake calliper file

- Blunt scraper on the face side for removing rough residues
- 12 mm wide



Made in Germany
4968-1
EAN-No. 4000896084739

Brake calliper brush

- Removing stubborn brake dust and dirt from the disc brake calliper
- Length: 225 mm



Made in Germany
4968-2
EAN-No. 4000896084821

Brass brake calliper brush

- Cleaning aluminium brake callipers
- Length: 225 mm



Made in Germany
4968-3
EAN-No. 4000896089147

Hook set

2

- Hook ∅ 7 mm
- Length: 190 mm



4968/2H
EAN-No. 4000896221820

Brake bleeding adapter set, 10-piece


NEW!

10

- Adapter set for brake fluid reservoir for brake fluid change
- For use on almost all vehicles together with conventional brake service devices
- For use on brake fluid reservoirs from model year 2001 for: **BMW · VW · AUDI · ŠKODA · SEAT · OPEL/VAUXHALL · MERCEDES-BENZ · ALFA ROMEO · BYD · MG · MINI · JEEP · LAND ROVER · MAZDA · NISSAN · HONDA · JAGUAR · PEUGEOT · PORSCHE · RENAULT · DACIA · TOYOTA · FORD · HYUNDAI · KIA · MITSUBISHI · CITROËN · INFINITY · SUBARU · BUICK · CHEVROLET · CADILLAC · CHRYSLER · DODGE · FIAT · LAMBORGHINI · MASERATI · RAM · GMC · TESLA · Volvo**
- Coupler plug: nominal size 7.2
- Extensive equipment enables use on various vehicle models
- Quick and easy installation
- Incl. universal adapter
- Adapter with partially 360° rotatable coupling plug
- Supplied in a case with operating instructions





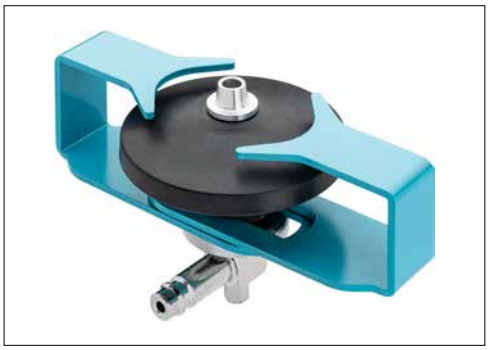

4969-3/10
EAN-No. 4000896277049







Brake piston readjusting tool for single-piston and multi-piston brake callipers

- Damage-free readjusting brake pistons (floating callipers / fixed callipers) on disc brakes
- 2-in-1 device for 1-piston and multi-piston brake callipers
- For common vehicle types without integrated locking device for handbrakes
- Working range: 15 – 90 mm
- Plate size: 1: 94 x 50 x 12 mm
- Plate size: 2: 94 x 100 x 12 mm
- Avoids damage to boots and pistons
- High accuracy as well as high stability allow continuous use




Made in Germany
4971-4
EAN-No. 4000896262922

Set of brake adapter plates for 6-piston brake callipers

2

- Plate size: 165 x 70 x 6 mm
- Magnetic trigger force: 2 kg



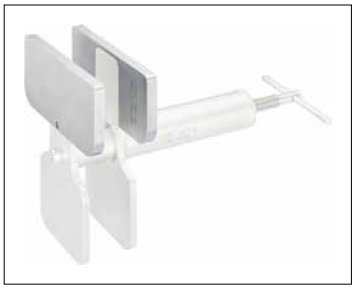


Made in Germany
4971-3/2
EAN-No. 4000896262908


Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

2-way air blow gun cone set

- For blowing out pipes, boreholes, etc. to form a seal
- Compressed air cleaning of clogged or dirty lines / hoses, e.g. fuel, air conditioning and AdBlue® lines, hydraulic lines as well as windscreen washer system and coolant lines
- Adaptable to 2-way air blow gun 9040-4 and 9040Lg-3/2 (long design)
- Loosening stuck ignition coil plugs (pneumatic inflation)
- Removal of pencil coils e.g. on 1.0 l · 1.0 l TSI · TFSI · TGI · GTI · CNG · 1.2 l TSI · 1.4 l-25 · 30 · 35 · 40 · 45 TSI · TFSI · TGI · CNG · GTE · Mild Hybrid · e-Hybrid·1.6l · 1.6 l SRE · MPI 2.0 l GTI engines
- **AUDI** A1 · A3 · A4 · A5 · Q2 · Q3
- **CUPRA** Formentor · León
- **SEAT** Alhambra · Arona · Ateca · Ibiza · León · Mii · Tarraco · Toledo
- **ŠKODA** Citigo · Fabia · Kamiq · Karoq · Kodiaq · Octavia · Rapid · Scala · Super · Yeti
- **VW** Caddy · Golf 6 → 8 · Jetta 4 → 7 · CC · Passat B8 · Polo 5, 6 · Arteon · Beetle · Taigo · Tiguan · Touran · T-Cross · T-Roc · Up! · Scirocco · Sharan · T7
- Coupler thread: 1/8" PF 28

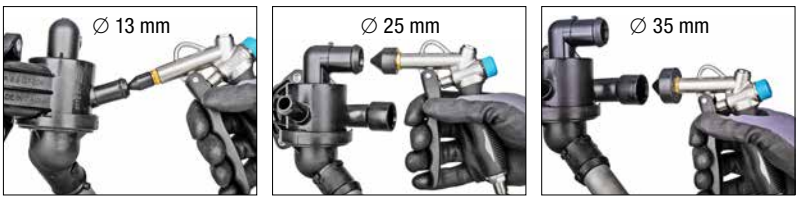

For safe cleaning with compressed air for clogged or dirty pipes/hoses thanks to cone attachment up to ∅ 35 mm

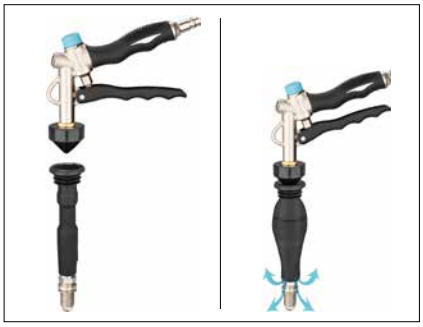



Stuck ignition coil plugs can be pneumatically inflated using the different cones, which leads to the loosening of the stuck area on the spark plug



Contents:
① Stainless steel extension 187 mm (9040-41)
② Air blow gun with long nozzle
③ Short nozzle

Set of cone nozzles, 3-piece (9040-42/3):
④ Cone nozzle ∅ 13 mm
⑤ Cone nozzle ∅ 35 mm
⑥ Cone nozzle ∅ 25 mm

9040-4/6
EAN-No. 4000896263660

Cone set, 3 pieces

- Adaptable for air blow gun 9040-4



Contents:
– Cone nozzle ∅ 13 mm
– Cone nozzle ∅ 35 mm
– Cone nozzle ∅ 25 mm

9040-42/3
EAN-No. 4000896254767

Stainless steel extension

- Low-lying and stuck ignition coil plugs can be released with the cone set
- Coupler thread (inside and outside): 1/8" PF 28
- Length: 187 mm



9040-41
EAN-No. 4000896254781

Exhaust pipe clamp pliers

- For quick opening and holding open of the reusable exhaust pipe clamps as well as for removal and installation
- The bolt and nut of the exhaust pipe clamp can remain in the clamp during work on the exhaust system thanks to the pliers design
- Application e.g. on: **CITROËN · PEUGEOT · DS · RENAULT · NISSAN · OPEL/VAUXHALL · ALFA ROMEO · FIAT · JEEP · CADILLAC · LANCIA · SUZUKI · CHEVROLET · BMW · MERCEDES-BENZ · LAND ROVER · FORD · DACIA · MAZDA · Volvo**
- Toothed fixing device and one-hand operation
- Fixing device is released by pressure lever
- Pliers tips enable secure hold of the clamp
- Length: 310 mm
- Clamping range: 50 mm



Made in Germany

4684-3
EAN-No. 4000896189205

Pipe stopper set

- Sealing pipelines in brake systems, air conditioning systems, power steering and fuel systems that cannot be secured with a flexible hose clamp
- Sealing of pipes and preventing the escape of fluids
- Sealing in sizes of 6.3 mm (1/4") · 8 mm (5/16") · 10 mm (3/8") and for double sealing (e.g. banjo connections) in size 10 mm (3/8")






4591/4
EAN-No. 4000896219650

Exhaust probe sockets

- Removal and installation of the lambda probe, particle sensor, NOX sensor and exhaust gas temperature sensor
- Double square drive 12.5 = 1/2"
- Additional hexagon drive
- Also suitable for closing the slot to avoid widening the opened hexagon
- Torque-controlled tightening possible
- Suitable for all passenger car and commercial vehicle models
- For manual operation
- Surface: phosphatized, oiled
- Dimensions: L 66 x H 39 mm
- Slot width: 8 mm





s mm

4680-10
s 20 mm
for Lambda probe/ particulate filter sensor on e.g. IVECO Stralis, S-Way

Robust design for seized exhaust probes!

Made in Germany

HAZET No.	s mm	Double drive 1/2" or	EAN-No. 4000896 +	
4680-7	14	Operation with hexagon drive *s* 24 mm	254118	
4680-8	17	Operation with hexagon drive *s* 24 mm	254132	
4680-9	19	Operation with hexagon drive *s* 24 mm	254156	
4680-10	20	Operation with hexagon drive *s* 24 mm	267026	
4680-5	22	Operation with hexagon drive *s* 30 mm	057870	
4680-6	24	Operation with hexagon drive *s* 30 mm	252268	



Special tap for exhaust gas temperature sensors / probes

TiAlN

- Professional repair, cleaning or repairing of the mounting threads of the exhaust gas temperature sensors / probes
- Guide bolt prevents jamming of the thread repair tool, thereby enabling exact repair or cleaning of the sooty or damaged thread
- Time saving: replacement of the exhaust system is no longer necessary in most cases
- No tilting or jamming during repair
- 6 cutting surfaces for optimal fitting accuracy as well as easy and quick handling
- High-quality TiAlN coating for longer service life
- Suitable for application on stainless steel components
- Drive: *s* 13 mm



Made in Germany

Thread size: M12 x 1.25

- For exhaust gas temperature sensors on: **NISSAN · RENAULT · BMW · MINI · CITROËN · PEUGEOT · FORD · HYUNDAI · KIA · DACIA · MERCEDES-BENZ · OPEL · VAUXHALL · SUZUKI · IVECO**
- Length: 55 mm

4683-12
EAN-No. 4000896253555



Thread size: M14 x 1.5

- For exhaust gas temperature sensors on: **MERCEDES-BENZ · AUDI · PORSCHE · SEAT · ŠKODA · VW · FIAT · ALFA ROMEO · LANCIA · OPEL/VAUXHALL**
- Length: 45 mm

4683-14
EAN-No. 4000896253579



Thread size: M16 x 1.5

- For exhaust gas temperature sensors on: **MERCEDES-BENZ Trucks**, Bus · **DAF** Commercial Vehicles **ACTROS · AXOR · ATEGO · MB Bus** O 500 BM382 · **DAF** CF 65 · **DAF** CF 75 · **DAF** CF 85 · **DAF** CF 105
- Length: 43 mm

4683-16
EAN-No. 4000896253593



Thread size: M18 x 1.5

- For Lambda probes on: **MERCEDES-BENZ · AUDI · PORSCHE · SEAT · ŠKODA · VW · FIAT · ALFA ROMEO · LANCIA · BMW · OPEL/VAUXHALL · CHEVROLET · DAEWOO · SUZUKI · FORD · HONDA · TOYOTA · NISSAN · Volvo · CITROËN · SAAB · SUBARU · MAZDA · MINI · MITSUBISHI · JAGUAR · ROLLS ROYCE · BENTLEY · LEXUS · PONTIAC · IVECO**
- Length: 42 mm

4683-18
EAN-No. 4000896253616



Thread size: M20 x 1.5

- For NOX sensors on: **DAF · MERCEDES-BENZ TRUCKS · IVECO · MAN · SCANIA · RENAULT TRUCKS · Volvo TRUCKS**
- Also suitable for passenger car models where a NOX sensor or particulate filter sensor with thread M20 x 1.5 is installed. e.g. **BMW · AUDI · VW · OPEL/VAUXHALL · MERCEDES-BENZ**
- Length: 50 mm

4683-20
EAN-No. 4000896253630



Thread size M22 x 1.5

- For particle sensors on: **AUDI · VW · PORSCHE · OPEL/VAUXHALL · MERCEDES-BENZ · BMW · GENERAL MOTORS · MAN**
- Length: 50 mm

4683-22
EAN-No. 4000896253654



Tool set for exhaust probes

10

10-piece set:
– Special taps: 4683-12, 4683-14, 4683-18, 4683-20, 4683-22
– Exhaust probe sockets: 4680-5, 4680-6, 4680-7, 4680-8, 4680-9

Made in Germany


163-611/10
EAN-No. 4000896257294

1/3

For commercial vehicle applications!

4683-16 Optionally available



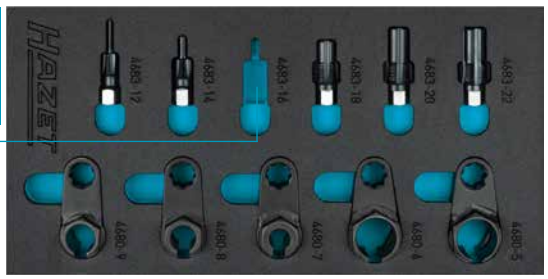

Optionally available: Toolbox for safe storage



HAZET No.	EAN-No. 4000896 +	
165-L	167777	

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

3/8" Injection line wrench

10 3/8

- Very narrow diameter *s* 14 mm ∅ 19.5 mm, *s* 17 mm ∅ 23 mm, *s* 18 mm ∅ 24.4 mm
- Operation of the union nut on the high-pressure line on the injection valve for the common rail injection system
- Proper operation of the injection line screw connection
- Also suitable for operating other line fittings with *s* 14 mm, *s* 17 and *s* 18 mm

Set

2

Contents:
– 4550-17, *s* 17 mm
– 4550-18, *s* 18 mm

Made in Germany
4550-1718/2
EAN-No. 4000896264308

∅ 24.4 mm | *s* 18 mm | 3/8″



∅ 23 mm | *s* 17 mm | 3/8″





Made in Germany
4550-14A
EAN-No. 4000896277100

∅ 19,5 mm | *s* 14 mm | 3/8″



For fuel lines on e.g. **BMW** vehicles with N55 engine


NEW!

Operating tool for fixing nut on spring strut, MERCEDES-BENZ

12.5 1/2

- Optimally matched operating tool (space conditions, loosening and tightening torques). Pay attention to the vehicle manufacturer's specifications
- Operation of the fixing nut for the spring strut on the **MERCEDES-BENZ** Sprinter Type 910 (with front-wheel drive) from model year 2018 → and E-Sprinter from model year 2020 →
- Output: *s* 106 mm
- Outside diameter: 151 mm
- Height: 49 mm

1/2″

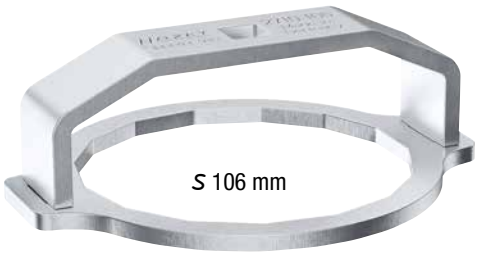

Made in Germany
2710-105
EAN-No. 4000896262946

3/8" Releasing tool for cover of coolant expansion tank, VAG

- Problem-free loosening of very tight covers on the **VAG** coolant expansion tank
- Exact fit of releasing tool avoids damage to the cover
- Narrow outer diameter and angled bracket – Optimised design of the releasing tool for very special installation conditions of the coolant expansion tank on the **VW** ID.Buzz model year 2022→, which is difficult to reach in its installation position in the front area
- For **VW** and Group vehicles as well as electric and hybrid models (MQB platform model year 2013→)
- Height: 35 mm
- Diameter: 92 mm

The original is blue!



Made in Germany
4803-2
EAN-No. 4000896262885

Unlocking tool for VAG plug connections

- Damage-free unlocking of electrical plug connections on various components and sensors
- **VAG** group plug connections, e.g. injectors, rail pressure sensors, fluid level sensors, ignition coils, vacuum sensors, brake wear sensors, pressure regulators and lighting systems
- **SCANIA · MAN** TGE / TGX from model year 2020



• Head offset: 20 mm

Made in Germany

HAZET No.	Length mm	EAN-No. 4000896+	
4675-1	130	244331	
4675-2	191	244348	

Extra-long blade, curved at the head allows access to hard-to-reach places!

1/4" Screwdriver joint socket XZN

6.3 1/4

- Operation of the fastening screws of the 4/2 way valve with coolant regulator (note: coolant regulator is located inside the coolant pipe and cannot be renewed individually)
- With hinge for use in hard-to-reach places and to bypass interfering edges: fastening screws are located behind the oil filter and cannot be reached in a straight line
- Application e.g. on: 4-cylinder diesel engine (2.0 l common-rail): **AUDI · SEAT · ŠKODA · VW**
- Output: internal serration profile XZN M8



1/4″



Made in Germany
2548G-XZN8
EAN-No. 4000896252701

Detailed information

Pneumatic injector extractor

24

- For removing stuck diesel injectors
- 21 different adapters and a universal claw can be used to gently loosen stuck diesel injectors without much effort. Depending on the injector version, the piezo element must be removed for this purpose
- This prevents damage to the cylinder head/cylinder head cover due to high forces from supports



24-piece set, contents:
- Pneumatic diesel injector extractor
- Extension for deep-seated injectors or installed installation spaces
- Universal claw
- 21 adapters:
  M17 x P1.0 for **BOSCH** 110
  M18 x P 0.75 for **BOSCH** 120, M20 x P 1.0 for **DENSO** / **A**
  Adapter with inside thread M12 x P 1.5 / outside thread M20 x P 1.5
  M14 x P1.5 for **DELPHI**
  M16 x P1.0 for **TOYOTA**
  M18 x P1.5, M8 x P1.0, M8 x P1.25, M10 x P1.0 **Universal adapter**
  M14 x P1.5, M14 x P1.0, M25 x P0.5 for **DENSO**
  M25 x P1.0 for **SIEMENS**
  M27 x P0.75 for **BOSCH** / **FIAT** / **BMW** / **PSA** / **MERCEDES** / **RENAULT**
  M27 x P1.0 for complete thread for **SIEMENS**
  M29 x P1.0 for **DELPHI**
  M31 x P0.75 for **BOSCH** CRIN 1
  M26 x P0.75 for **BOSCH** CRIN 2



9098/24
EAN-No. 4000896258086

Injector adapter set, 4-piece

4

NEW!

- Adapters are used when the injector claw cannot be used, either because of the vehicle type or because of a lack of space
- Thread sizes: outside thread M25x1 • outside thread M16x1 • outside thread M27x1 • inside thread M25x0.75

Contents:
- **9098-B7** (outside thread M25x1; inside thread M14x1.5) for SIEMENS, SIEMENS-VDO (CONTINENTAL) injectors e.g. **PSA • VW • AUDI • SEAT • ŠKODA**
- **9098-C6** (outside thread M16x1.0; inside thread M14x1.5) for **DENSO** injectors e.g. **TOYOTA • LEXUS RENAULT • OPEL/VAUXHALL**
- **9098-B8** (outside thread M27x1.0; inside thread M14x1.5) for SIEMENS, SIEMENS-VDO (CONTINENTAL) e.g. **PSA • FIAT • PEUGEOT • CITROËN • MERCEDES-BENZ**
- **9098-D7** (inside thread M25x0.75; inside thread M14x1.5) for **DENSO** injectors e.g. **TOYOTA • LEXUS • FIAT • PSA**



Made in Germany
9098/4
EAN-No. 4000896277728

Injector removal adapter

NEW!

- Adapter for dismantling injectors on: **VAG** vehicles with 1.6 and 2.0 l TDI engines from 2004 **FORD** EcoBlue 2.0 engines from model year 2022 2.0 l diesel

- Extension for compressed air injector sliding hammer 9098/24
- For disassembly of tight common rail injectors without removing the cylinder head



- For common-rail injectors of **VAG/ FORD** engines
- For **BOSCH** (piezo and magnetic types) • **DELPHI** • **DENSO** • **VDO injectors**
- Drive lateral, inside thread: M14x1.5
- Output inside thread: M14x1.5
- Fixing screw hexagon: *s* 17 mm • ∅ 21.8 mm
- Length: 70 mm



Made in Germany
9098-H3
EAN-No. 4000896277827

Injector ball joint adapter

NEW!

- Ball joint adapter enables the sliding hammer to be used even where installation space is limited by bypassing interfering components and flexibly deflecting the direction of impact by up to 20° to the side
- Drive: M14x1.5
- Output: M14x1.5
- Angular movement: up to 20°
- Diameter: 35 mm
- Length: 69 mm
- Wrench size: *s* 32 mm






Made in Germany
9098-F2
EAN-No. 4000896278725

Injector adapter

NEW!

- Adapter enables use of HAZET injector claws 4797-2 and 4797-9 as well as external adapter 4797-3 with HAZET compressed air injector extractor 9098/24
- Drive inside thread: M14x1.5
- Output outside thread: M16x1.5
- Outside hexagon: *s* 22 mm
- Length: 42 mm





Made in Germany
9098-F3
EAN-No. 4000896277629

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Adapter set for clamping screw on VW / AUDI multi-link axle

- Removal of the clamping screw on **VW/AUDI** multi-link axles possible without effort
- If space permits, the HAZET compressed air **injector extractor 9098/24** can be used to remove the screw on the **VW/AUDI** multi-link axle
- For **AUDI** A4/A6/Q5/Q7 (all model years)
- **VW** Passat 3B (from 1996 → 2001), **VW** Touareg from 2010 to today
- Compatible with all four-link axles (except **AUDI** A6/ 4F series 2004 → 2008)

Contents:

- **9098-F4**
  – Length: 40 mm, width: 30 mm, opening / fork width: 12 mm
- **9098-F5**
  – Drive inside thread: M14x1.5, outside *s* 22 mm
  – Output inside thread: M10x1.5, ∅ 17 mm
  – Surface: burnished



3

NEW!



Made in Germany
9098-F45/3
EAN-No. 4000896277704

Universal spreader


- Universal application due to wide spreading range 5 – 11.5 mm
- Expansion of the spring strut and ball joint mounting (separating the spring strut from the wheel bearing housing)
- Optimised end stops with inspection window
- Drive with 1/4" holder for overload protection
- For manual operation
- Dimensions: L 60 x H 30 x D 24 mm




Large spreading range 5 – 11.5 mm



Top Seller!

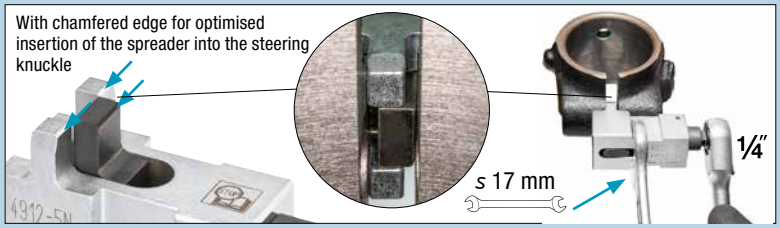



Made in Germany
4912-5N
EAN-No. 4000896249312

1/2" Special screwdriver socket set

12.5 1/2"

2

- Operation of wheel bearing screw connection in the aluminium housing on **AUDI** and **VW** vehicles as well as **SEAT** and **ŠKODA**
- Enables loosening of the wheel bearing bolts without removing the drive shaft and ball joint – time saving: approx. 35 min.
- Taper on the shaft allows it to get past the drive shaft joint
- Ideal for confined spaces
- Blade with TiN coating
- 2 lengths available for 4-link axle and McPherson spring struts
- Output: internal serration profile XZN M12
- For manual operation

TiN



2584k-12, short design

M12




1/2"

2584l-12, long design

M12



1/2"



2584k-12, short			**2584l-12,** long		
l_1 mm	l_2 mm	d mm	l_1 mm	l_2 mm	d mm
41	74	23	81	114	23

Made in Germany
2584-12/2
EAN-No. 4000896252640

3/8" Drive shaft screwdriver socket

10 3/8"


- Actuation of the stub shaft on **AUDI** and **VW** vehicles as well as **SEAT** and **ŠKODA**
- Loosening and tightening of the fastening screws on the heat protection plate when removing the drive shaft
- Universal use for deep screw connections
- Can also be used for gearbox repair
- Torque-controlled screw tightening, e.g. with HAZET 5110-3CT possible (Please follow the manufacturer's specifications)
- Extra long design
- Output: inside hexagon profile
- For manual operation



s 6 mm



3/8"



l_1 mm	l_2 mm	d mm
332	359	19

Made in Germany
2584LG-1A
EAN-No. 4000896252817

Universal inside spring vice set

- Installation and removal of the coil spring on the rear axle
- Pendulum hexagonal head for equal force distribution with integrated anti-rotation protection for upper tensioning jaws
- One-sided counterholder for the spindle made possible by hexagon on top, e.g. with combination wrench HAZET 600 N-13
- Removal and installation of springs with small coil pitch, e.g. for **MINI** Cooper S (third generation), **VW** Passat (B8)
- Extension of the span to 120 mm and an increase of the maximum load for increasing vehicle weights (electric and hybrid vehicles), for safe working up to 31,000 N → Tested with at least four-fold safety against breakage (GS mark of tested safety)
- 17° swivel angle of the tensioning jaws now ensures the removal of C-shaped (bent) springs, e.g. on **AUDI** A4 (B9), **VW** Golf 7
- Internal and external guidance of the tensioning jaws prevents the spring from sliding out
- All tensioning jaws included, reusable, replaceable plastic protective pads

6-piece set, contents:
– 1 inside spring vice 4904-1
– 1 tensioning jaw 4904-10 · span 64 – 115 mm
– 1 tensioning jaw 4904-11 · span 64 – 115 mm
– 1 tensioning jaw 4904-12 · span 79.5 – 133 mm
– 1 tensioning jaw 4904-13 · span 79.5 – 133 mm
– 1 tubular box wrench 4902-224 · s 24 mm



Only 202 mm long!








Universal application on almost all passenger cars!







Made in Germany
4904/6
EAN-No. 4000896238897

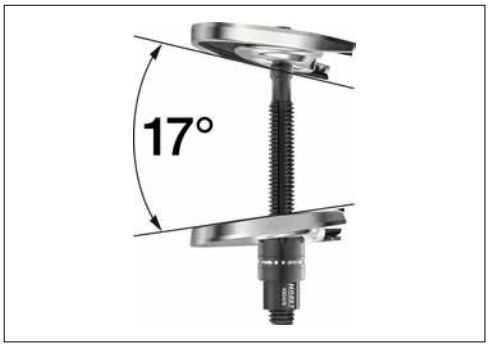

Highlights:

- Easy handling for just one user
- Eliminates time-consuming work associated with most spring removal:
  – Removal of axle parts unnecessary
  – Axle alignment no longer necessary
  – Removal and installation possible in just a few minutes on each side
- Conclusion: Compact design enables spring replacement with remarkable time savings








Support device

- Prevents unwanted raising of the suspension during the spring tensioning process
- Can be used on almost all vehicles – helpful on vehicles with multi-link axle
- Protective pads prevent damage to the vehicle parts
- Facilitates removal of rear axle springs
- Safety: visual chain provides a reminder for tool removal
- Use together with universal inside spring vice set 4904/6
- Clamping range: 80 – 127 mm
- Pressure piece diameter: 30 mm
- Chain length: 750 mm

Supplement to 4904/6

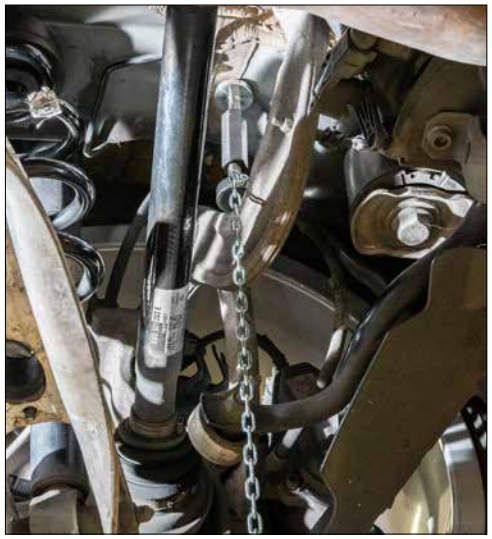



Made in Germany
4912-6
EAN-No. 4000896238835

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Stationary universal spring vice set

Innovative mounting and installation concept

- Swivelling in horizontal or vertical working position
- HAZET recommendation for ergonomic working height: adjust vertically, operate horizontally
- Damage to shock absorbers and head plates impossible (no overload risk)
- Simple, lockable strut mount

High safety

- Consistently reliable mounting of head plates
- Thread damage to piston rod impossible
- Permanent fixation of spring throughout operation

Secure investment by using existing components of SYSTEM 4900

- Existing basic units 4900-2 A and all tensioning jaws of System 4900 may be used
- Use of future applications is assured

Allows record keeping by scaling

- If recurring, significant time savings by scaling
- Firm fixation eliminates readjustment at the same spring strut (left/right)

4 pieces, contents:

– Safety spring vice, basic unit 4900-2A
– Base support 4903-1
– Universal clamping disc, adjustable 4903-2
– Universal tensioning jaw 4903-3, adjustable, including safety adapter





4 steps to success

- Mount strut on clamping disc above gripper and spring-loaded brake
- Grip spring with universal tensioning jaw
- Operate the spring vice with reversible ratchet, cordless screwdriver or air ratchet
- Remove shock absorber load-free and install new one (then reverse order)

4903/4 4903/4 (W203)

Made in Germany
4903/4
EAN-No. 4000896180561

Safety spring vice set

- Installing and removing the coil spring when replacing shock absorbers
- Suitable for impact wrenches
- Suitable for around 100 different vehicle types
- Closed system – maintenance-free
- Variable system thanks to easily replaceable tensioning jaws
- Location bar for machinist's vice
- Maximum span: 309 mm

5 pieces, contents:

– Base support 4900-2A
– 2 tensioning jaws 4900-11
– 2 tensioning jaws 4900-12



Made in Germany
4900-2A/5
EAN-No. 4000896086054

Tool finder

Shock absorber tool set

- Repair work in the spring strut e.g. shock absorber, strut mounting, coil spring
- Retaining the piston rod when removing and installing the spring strut
- Attention: Follow vehicle manufacturer's specifications concerning torque tightening values
- Use with torque wrench e.g. HAZET 6291-1 CT together with insert box-end wrench 6630D-21
- Application of an impact wrench may damage the thrust bearing and the piston rod
- For manual operation





Made in Germany
4915/15
EAN-No. 4000896179213

12-piece cordless tool set

HAZET

+ FREE!
Service trolley 167-3S

Detailed information

13

167-3S/13
EAN-No. 4000896273263

Assistent®
Made in Germany
167-3S


9579-10


9512-950


9530-10


179N-56
Made in Germany


179N-55
Made in Germany


9500-025


9534-10


9501-1018


3x 9500-05


9533-10

Valid from 1 March 2026 until 28 February 2027 at the latest.
Errors excepted.

Your HAZET specialist dealer:

4 000896 279753
SWW26/EN/XX/01. 02.2026 / 2. JK/MD

We accept no liability for printing errors! All rights reserved regarding technical modifications and errors, images may not always correspond to originals and are thus non-binding!
© 2026

Copyright 2026 ©
HAZET-WERK Hermann Zerver GmbH & Co. KG
Güldenwerther Bahnhofstraße 25 – 29,
D-42857 Remscheid, Germany