SPECIAL 2026/2027
WORLDWIDE

New Products and Specials

HAZET®

Das Werkzeug



SWW2627/EN/XX/0

Valid from 1 September 2026
until 28 February 2027
at the latest.
Errors excepted.

HAZET

Made in Germany

PLEASE WELCOME OUR NEWCOMER:

Assistent® 175

NEW!

- Powerful
- Reliable
- Durable
- Robust powder-coated stainless steel work surface



7 drawers
- 5x flat: 79 x 569 x 398 mm
- 2x high: 164 x 569 x 398 mm

Made in Germany

175-7

EAN-No. 4000896282524

8 drawers
- 7x flat: 79 x 569 x 398 mm
- 1x high: 164 x 569 x 398 mm


Made in Germany

175-8

EAN-No. 4000896283040

Total loading capacity (dynamic): 480 kg · Total loading capacity (static): 650 kg · Loading capacity per drawer: 30 kg · Net weight (kg): 73.5 kg

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

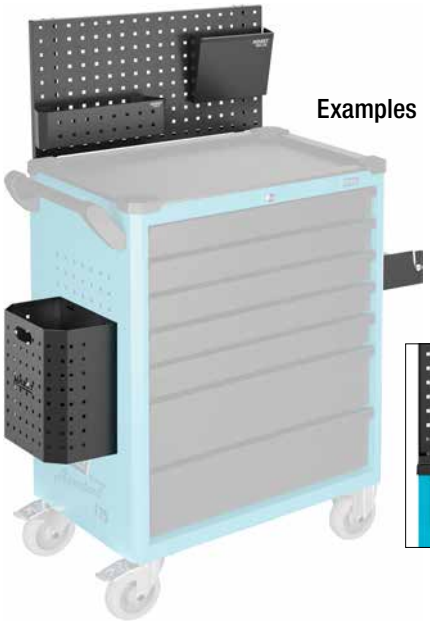





ACCESSORIES

- Various fastening possibilities for numerous accessories

HAZET No.	Designation	EAN-No. 4000896 +	
112/11	Tool holder, 11 pieces	104239	
161N-3D/2	Cable drum with holder	237654	
179-35	Can holder for 3 cans	141074	
179N-33	Paper bin	236206	
179N-35	Can holder, for at least 4 cans	224258	
179N-45	Tablet holder	224210	
180-24	Document holder	110827	
176N-26	Perforated tool board	265633	

CUSTOM COLOURS ON REQUEST:

- **Numerous colour customisations**, such as:
  Work surface · Body · Drawers (also individual)
- Even from a production of one tool trolley
- 24 RAL colours can be implemented at short notice
- Other colours on request

Colour examples











163-398x50



LARGEST DRAWER VOLUME IN ITS CLASS!


- Expansion of our soft foam insert portfolio
- New insert, empty, 163-398 x 50 (W x L: 50 x 398 mm)

163-398x50
EAN-No. 4000896284320


NEW!

Equipment options:

3/3+
W x L: 519 x 398 mm
and 163-398 x 50



3/3L+
W x L: 569 x 398 mm



Price on request

Made in Germany

Automotive "All-in-One" assortment

NEW!

NEW INSERTS!

3/3L+

175-7/452: Includes tool trolley "Assistent" 175-7 and 452 expert tools

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")


Assortment

175-7/452
EAN-No. 4000896285129


Robust, powder-coated sheet steel work surface



163-690/230 6.3 ¼" 10 ⅜" 12.5 ½" 6.3 ¼"

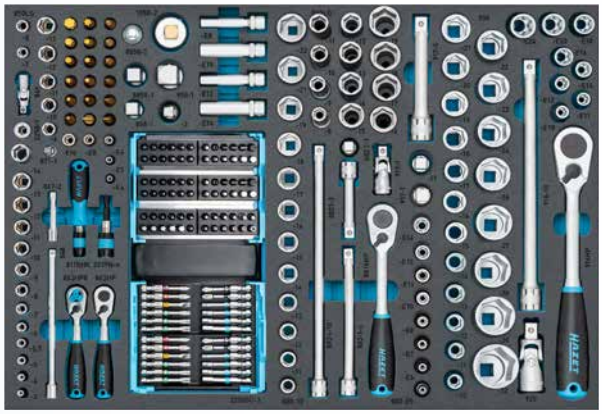

163-692/75 6.3 ¼" 10 ⅜" 12.5 ½"

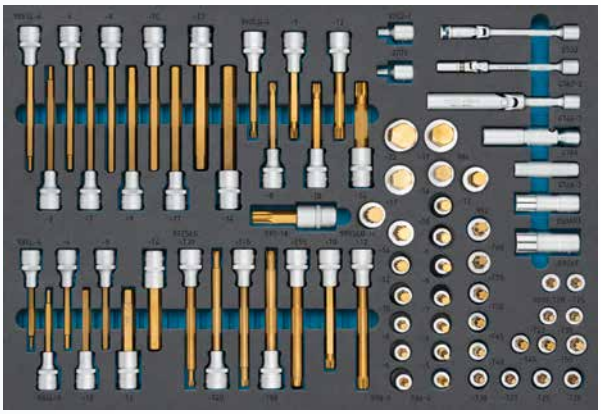

Highlights of the new inserts:

in the Automotive "All-in-One" assortment

Made in Germany

Torque wrench
5110-3CT 10 – 60 Nm
5122-3CT 40 – 200 Nm

SYSTEM **5000-3 CT**

10 ⅜" 12.5 ½"



in the Automotive "All-in-One" and "Universal" assortments

Made in Germany

Incl. grip pliers wrench
762-15 clamping range: 33 mm
762-26 clamping range: 56 mm



Automotive "Universal" assortment

NEW!

NEW INSERTS!


175-7/326: Includes tool trolley "Assistent" 175-7 and 326 expert tools

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")

Assortment

175-7/326
EAN-No. 4000896284580

163-690/230 6.3 ¼" 10 ⅜" 12.5 ½" 6.3 ¼"

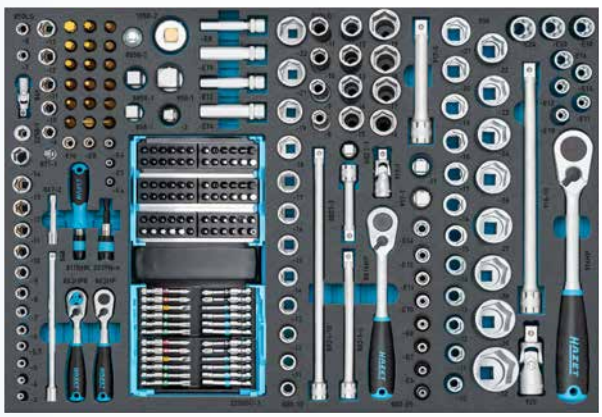

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

163-672/46 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm



163-691/2
762-15
762-26

163-697/48



452

163-693/16 6.3 ¼ 12.5 ½ 12.5 ½ 760-15 · 760-26



163-698/35 12.5 ½



Automotive "All-in-One" assortment

Made in Germany

Including spark plug/
glow plug socket



Current clamp meter
digital
2152-610





1/4" · 3/8" · 1/2"
adapter set for
ratcheting combination wrench
606/4SPC





163-672/46 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm



163-691/2
762-15
762-26

163-697/48



326

Automotive "Universal" assortment

Industry "All-in-One" assortment

NEW!

NEW INSERTS!

3/3L+

175-7/417: Includes tool trolley "Assistent" 175-7 and 417 expert tools

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")

Assortment

175-7/417
EAN-No. 4000896285068


Robust, powder-coated sheet steel work surface



163-694/204 6.3 ¼" 10 ⅜" 12.5 ½" 6.3 ¼"



163-695/77 6.3 ¼" 10 ⅜" 12.5 ½"

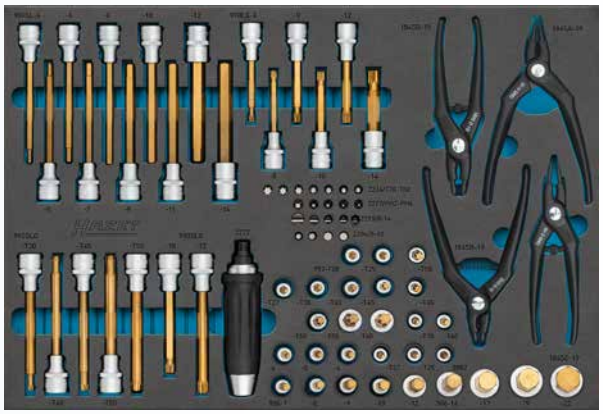

Highlights of the new inserts:

in the Industry "All-in-One" assortment:

Made in Germany
Torque wrench
5108-3CT 2.5 – 25 Nm
5121-3CT 20 – 120 Nm

SYSTEM **5000-3 CT**

6.3 ¼" 12.5 ½"



in the Industry "All-in-One" and "Universal" assortments:

Made in Germany
Incl. grip pliers wrench
762-15 clamping range: 33 mm
762-26 clamping range: 56 mm



Industry "Universal" assortment

NEW!

NEW INSERTS!

175-7/300: Includes tool trolley "Assistent" 175-7 and 300 expert tools

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")

Assortment

175-7/300
EAN-No. 4000896285082

163-694/204 6.3 ¼" 10 ⅜" 12.5 ½" 6.3 ¼"



Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

163-672/46 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm



163-691/2
762-15
762-26

163-697/48



417

163-696/11 6.3 ¼" 12.5 ½" 760-15 · 760-26



163-699/29



Industry "All-in-One" assortment

8 5/16



Impact bit screwdriver
2272
Up to 80 Nm loosening
or tightening torque



Current clamp meter
digital
2152-610





1/4" · 3/8" · 1/2"
adapter set for
ratcheting combination wrench
606/4SPC





163-672/46 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm



163-691/2
762-15
762-26

163-697/48



300

Industry "Universal" assortment

ROBUST WORK SURFACE IN CARBON DESIGN!

NEW!

Made in Germany



179NXXL-7S2/353 including 352 expert tools and service trolley 167-3NS2

353

163-481/194N



163-511/4





163-646/61 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm · 762-15 · 762-26



163-382/3





With additional drawer!

4/3+

Free!

163-480/57N



163-510/8



5/3+

Assortment

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")

179NXXL-7S2/353
EAN-No. 4000896281824

Including 2128N-1



Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

179NXL-8S2/428 including 427 expert tools and service trolley 167-3NS2



NEW!

With additional drawer!

4/3+

Free!

All drawers powder-coated in anthracite grey!



4/3+


Assortment

Including HiPer
90 teeth · 4° ·
1000 Nm (1/2")

179NXL-8S2/428

EAN-No. 4000896281848

163-652/231

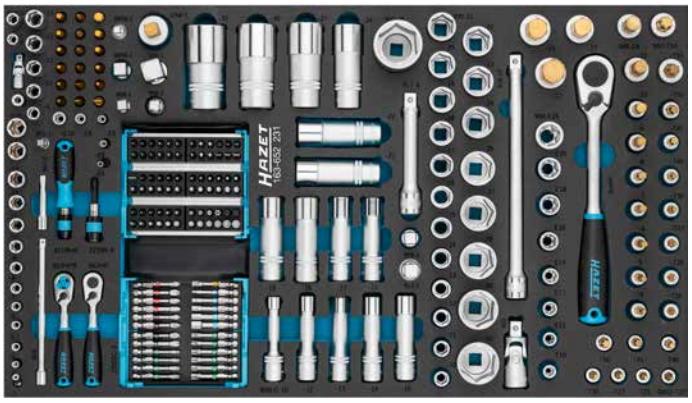


163-382/3



163-172 x 50



163-675/45

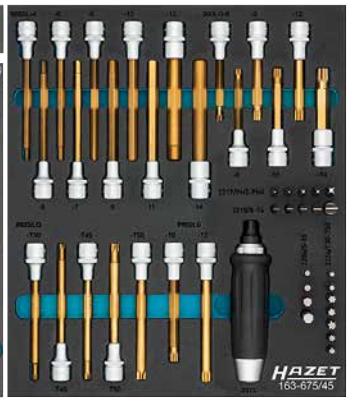

163-124/4

163-646/61 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm · 762-15 · 762-26



163-480/57N



163-479/26



179NX-8S2/321 including 320 expert tools and service trolley 167-3NS2



NEW!

With additional drawer!

4/3+

Free!

All drawers powder-coated in anthracite grey!



163-513/122N






163-672/46 s 6x7 – 34x36 mm · s 6 – 32 mm · s 8 – 19 mm



Including HiPer 90 teeth · 4° · **1000 Nm** (1/2")

Assortment

163-609/61

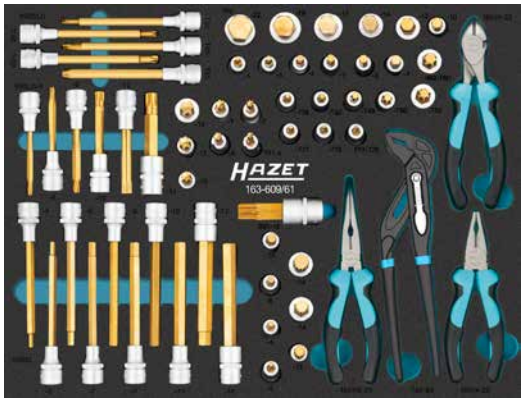

163-526/41N



163-372/25



3/3+

179NX-8S2/321

EAN-No. 4000896281862

Including 2128N-1



Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

Our classic now with a lockable drawer


- 100% sliding-out with ball-bearing telescopic rails
- Position of the middle tray can be freely selected
- Ball-bearing wheels, ∅ 100 mm, 2 swivel castors (1 with dual brake), 2 fixed castors
- "Non-marking" castors leave no marks on the floor and enable smooth running
- Sturdy handle, firmly attached to the body
- For HAZET Safety-Insert-System
- Total loading capacity (dynamic): 150 kg
- Total loading capacity (static): 150 kg




Drawer loading capacity: 30 kg, loading capacity per tray up to 50 kg

NEW!


Drawer suitable for 4/3+ insert




Suitable for 3/3+ (2x) inserts per tray





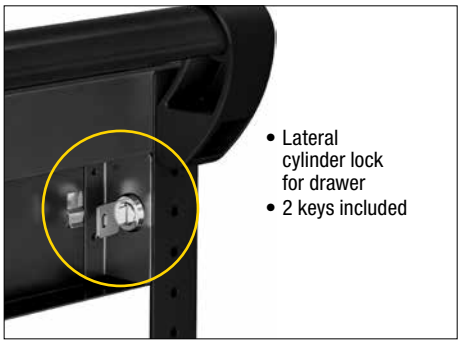

- Lateral cylinder lock for drawer
- 2 keys included

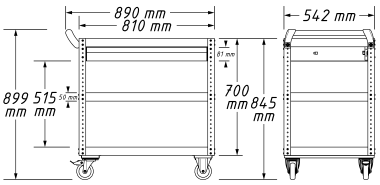


Slate grey line: Anthracite grey RAL 7016

Made in Germany

167-3NS2

EAN-No. 4000896281923



With additional flat drawer for HAZET 4/3+ soft foam inserts

Order now!

Matching anti-slipping mats

- 1x mat suitable for drawer (4/3+)
- Dimensions: 694 x 395 mm

173-38

EAN-No. 4000896089789

- 2x mats suitable for work surfaces (3/3+)
- Dimensions: 529 x 394 mm

180-38

EAN-No. 4000896120819




Price per piece

NEW!




Drawer loading capacity: 30 kg, loading capacity per tray up to 50 kg

Drawer suitable for 4/3+ insert



Suitable for 3/3+ (2x) inserts per tray







- Lateral cylinder lock for drawer
- 2 keys included



HAZET blue

Made in Germany

167-3N

EAN-No. 4000896281886









Now new:
50% more slender!

Disassembly of a ball bearing from the differential gear of a **TESLA** model S/X Large Drive Unit (LDU) using the **HAZET 2- or 3-arm puller** with particularly slim hooks

Puller sets

- 2-arm crossbar, 186 mm wide (clamping range: min. 35 mm / max. 140 mm)
- 3-arm crossbar, 170 mm wide (clamping range: min. 30 mm / max. 125 mm)
- 3 hooks each, with usable lengths of 110, 145 and 195 mm and a hook width of 27 mm
- Spindle tip: rotating centre point

Slender forged hooks with 2.5 mm gripping depth

NEW!

Puller set, 7 pieces

- 6 slender forged hooks in 3 different lengths
- 2 hooks each
- Crossbar width: 186 mm

2-arm crossbar



7 NEW!

Made in EU
1751/7
EAN-No. 4000896283385

Puller set, 10 pieces

- 9 slender forged hooks in 3 different lengths
- 3 hooks each
- Crossbar width: 170 mm

3-arm crossbar



10 NEW!

Made in EU
1761/10
EAN-No. 4000896283408

All in one set!



Puller set 12 pieces

- 9 slender forged hooks in 3 different lengths
- Crossbar width 170 mm (3-arm) – 186 mm (2-arm)

Extensive set for all standard clamping widths and depths, including plastic box



12 NEW!


Made in EU
1765/12
EAN-No. 4000896283422



Universal puller, 2-arm, 4-way adjustable

- Very slender puller hooks with four clamping depth adjustments
- Robust, drop-forged design
- Long hooks for removing stuck parts, such as bearings, sprockets or pulleys
- Crossbar width: 80 mm
- Spindle tip: fixed centre point
- Clamping range: 220 mm
- Usable clamping depth: 210 mm
- Spindle drive: 17 mm outside hexagon



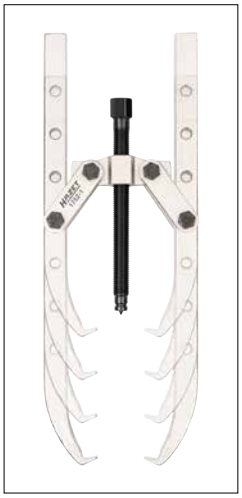





Slotted gripper arms for extracting screws and workpieces with bolts

NEW!

Made in EU
1752-1
EAN-No. 4000896283446

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.



1/4“ · 1/2“ HiPer fine-tooth reversible ratchet set

6.3 1/4" 6.3 1/4" 3

NEW SET!


- Set consisting of 1x 916HP and 2x 863HP
- **Maximum power, almost double DIN**
  – 916HP: **1.000 Nm, DIN 512 Nm**
  – 863HP: **120 Nm, DIN 62 Nm**
- Ultra-precise: 90 teeth, 4° operating angle for restricted installation spaces
- Developed and produced by HAZET "Made in Germany"



Made in Germany
916HP/3N
EAN-No. 4000896281725





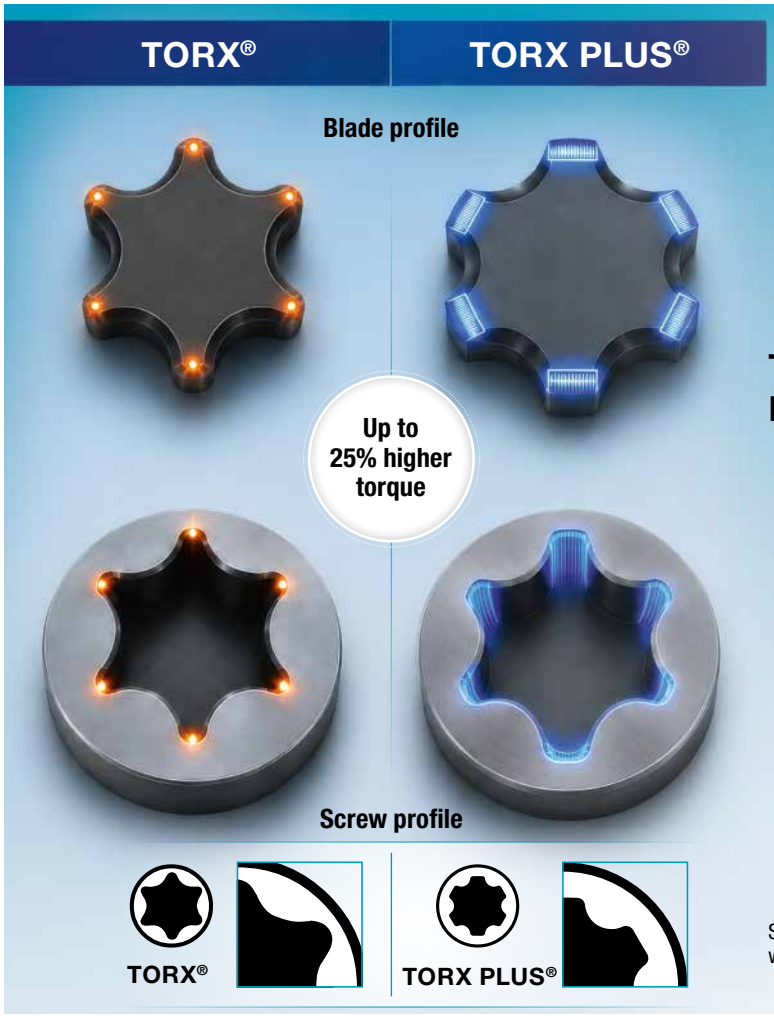


TORX PLUS® has larger and flatter edges as well as an enlarged contact surface compared to TORX®. This means more torque can be transferred, the risk of slipping is reduced, and tool and screw wear are reduced.

NEW!

- Optimal force distribution due to flatter edges
- Precise, stable traction
- No cam-out – Full control[1]
- Significantly longer service life


TORX PLUS® EXAMPLES OF APPLICATION:

- **Automotive:**
  VW Amarok cardan shaft (TORX PLUS® 45IP)
  FORD Transit MK8, **FORD** Focus, e.g. seat belt anchor, seat belt buckles on vehicle floor (TORX PLUS® 55IP)
- **Industry:**
  CNC machines on milling heads, turning tools, drill bits. For securing the turning plates (TORX PLUS® 8IP · 10IP · 15IP)
- **Bike:**
  Motor mounting for the **BOSCH** Performance Line CX electric motor GEN 4/5 on the bicycle frame (TORX PLUS® 40IP) with tightening torque: 20 Nm
- **Aviation:**
  Maintenance access points/maintenance flaps, e.g. **BOEING** 787 Dreamliner (TORX PLUS® 27IP) or on the lighting system for Wing, Taxi, Nose Turnoff Lights (TORX PLUS® 8IP)

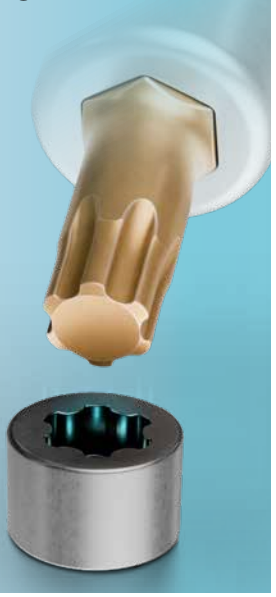

See the respective product detail page at www.hazet.de for more information

[1] Cam-out effect – refers to the unwanted slipping of the screw driving tool from the screw head while driving a screw



1/4" · 3/8" · 1/2" screwdriver socket

TiN

6.3 1/4" 10 3/8" 12.5 1/2"

Made in Germany

HAZET No.	Drive	s mm	l_1 mm	l_2 mm	d mm	EAN-No. 4000896 +
8509-8IP	6.3 1/4"	8IP	1.2	28	12	282869
8509-10IP	6.3 1/4"	10IP	1.4	28	12	282883
8509-15IP	6.3 1/4"	15IP	1.7	28	12	282906
8509-20IP	6.3 1/4"	20IP	2.0	28	12	282920
8509-25IP	6.3 1/4"	25IP	2.3	28	12	282944
8509-27IP	6.3 1/4"	27IP	2.6	28	12	282968
8509-30IP	6.3 1/4"	30IP	2.9	28	12	282982
8509-40IP	6.3 1/4"	40IP	3.5	28	12	283026



1/4"

8809-20IP	10 3/8"	20IP	17	43.5	19	282722
8809-25IP	10 3/8"	25IP	17	43.5	19	282746
8809-27IP	10 3/8"	27IP	17	43.5	19	282760
8809-30IP	10 3/8"	30IP	17	43.5	19	282784
8809-40IP	10 3/8"	40IP	17	43.5	19	282807
8809-45IP	10 3/8"	45IP	17	43.5	19	282821
8809-50IP	10 3/8"	50IP	17	44.5	19	282845



3/8"

999-30IP	12.5 1/2"	30IP	17	55	23	282609
999-40IP	12.5 1/2"	40IP	17	55	23	282623
999-45IP	12.5 1/2"	45IP	17	55	23	282647
999-50IP	12.5 1/2"	50IP	17	55	23	282661
999-55IP	12.5 1/2"	55IP	18	56	23	282685
999-60IP	12.5 1/2"	60IP	18	56	23	282708



1/2"






Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

6.3 ¼" 10 ⅜" 12.5 ½" | 1/9 | 21 | NEW!

1/4" · 3/8" · 1/2" screwdriver socket set


- **Contents:**
  – 8509-8IP, -10IP, -15IP, -20IP, -25IP, -27IP, -30IP, -40IP
  – 8809-20IP, -25IP, -27IP, -30IP, -40IP, -45IP, -50IP
  – 999-30IP, -40IP, -45IP, -50IP, -55IP, -60IP

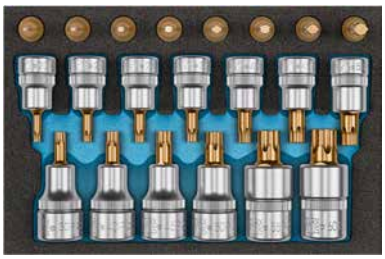

6.3 ¼" 12.5 ½" | 1/9 | 14 | NEW!

1/4" · 1/2" screwdriver socket set

- **Contents:**
  – 8509-8IP, -10IP, -15IP, -20IP, -25IP, -27IP, -30IP, -40IP
  – 999-30IP, -40IP, -45IP, -50IP, -55IP, -60IP

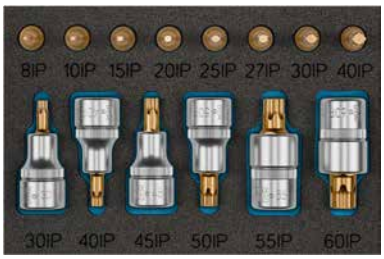

Order now!

Made in Germany
163-685/21
EAN-No. 4000896283842

Tool box
for safe storage
- For 1/9 soft foam inserts
- Pushbutton for easy opening
- Pull-out kickstand for fast and ergonomic tool access
- L x W x H: 185 x 153 x 52 mm



Made in Germany
165-S
EAN-No. 4000896167784

Made in Germany
163-686/14
EAN-No. 4000896283828





6.3 ¼" | 8 | NEW!

1/4" screwdriver socket set

- **Contents:**
  – 8509-8IP, -10IP, -15IP, -20IP, -25IP, -27IP, -30IP, -40IP



Made in Germany
163-687/8
EAN-No. 4000896283804

10 ⅜" | 7 | NEW!

3/8" screwdriver socket set

- **Contents:**
  – 8809-20IP, -25IP, -27IP, -30IP, -40IP, -45IP, -50IP



Made in Germany
163-688/7
EAN-No. 4000896283781

12.5 ½" | 6 | NEW!

1/2" screwdriver socket set

- **Contents:**
  – 999-30IP, -40IP, -45IP, -50IP, -55IP, -60IP



Made in Germany
163-689/6
EAN-No. 4000896283767

RIBE-CV

RIBE-CV
- High torque transmission
- Uniform distribution of force
- Low wear
- High repetition accuracy during assembly processes

Application
- Automotive industry, e.g. engines, gearboxes, safety-relevant screw connections
- Industrial applications, such as machine construction, automated manufacturing / robot assembly


1/2" screwdriver socket

1/2" · 7 · NEW!

- Short design
- With knurling
- **Contents:** 991-6, -7, -8, -9, -10, -12, -14







TiN



Made in Germany

HAZET No.	Drive	s mm	l_1 mm	l_2 mm	d mm	EAN-No. 4000896 +
991-6	1/2"	M6	25	63	23	047451
991-7	1/2"	M7	25	63	23	132799
991-8	1/2"	M8	25	63	23	047468
991-9	1/2"	M9	25	63	23	132812
991-10	1/2"	M10	25	63	23	047406
991-12	1/2"	M12	25	63	23	047413
991-14	1/2"	M14	25	63	24.6	047420

Made in Germany

163-700/7

EAN-No. 4000896285143

Polydrive

Polydrive
- Very high loading capacity
- Long service life
- High power transmission
- Low risk of damage


Application
- Automotive industry, e.g. cylinder head bolts, engine screw connections, crankshaft screw connections, gearbox components
- Industrial sector, e.g. automated screwing processes, robot assembly lines, series production

1/2" cylinder head screwdriver socket

1/2"

- Operation of: Polydrive cylinder head bolts on **VW** engines (**VW** · **AUDI** · **SEAT** · **ŠKODA**) and **FORD** 1.0 EcoBoost engines





l_1 mm	l_2 mm	d mm
130	168	23



M 10

Made in Germany

2579-9

EAN-No. 4000896086931

Tool set

- Set of 15 pieces in sturdy textile bag

- **Contents:**
  - Grip pliers wrench 762-15
  - 1/4" ratcheting bit screwdriver with integrated magazine 811R-4
  - 12 bits
  - High-quality bag





6.3 · 1/4" · 15 · NEW!



- Clamping range: 33 mm
- Length: 150 mm

The perfect gift!

Incl. 12 bits

	1/4"	0.8 x 5.5 mm
	1/4"	PH2 · PH3
	1/4"	s 3 · 4 · 5 · 6 mm
	1/4"	T15 · T20 · T25 · T27 · T30

811R/15

EAN-No. 4000896285365

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

Precision that inspires!



1/4" torque screwdriver with standard handle

- High precision and accuracy
- Unique torque screwdriver for bits on the market with slip clutch (slipper) in 36° steps and free-running ratchet, e.g. for use in confined installation spaces
- Release accuracy tolerance: ±6% of the set value
- Release mechanism made of high-alloy tool steel with excellent wear resistance for long service life
- Developed and produced by HAZET
- Tested in accordance with DIN EN ISO 6789-2:2017

reddot winner 2025

DESIGN AWARD 2025

EISENaward 2024 WINNER

6.3 1/4"

1/4"



Extended torque range!

0.1 – 1.2 Nm

Made in Germany

6004CT-12

EAN-No. 4000896260041

Large display. Precise results!



Excellent readability thanks to the large numerical display!


SYSTEM 5000CLT
1/2" torque wrench with display and reversible ratchet

- **Click-Lens-Type (CLT) with large display in the viewing window ensures safety for the user**
- ± 4 % release accuracy tolerance of the scale value (in direction of actuation) according to DIN EN ISO 6789-2:2017
- **Torque release**
  – Palpable – due to close-gap release
  – Audible – by "click" sound
- With serial number and calibration certificate
- **HAZET-owned Service Centre:**
  – Can be recalibrated
  – Can be readjusted
  – Eligible for spare parts

No more turning back!

Made in Germany

HAZET No.	Output	l mm	a mm	b mm	Release accuracy tolerance ± %	Nm	Nm	kg	EAN-No. 4000896 +
① 5121-2CLT	12.5 1/2"	435	19.6	44	4	20 – 120	1	5.9 – 37.0	104215
② 5122-2CLT	12.5 1/2"	545	19.6	44	4	40 – 200	1	9,0 – 47.4	104192
③ 5123-2CLT	12.5 1/2"	660	19.6	44	4	60 – 320	2	10.8 – 59.4	104222




Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

SYSTEM 5000-3CT
1/2" torque wrench
100 – 400 Nm

- Accuracy: ± 3 % of scale value (in direction of actuation for right-hand tightening)
- Tested according to DIN EN ISO 6789-2:2017 with calibration certificate and serial number
- Length: 790 mm

- **HAZET-owned Service Centre:**
  – Can be recalibrated
  – Can be readjusted
  – Eligible for spare parts

Reliable torque for heavy-duty applications!

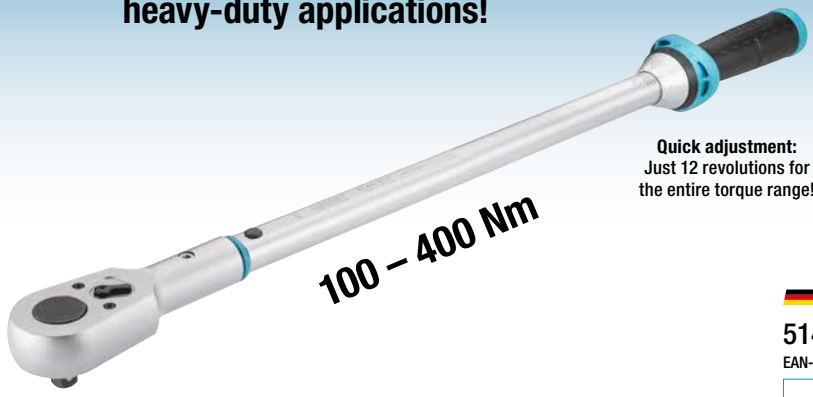

Quick adjustment:
Just 12 revolutions for the entire torque range!

Made in Germany

5143-3CT

EAN-No. 4000896235407


Application recommendation for wheel tightening:
Lightweight truck e.g.: Iveco Daily

Component / assembly (examples)	Typical torque range (Nm)	Example vehicle applications
Axle	120 – 250 Nm	Light commercial vehicles/vans; medium duty trucks; heavy trucks/tractors; buses
Steering	180 – 300 Nm	Medium duty trucks; heavy trucks/tractors; buses
Suspension	180 – 350 Nm	Medium duty trucks; heavy trucks/tractors; buses
Engine	200 – 350 Nm	Light commercial vehicles/vans; medium duty trucks, heavy trucks/tractors; buses
Design/frame	200 – 380 Nm	Medium duty trucks; heavy trucks/tractors

Note: The specified ranges (100-400 Nm) are practical guide values and may deviate depending on the OEM, model, year of construction and screw quality. Always follow the vehicle manufacturer's specifications

The 5143-3CT torque wrench is a reliable tool that was developed for a wide range of needs. Whether working on the central screw connection of the axle or the tightening of large body structures with a high torque – this all-rounder covers a wide range of applications and ensures precise and safe results.

No more turning back!



SYSTEM 5000-3CT
3/4" torque wrench
300 – 800 Nm

- Accuracy: ± 3 % of scale value (in direction of actuation for right-hand tightening)
- Tested according to DIN EN ISO 6789-2:2017 with calibration certificate and serial number
- Length: 1,271 mm

- **HAZET-owned Service Centre:**
  – Can be recalibrated
  – Can be readjusted
  – Eligible for spare parts



3

NEW SET!



Made in Germany

5145-3CT/3

EAN-No. 4000896281688

Including FREE items!

197-3
Magnetic cup,
∅ 150 mm



9013MTT
Twin Turbo
3/4" impact wrench

Max. loosening torque:
1,890 Nm



Comparison of **9013MTT** with **9013TT**

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

OFFICIAL SUPPLIER

PORSCHE MOTORSPORT

HAZET® Das Werkzeug

NEW!

Strictly limited!

911 pieces

Exclusive torque wrench set in unique design!

RACEBORN



In high-quality gift packaging

1x key ring



5122-3CT-PD
40 – 200 Nm


Limited-edition badge with consecutive number

s 17 mm



s 19 mm





- Chrome-plated impact socket
- Plastic sleeve protects rim surface
- Internal plastic insert to protect the surface of wheel bolts

Made in Germany

5122/4-PD

EAN-No. 4000896284566

1/2" impact wrench

- Max. loosening torque: 1,890 Nm, determined with screw size M16
- High performance twin hammer mechanism
- Easy to use
- Reduced vibrations
- Max. tightening torque: 1,290 Nm
- Revolutions per minute: 8,300
- Air requirement: 113 l/min
- Sound pressure level: 96.8 db(A) Lp A
- Vibration acceleration: 13.54 m/s²
- Weight: 2 kg

12⁵ 1/2"

NEW!

1/2"



9012EL-1
EAN-No. 4000896277162




One-hand operation by changeover on rear of device



Exhaust air is guided downwards through the handle

Max. loosening torque: 1,890 Nm

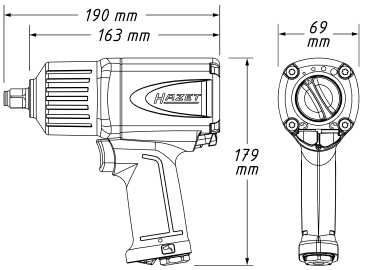

1/2" tyre change set

- 1/2" impact wrench (9012ECO), 1,700 Nm
  – High performance twin hammer mechanism
- Weight: 2.2 kg
- 1/2" impact socket set (903SPC/3)
  – *s* 17 · 19 · 21 mm

12⁵ 1/2" 4

1/2"

s 21 mm

s 17 mm

s 19 mm







Dual protection:
Easy-to-rotate external plastic sleeve (replaceable) to protect the rims when screwing wheel bolts. **Plus**: Internal plastic insert to protect the surface of wheel bolts

9012ECO/4
EAN-No. 4000896281602




One-hand operation by changeover on rear of device



Exhaust air is guided downwards through the handle

Max. loosening torque: 1,700 Nm

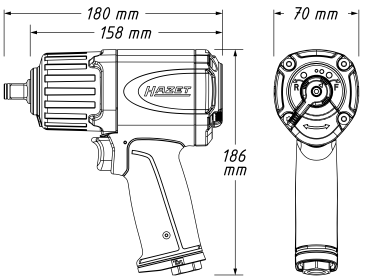


Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

TOTALLY INSPIRING!

HAZET RECHARGEABLE BATTERY SYSTEM – COMPATIBLE WITH ALL DEVICES OF THE 9500 SYSTEM

Cordless orbital sander, 18 volts

- Lightweight, compact, one-hand orbital sander: particularly ergonomic and low-vibration thanks to the special balancing for fatigue-free and low-impact work
- Grinding speed appropriate for the material thanks to the electronic rotation speed setting
- Electronic switch for simple and safe operation with quick-stop function prevents the grinding plates from running on
- Ergonomically designed, practical grip cap with soft-grip insert for a safe grip and good guidance
- The disc brake prevents grinding marks on the workpiece and therefore expensive reworking
- Rotation speed regulation in 4 stages:
  – Stage 1: 4,000 vibrations per minute (rpm)
  – Stage 2: 6,000 vibrations per minute (rpm)
  – Stage 3: 8,000 vibrations per minute (rpm)
  – Stage 4: 10,000 vibrations per minute (rpm)
- Idle stroke rate: 8,000 - 20,000 rpm
- Stroke: 3 mm
- Hook-and-loop grinding disc with multi-hole system for optimal dust extraction; suitable for all standard 150 mm ∅ abrasive materials
- Connection option for external dust extraction with 27 mm ∅
- Integrated extraction with dust filter bag
- Weight (without rechargeable battery): 1.23 kg
- Sound pressure level Lp A: 81 dB(A)
- Sound power level Lp W: 89 dB(A)
- Vibration acceleration: 4.2 m/s²

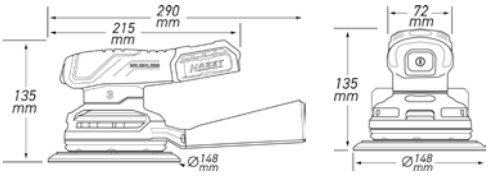



NEW!



Without rechargeable battery and charger



18V

- **Contents:**
  – Basic unit
  (without rechargeable battery and charger)
  – Short dust extraction adapter
  – Long dust extraction adapter
  – Dust collection bag
  – Hexagon key

9533-2
EAN-No. 4000896278787







Li-ion battery pack (18 volts) and spare parts

3



① 2,5 Ah



② 5Ah



③



④





3-piece set
– Quick charger
– 2x 5 Ah



⑤
⑥
⑦

	HAZET No.	Designation		EAN-No. 4000896+	
①	**9500-025**	18 V Li-ion battery pack 2.5 Ah	1	265138	
②	**9500-05**	18 V Li-ion battery pack 5 Ah	1	266166	
③	**9501-1018**	Quick charger for 18 V batteries	1	265114	
④	**9500-05/3**	Battery starter kit. Quick charger + 2x rechargeable battery pack 5 Ah	3	265251	
⑤	**9033-180/10**	Grinding pad set, grain size 80	10	139330	
⑥	**9033-1120/10**	Grinding pad set, grain size 120	10	139354	
⑦	**9033-1150/10**	Grinding pad set, grain size 150	10	139361	

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

1/4" air ratchet

6.3 1/4"


NEW!

- Sound power level: 96.43 db(A) Lp W
- Sound pressure level: 85.43 db(A) Lp A
- Vibration acceleration: 15 m/s²
- Revolutions/minute: 300 rpm
- Air requirement: 86 l/min
- Weight: 0.58 kg

Max. loosening torque: 35 Nm







9020ECO-1
EAN-No. 4000896279241

3/8" air ratchet

10 3/8"


NEW!

- Sound power level: 96.36 db(A) Lp W
- Sound pressure level: 85.36 db(A) Lp A
- Vibration acceleration: 14.98 m/s²
- Revolutions/minute: 330 rpm
- Air requirement: 86 l/min
- Weight: 0.58 kg

Max. loosening torque: 45 Nm







9021ECO-1
EAN-No. 4000896279203

1/2" air ratchet

12.5 1/2"


NEW!

- Sound power level: 97.46 db(A) Lp W
- Sound pressure level: 86.46 dB(A) Lp A
- Vibration acceleration: 15 m/s²
- Revolutions/minute: 180 rpm
- Air requirement: 102 l/min
- Weight: 1.2 kg

Max. loosening torque: 80 Nm





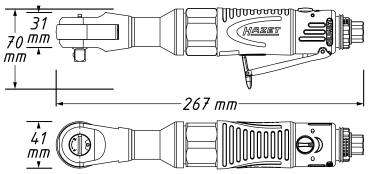

9022ECO-1
EAN-No. 4000896279227

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

1/2" impact ratchet extension

- For loosening hard-to-reach screws
- Passenger car sector, for example working on the chassis
- Construction and metal construction, e.g., when bolting together steel constructions
- Agricultural and commercial vehicle sector, e.g., for repairs on tractors, trailers, and devices, or for loosening
- High occupational safety thanks to reaction-free striking mechanism
- Low-impact
- Compact design
- Max. loosening torque: 170 Nm (at least with an input torque of 675 Nm)
- Max. tightening torque: 170 Nm
- Weight: 1.26 kg

125 1/2" 125 1/2"


NEW!

Suitable for manual retightening with torques > 270 Nm

Max. loosening torque: 170 Nm



1/2"

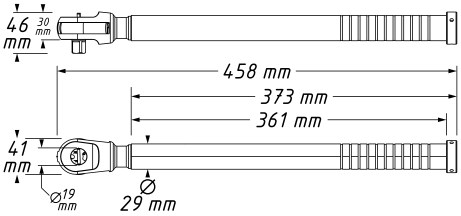

Recommendation

- **Compressed air:** 1/2" impact wrench (2,200 Nm) 9012TT
- **Rechargeable battery:** 1/2" cordless impact wrench (950 Nm) 9512-950



With 1/2" impact wrench (compressed air)

Input torque Nm	Output torque Nm
135	54
270	80
400	117
540	127
675	170

9022AR-1

EAN-No. 4000896281466












Turbo air blow gun

- **New turbo air blow gun with sophisticated extension system:** Thanks to the modular tubes, the entire length can be flexibly adjusted in three stages - ideal for precision work in tight spaces, as well as in hard-to-reach places
- Swirl nozzle generates strong air pulse
- Cleaning dirty surfaces such as seat cushions, floor mats (pet hair)
- For vehicle detailing, e.g. wheel arches, rims
- For cleaning parts with compressed air, as well as for preparatory cleaning work during the disassembly and assembly of parts
- Very practical design
- Operating pressure (bar): 6.3 bar
- Coupler plug: nominal size 7.2 (included)
- Air inlet: inside thread 12.91 mm (1/4")
- Air requirement: 80 l/min
- Max. working pressure: 12 bar
- Sound pressure level: 90 db(A) Lp A
- Sound power level: 100 db(A) Lp W
- Vibration acceleration: < 0.38 m/s²
- Hose diameter (recommended): 10 mm
- Net weight: 218 g

NEW!



Overall length can be flexibly adjusted in three stages!

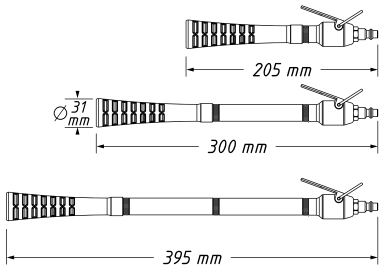

9040T-LG-1
EAN-No. 4000896283507





Open hose reel

- Automatic hose reel offers tidiness in the workshop – hose not left lying around, thus reducing the risk of accidents
- Robust steel design with roller guide
- For compressed air
- Air inlet thread: 1/2“ (BSP) fittings
- End stop
- Spring return with ratchet locking holders
- Hybrid polymer hose, black
- Integrated roller inlet
- Open design against accumulation of dirt
- Operating range to max. 20 bar
- Length of connection hose: 2 m
- Drill template on cardboard packaging for easy installation
- To be used with HAZET safety clutch 9000-062

Hose inside Ø: 13 mm

NEW!




Hose length: 20 m





Installation via metal bracket or swivel base (included)



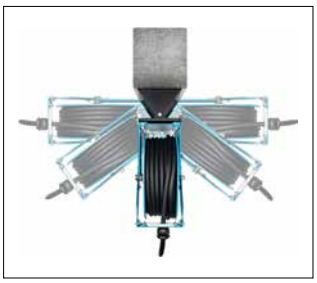

Swivel base – maximum swivel range up to 180°

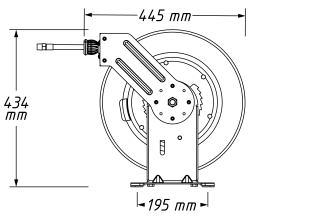

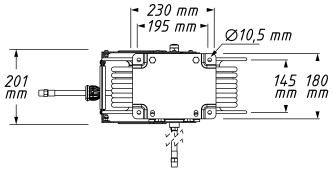


9040OS-13
EAN-No. 4000896273560

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.


Brake piston readjusting pliers for bicycles (4-piston)

NEW!

- Working range: 6 – 15 mm
- For e.g. **SHIMANO · SRAM · TEKTRO · TRP**
- Continuously adjustable locking makes it possible to avoid the use of "bleed blocks" when venting the brake system at a later stage
- Simplifies both resetting brake pistons, as well as bleeding the brake system
- Toggle lever mechanism ensures easy resetting of the brake pistons with little effort
- **Easy application:**
  – Position the pliers between the brake pistons (without brake pads) and press the pliers legs together
  – No need to remove the wheel
- **Safe working:**
  – Parallel spreading process avoids the risk of tilting or damage to the brake pistons, especially in ceramic brake pistons
  – Type of actuation provides users with feedback on the piston's movability

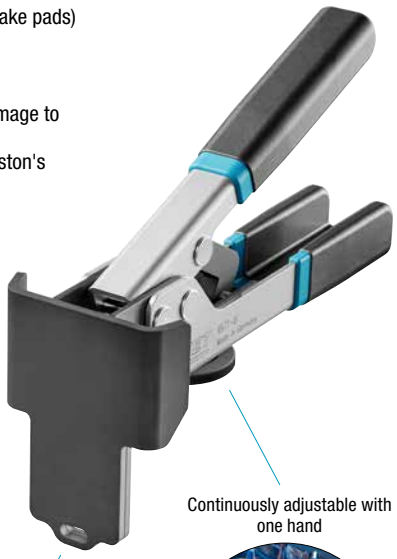

Possible to secure the pliers against falling out



Continuously adjustable with one hand



4-piston

Made in Germany

4971-6

EAN-No. 4000896281909

Brake piston readjusting pliers for bicycles (2-piston)

- Time saving: no need to remove the wheel
- Easy application and safe working
- Pressing back the brake pistons on hydraulic disc brakes on bicycles
- For two-piston brake systems with an opening > 20 mm
- Working range: 4 – 15 mm
- Toggle lever mechanism ensures easy resetting of the brake pistons with little effort
- Comfortable grip thanks to double dip coating
- Can be used, for example with **SHIMANO · SRAM · MAGURA · CAMPAGNOLO · TEKTRO · TRP**




2-piston





DESIGN AWARD 2026

Parallel spreading process avoids risk of tilting or damage to the brake pistons, especially in ceramic brake pistons

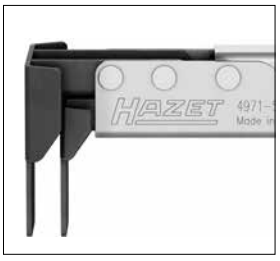

Made in Germany

4971-5

EAN-No. 4000896272754

Insert box-end wrench, open

9 x 12

NEW!


- **Securely seated thanks to 6-point profile**
- Surface: chrome-plated
- Specially optimised for secure and torque-controlled tightening of union nuts on bicycle brake lines
- Can be used with HAZET torque wrench 5280-3CT
- Tightening torque maximum: 15 Nm





Made in Germany

HAZET No.	s mm	Drive	l mm	l_2 mm	a mm	a_1 mm	b mm	EAN-No. 4000896+	
6612C-8	8	9 x 12	40	17.5	12	20	20	277087	



Operation of union nuts on bicycle brake lines!

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.



PEDAL AND CONE WRENCHES: POWERFUL, PRECISE AND RELIABLE!

- High-precision laser-cut for optimum dimensional accuracy
- Tempered steel as a guarantee of a long service life
- Carefully rounded edges to protect the periphery of the bicycle
- High-quality 2-component handle for improved ergonomics
- Hole in the handle for hanging on workshop walls

Inside hexagon pedal wrench set including 3 bits

4

NEW!

- Wrench for pedals with inside hexagon
- Extra-long lever for fixed screw connections
- Robust design with large 5/16" bits
- Integrated bit extractor
- Changeable bits allow for multiple uses
- Length: 330 mm

Contents:

– 2275F-1 inside hexagon pedal wrench
– 2206-6 s 6 mm
– 2206-8 s 8 mm
– 2206-10 s 10 mm



Ergonomically shaped handle for optimal power transmission!



Incl. bit extractor – facilitates bit removal





Made in Germany

2275F-1/4

EAN-No. 4000896280742

Inside hexagon pedal wrench



Made in Germany

2275F-1

EAN-No. 4000896278848

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.



Outside hexagon pedal wrench

NEW!

- Wrench for pedals with outside hexagon
- Extra-long lever for fixed screw connections
- Length: 330 mm

Made in Germany

2275F-2

EAN-No. 4000896278824




s mm
15

Extra-long lever!



Precise wrench size



Ergonomic 2-component handle

Cone wrench

- For the disassembly, assembly and setting of wheel hubs, pedals, axles, bearings and suspension forks
- **2 mm material thickness for optimal accessibility**
- Sizes *s* 13 · 14 · 15 · 16 · 17 · 18 · 19 · 20 · 21 · 22 · 23 · 24 · 26 · 28 mm



Extra-slim design for optimal accessibility!

Made in Germany

NEW!

HAZET No.	s mm	l mm	EAN-No. 4000896+	
450F-13	13	220	278442	
450F-14	14	220	278466	
450F-15	15	220	278480	
450F-16	16	220	278503	
450F-17	17	220	278527	
450F-18	18	220	278541	
450F-19	19	220	278565	
450F-20	20	230	278589	
450F-21	21	230	278602	
450F-22	22	230	278626	
450F-23	23	230	278640	
450F-24	24	230	278664	
450F-26	26	230	278688	
450F-28	28	230	278701	

Cone wrench set, 6 pieces

- **Contents:**
  - 2x 450F-13
  - 2x 450F-15
  - 2x 450F-17

NEW!

Made in Germany

450F/6

EAN-No. 4000896284016

6

Cone wrench set, 10 pieces

- **Contents:**
  - 450F-13 · 450F-14 · 450F-15 · 450F-16 · 450F-17 · 450F-18 · 450F-19 · 450F-20 · 450F-21 · 450F-22

NEW!

Made in Germany

450F/10

EAN-No. 4000896283996

10





For precise bearing settings!



Precise wrench size



Ergonomic 2-component handle

VIDEO BORESCOPES WITH HD CAMERA – OPTIMAL DETAIL ACCURACY!





HD touch screen borescope set with swivelling probe 360°, Ø 3.9 mm

NEW!

- Diagnosis and documentation of cavities for damage assessment
- Split screen function: recording and live image side by side

5-piece set in HAZET L-Boxx:
- Basic unit 4812-26G
- HD swivel probe 4812-26AW
- Power supply: 5 volts · 3 Ampere
- Micro HDMI cable (A to D) 1.5 m
- USB-C cable (A to C) 1 m

Fully articulating probe with Ø 3.9 mm

Probe length: 1.5 m

HD camera for optimum detail




Probe can be locked in the desired bending angle



Swivelling magnetic base: 180° adjustable



Swivelling probe head

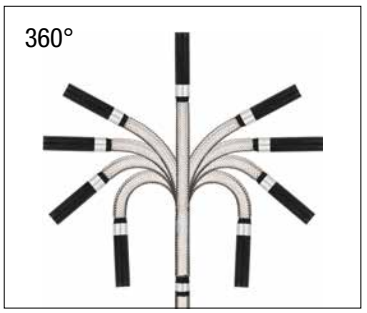

4812-26/5AW	
Camera probe	Ø 3.9 mm articulating probe with front camera (axial 180°, radial 360°)
Display	127 mm (5 inch) touchscreen colour display (sunlight readable) with Li-ion rechargeable battery and magnetic holder
Zoom	3 x
Display resolution	800 x 480 pixels
Brightness setting	10-stage (5 + 5 boost)
Energy source	Li-ion rechargeable battery
Image format (jpg)	1920 x 1080 pixels with optional watermark and timestamp
Video format (MP4)	1920 x 1080 pixels with optional watermark, timestamp and audio
Data transfer	USB-C
IP protection rating	IP54
Handling	Swivelling magnetic base: 180° adjustable
Tripod thread	Thread to hold a tripod screw connection (1/4") in the magnetic base
Connectivity	HDMI port for video output / video output: micro HDMI
Weight	705 g
Dimensions (L x W x H)	162 x 128 x 46 mm

L-BOXX 5



4812-26/5AW
EAN-No. 4000896281503

HD swivelling probe 360°, Ø 3.9 mm, front camera

- Including control unit
- Dimmable, dual LED luminous source
- Compatible with basic unit: 4812-26G · 4812-23G · 4812-11G



4812-26AW
EAN-No. 4000896281282

HD borescope basic unit touchscreen

- Touchscreen colour display with Li-ion battery and magnetic holder



4812-26G
EAN-No. 4000896281329

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

PATENTED CLAMPING JAWS FOR DIFFERENT OETIKER CLAMPS ESPECIALLY ON ELECTRIC VEHICLES!

10 3/8"

NEW!

- Patented clamping jaws for the secure assembly of low-profile clamps on the boot of the homocinetic joint of the cardan shaft
- Suitable for variable clamps: StepLess® type 192 & 168 also as ToothLock® type 292 clamps



Clamp pliers for axle boots, including the patented clamping jaws


- For **VAG** group vehicles **ID Buzz** · **GTX** models (ID3 · ID4 · ID7) · **AMAROK** from 2025 · **MULTIVAN** · **VW** commercial vehicles as well as electric vehicles from **SEAT** · **ŠKODA** · **AUDI**
- Also suitable for **MERCEDES-BENZ** and **BMW** 5-series · 7-series vehicles, as well as future electric vehicles
- **FIAT** Ducato: 2.2 l JTD, model year 2024

Made in Germany

1847-23

EAN-No. 4000896285327

Example of a StepLess® clamp type 192 (used in **BMW** 5-series · 7-series)

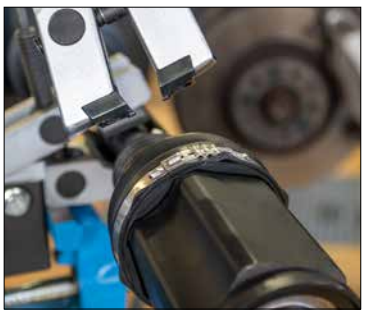

Example of a StepLess® clamp type 168 (used in **BMW** 5-series · 7-series)





Patented clamping jaws for different Oetiker clamps

NEW!

2



Made in Germany

1847-04/2

EAN-No. 4000896285167

Installation of axle boots made of Hytrel, TPU boots and special stainless steel clamps with pre-set torque tightening values, together with e.g. torque wrench HAZET 5110-3CT (Please follow the manufacturer's specifications)



Made in Germany





HAZET No.	Designation	Application	EAN-No. 4000896 +	
① **1847**	Clamp pliers for axle boots	For installing axle boots made of Hytrel and bands made of special stainless steel with pre-set torque values, in conjunction with e.g. torque wrench HAZET 5110-3CT	050918	
② **1847-90**	Clamp pliers for axle boots, angled 90°	Clamp pliers 90° for activating stainless steel bands with specified torque tightening values	206728	
③ **1847-22**	Steering gear boot clamp pliers	For steering gear boots **AUDI** A4 / A5 / A6 / A7 / Q5	175185	

Hose clamp set

- Rotating jaws - for use in areas with restricted access where the clamp cannot be easily reached directly



3

NEW SET!



798-3 AUDI · VW · OPEL/VAUXHALL · PEUGEOT · SMART · MERCEDES-BENZ



798-5 VW · AUDI · OPEL/VAUXHALL



798-13 VW · AUDI · SEAT · ŠKODA


Made in Germany

798/3N

EAN-No. 4000896281749

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

Injector adapter set, 7-piece



NEW!


Made in Germany

9098/7

EAN-No. 4000896283187

7

With additional space for adapter sets 9098-G23/2 and 9098-H2/3

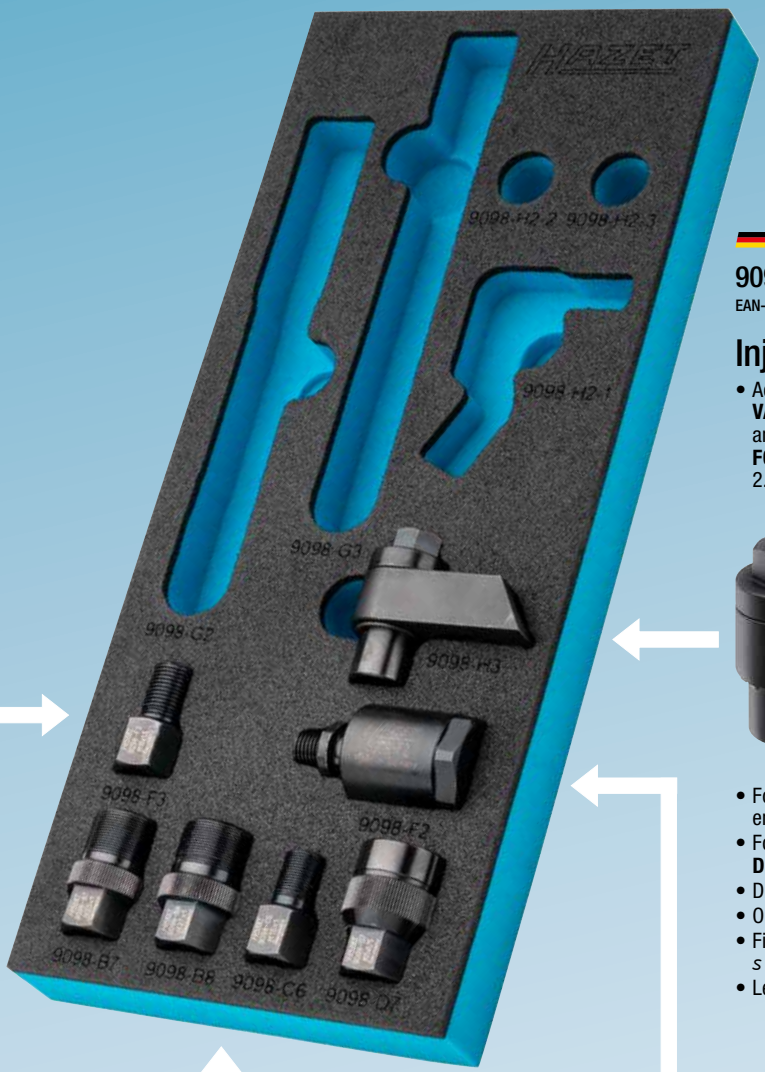

Made in Germany


9098-F3

EAN-No. 4000896277629

Injector connector

- Adapter enables use of HAZET injector claws 4797-2 and 4797-9 as well as external adapter 4797-3 with HAZET injector impact extractor (pneumatic) 9098/24
- Drive inside thread: M14x1.5
- Output outside thread: M16x1.5
- Outside hexagon: *s* 22 mm
- Length: 42 mm





Made in Germany

9098-H3

EAN-No. 4000896277827

Injector removal adapter

- Adapter for dismantling injectors on: **VAG** vehicles with 1.6 l · and 2.0 l TDI engines from model year 2004→ **FORD** EcoBlue 2.0 l motors, 2.0 l diesel, model year 2022→





- For common rail injectors of **VAG** · **FORD** engines
- For **BOSCH** (piezo and magnetic types) · **DELPHI** · **DENSO** · **VDO** injectors
- Drive lateral, inside thread: M14x1.5
- Output inside thread: M14x1.5
- Fixing screw hexagon: *s* 17 mm · ∅ 21.8 mm
- Length: 70 mm

Made in Germany

9098/4

EAN-No. 4000896277728

Injector adapter set, 4-piece

- Adapters are used when the injector claw cannot be used, either because of the vehicle type or because of a lack of space
- Thread sizes: outside thread M25 x 1 · outside thread M16 x 1 · outside thread M27 x 1 · inside thread M25 x 0.75

4

Contents:

- **9098-B7** (outside thread M25 x 1 · inside thread M14 x 1.5) **for SIEMENS · SIEMENS-VDO (CONTINENTAL)** injectors e.g. **PSA · VW · AUDI · SEAT · ŠKODA**
- **9098-B8** (outside thread M27 x 1.0 · inside thread M14 x 1.5) for **SIEMENS**, **SIEMENS-VDO** (**CONTINENTAL**) e.g. **PSA · FIAT · PEUGEOT · CITROËN · MERCEDES-BENZ**
- **9098-C6** (outside thread M16 x 1.0 · inside thread M14 x 1.5) for **DENSO** injectors e.g. **TOYOTA · LEXUS · RENAULT · OPEL/VAUXHALL**
- **9098-D7** (inside thread M25 x 0.75 · inside thread M14 x 1.5) for **DENSO** injectors, e.g. **TOYOTA · LEXUS · FIAT · PSA**





Made in Germany

9098-F2

EAN-No. 4000896278725

Injector ball joint connector

- Ball joint adapter enables the impact extractor to be used even where installation space is limited by bypassing interfering components and flexibly deflecting the direction of impact by up to 20° to the side
- Drive: M14 x 1.5
- Output: M14 x 1.5
- Pivoting angle: up to 20°
- Diameter: 35 mm
- Length: 69 mm
- Wrench size: *s* 32 mm





Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

Optional upgrade!



9098-G2 9098-G3

2 NEW!

Injector extractor, 2-piece

- Variable working height due to set screw with lock nut
- **9098-G2**
  – Jaw opening 12.5 mm
  – For **BOSCH** and **DELPHI** injectors on **MERCEDES-BENZ** CDI engines (e.g. C, E, S class)
- **9098-G3**
  – Jaw opening 16 mm
  – For **BOSCH** injectors on **PPE** vehicles: **CITROËN** (e.g. C5, Jumpy, Xsara) **PEUGEOT** (e.g. 206, 307, 406, Boxer HDi)
  – As well as for diesel injectors on: **FIAT** DUCATO HDI/JTD · **MERCEDES-BENZ**

Made in Germany

9098-G23/2

EAN-No. 4000896280360



Everything in its place!



9098-H2-2 9098-H2-3

9098-H2-1

3 NEW!

Injector adapter set, 3-piece

- C-hook and two union nuts (M14 x 1.5 · M12 x 1.5)
- For Piezo injectors
- Suitable for a variety of **VAG**-TDI engines: **VW** · **AUDI** · **SEAT** · **ŠKODA**

Made in Germany

9098-H2/3

EAN-No. 4000896280421

For injector extractor 9098/24

See SWW 2026, page 60

24





Assistent®

175-7/156 including
156 expert tools

HAZET®
Das Werkzeug

NEW!

ROBUST POWDER-COATED
SHEET STEEL WORK SURFACE!

156

175-7/156

EAN-No. 4000896284887




The best equipment at attractive prices!

Including
HiPer
90 teeth · 4° ·
1000 Nm (1/2")

Assortment

163-701/154

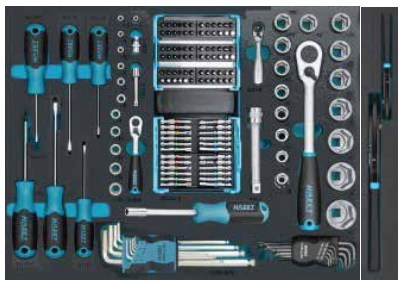

163-691/2A 760-15 · 760-26

Your HAZET specialist dealer:

Valid from 1 September 2026 until 28 February 2027 at the latest.
Errors excepted.

4 000896 285662

SWW2627/EN/XX/0 I. 07.2026 / 2. JK/MD

We accept no liability for printing errors! All rights reserved regarding technical modifications and errors, images may not always correspond to originals and are thus non-binding!
© 2026

Copyright 2026 ©
HAZET-WERK Hermann Zerver GmbH & Co. KG
Güldenwerther Bahnhofstraße 25 – 29,
D-42857 Remscheid, Germany